


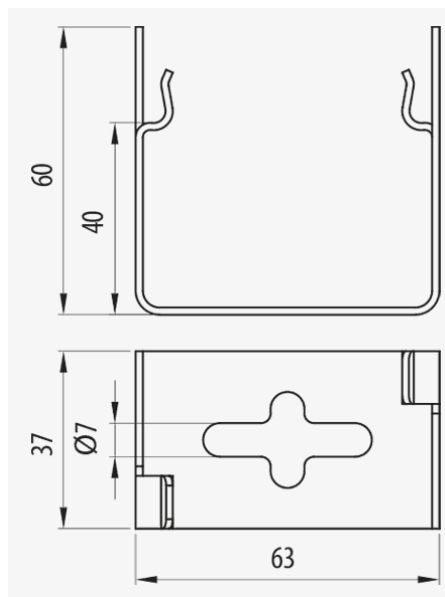

Description

Support in steel used for the ceiling installation of Rejiband® wire mesh tray with a height of 35 and 60 mm and widths of 60, 100 and 150 mm. With INOX protection system, I316L finish. Quick assembly thanks to the Click system of connection without the need of screws. Permissible working load up to 10 kg. Available in various Protection Systems.

Advantages

Available in various protection systems: EZ, BC, GC or high resistance BK8, depending on the type of application.

It allows the introduction of cables into the tray from the side.

For wall installation, use the side holes to secure with a M6 or M8 screw or bolt.

For ceiling installation, use M6 or M8 threaded rod connected through the centre of the bracket.

Fast mount system without the need for screws. Folding the fixing clips secures the tray.

Applications

Suitable for wall and ceiling mounting of the Rejiband® 35x60 and 60x60 mm wire mesh tray.

Solutions



FOOD INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC001003	u	10
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Acero inoxidable AISI 316L
Protection System	INOX	Working temperature range (°C)	-50 / 150 °C
Finish	Stainless Steel AISI 316L	Fire resistance	A1 No combustible
Resistance Class	Class 9D		
kg/u	0,066		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications

