


Light Duty Ceiling Support

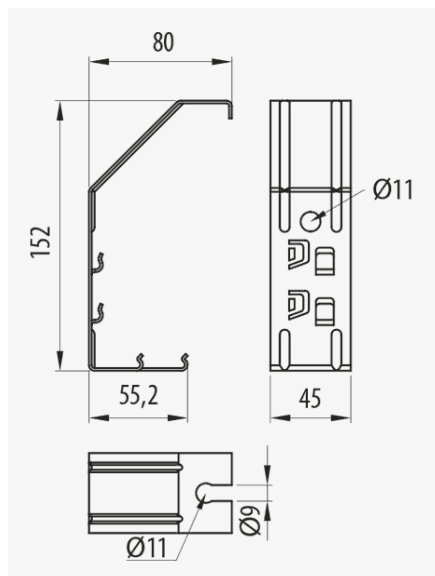

Description

Support in steel used for the ceiling installation of Rejiband® wire mesh tray with a height of 35 and 60 mm and widths of 60, 100 and 150 mm. Quick assembly thanks to the Click system of connection without the need of screws. Permissible working load up to 10 kg. Available in various Protection Systems.

Advantages

Fixing by quick mount click system.

No screws or other fasteners required.

Designed for light loads and trays of small sizes (widths 60, 100 & 150 mm).

It allows the introduction of cables into the tray from the side.

Available in various protection systems: EZ, BC, GC or high resistance BK8, depending on the type of application.

Applications

Suitable for supporting light loads to the ceiling in cable routing in small size Rejiband® trays for electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Light Duty Ceiling Support

Main technical characteristics

 10	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC001003
---	--	--	---	---------------------

Product data

		Ref	kg/u	
EZ	Class 3	62016020	0,132	15
GC	Class 8	62036020	0,136	10
BK8	Class 8	62086020	0,133	10

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber


PET - Thermoplastic Polyester

TPV - Thermoplastic




Light Duty Ceiling Support


Product applications

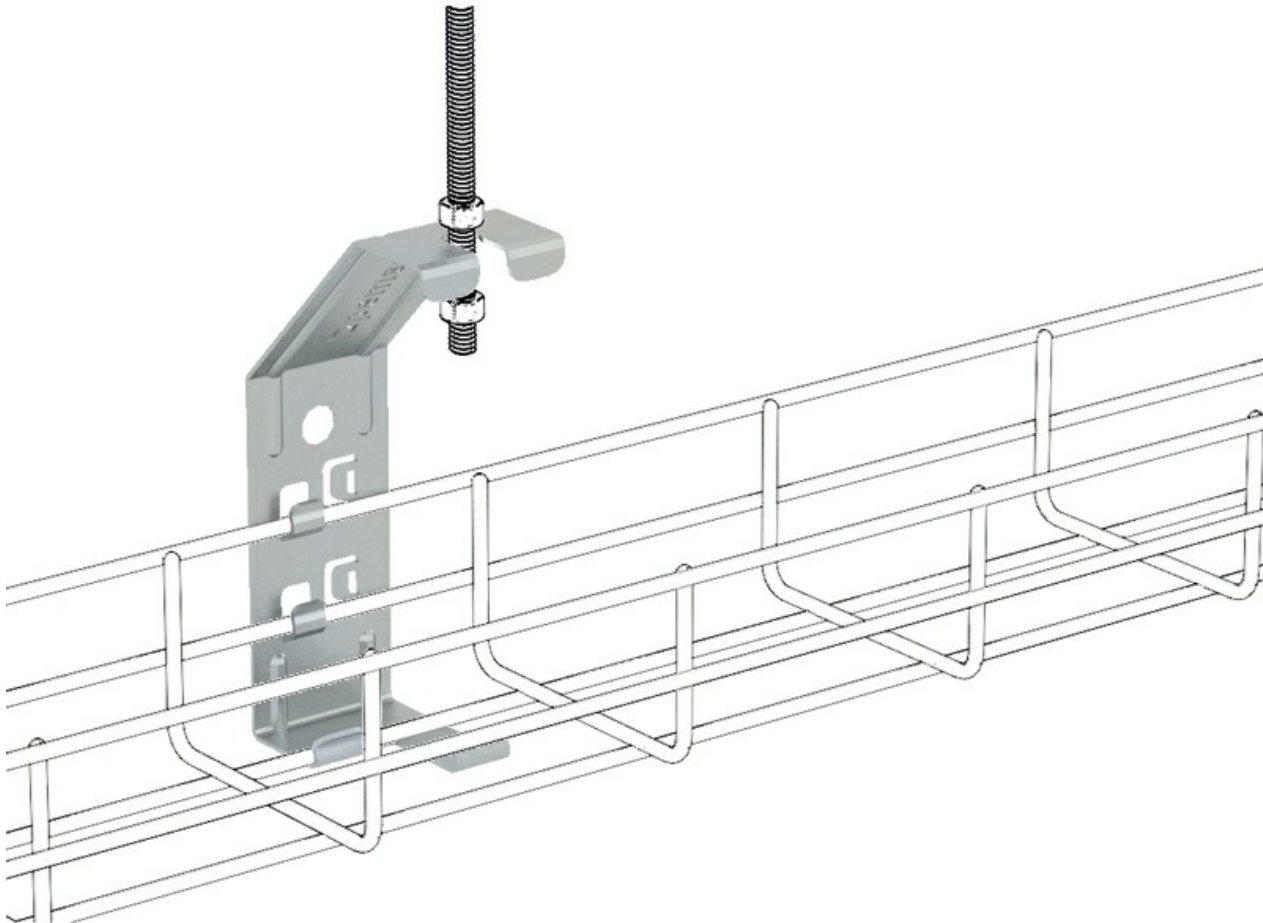

Light Duty Ceiling Support

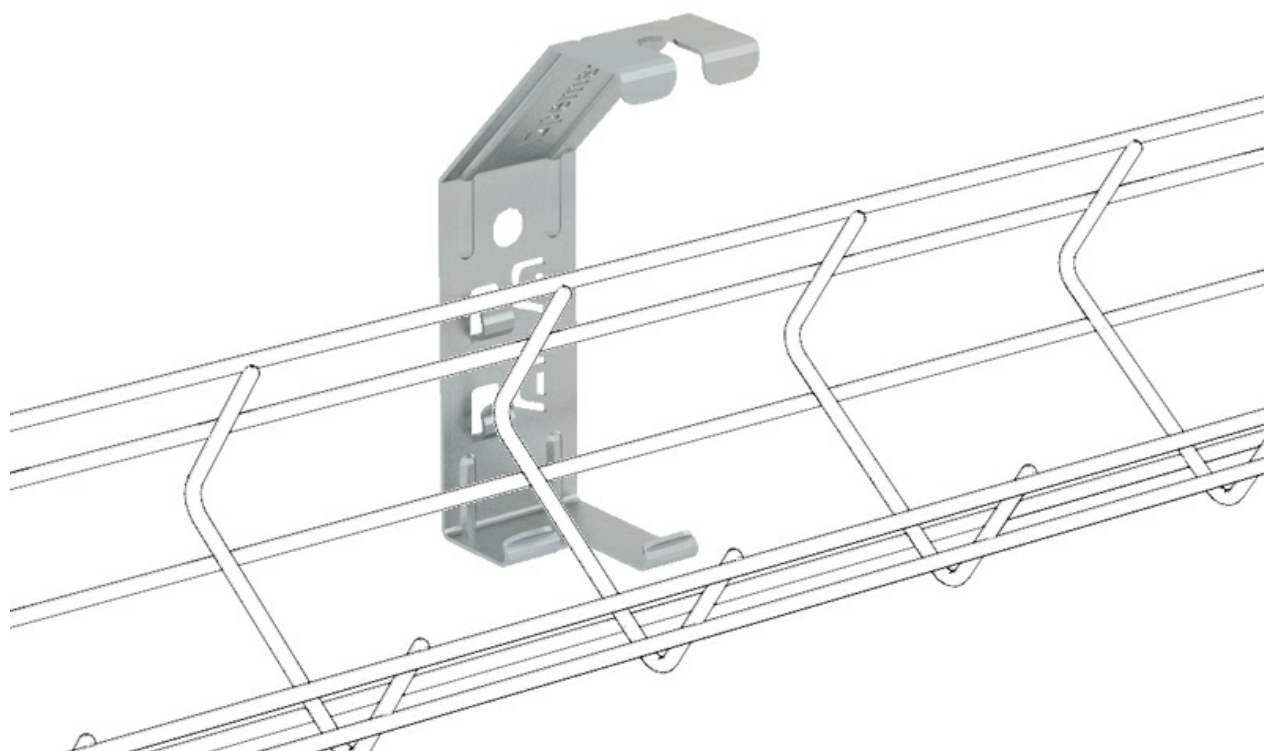

Light Duty Ceiling Support

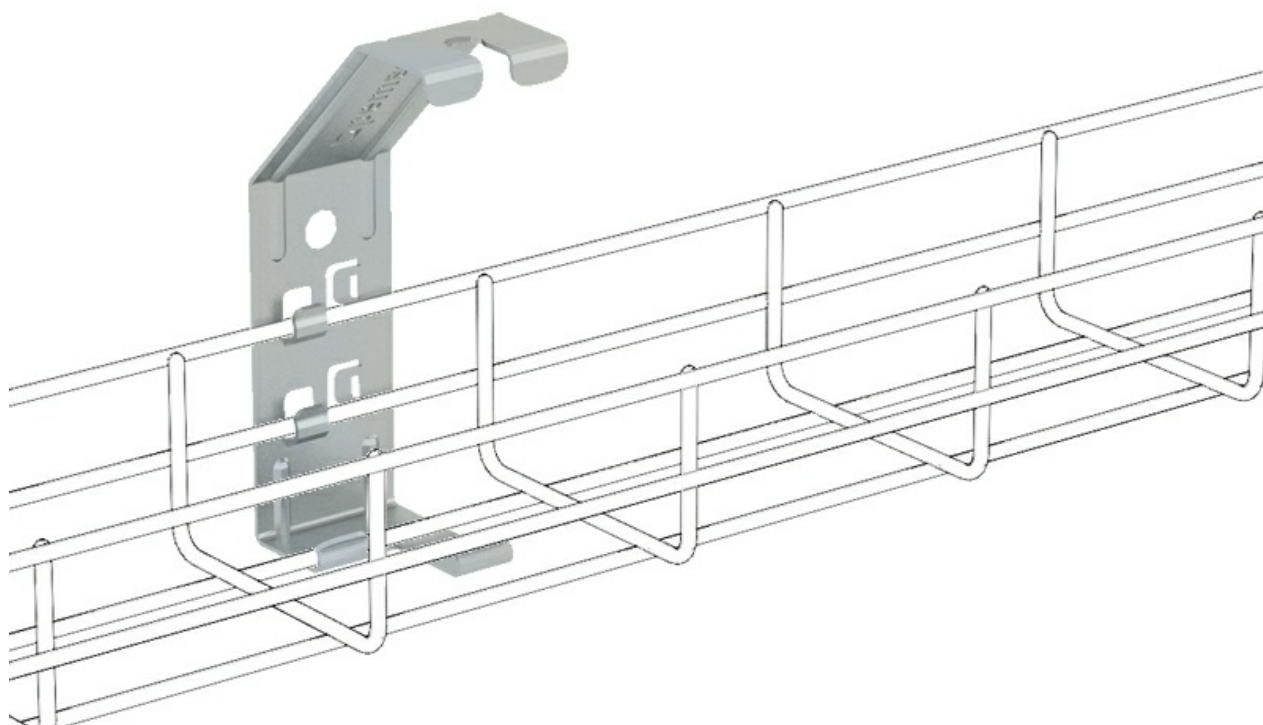

Light Duty Ceiling Support

