


Light Duty Ceiling Support

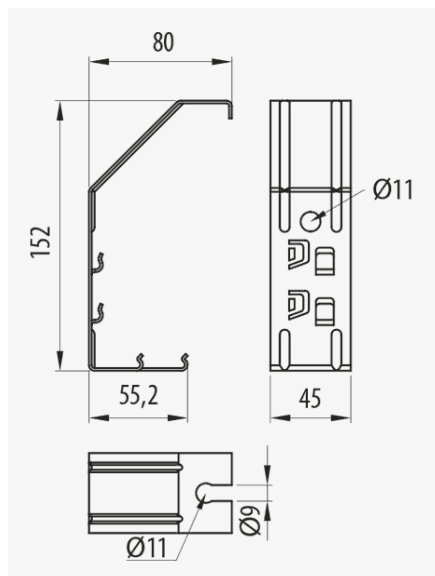

Description

Support in steel used for the ceiling installation of Rejiband® wire mesh tray with a height of 35 and 60 mm and widths of 60, 100 and 150 mm. Quick assembly thanks to the Click system of connection without the need of screws. Permissible working load up to 10 kg. Available in various Protection Systems.

Advantages

Fixing by quick mount click system.

No screws or other fasteners required.

Designed for light loads and trays of small sizes (widths 60, 100 & 150 mm).

It allows the introduction of cables into the tray from the side.

Available in various protection systems: EZ, BC, GC or high resistance BK8, depending on the type of application.

Applications

Suitable for supporting light loads to the ceiling in cable routing in small size Rejiband® trays for electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Light Duty Ceiling Support

Main technical characteristics

 10	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC001003
--	--	--	---	---------------------

Product data

		Ref	kg/u	
EZ	Class 3	62016020	0,132	15
GC	Class 8	62036020	0,136	10
BK8	Class 8	62086020	0,133	10

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass


 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic




Light Duty Ceiling Support


Product applications

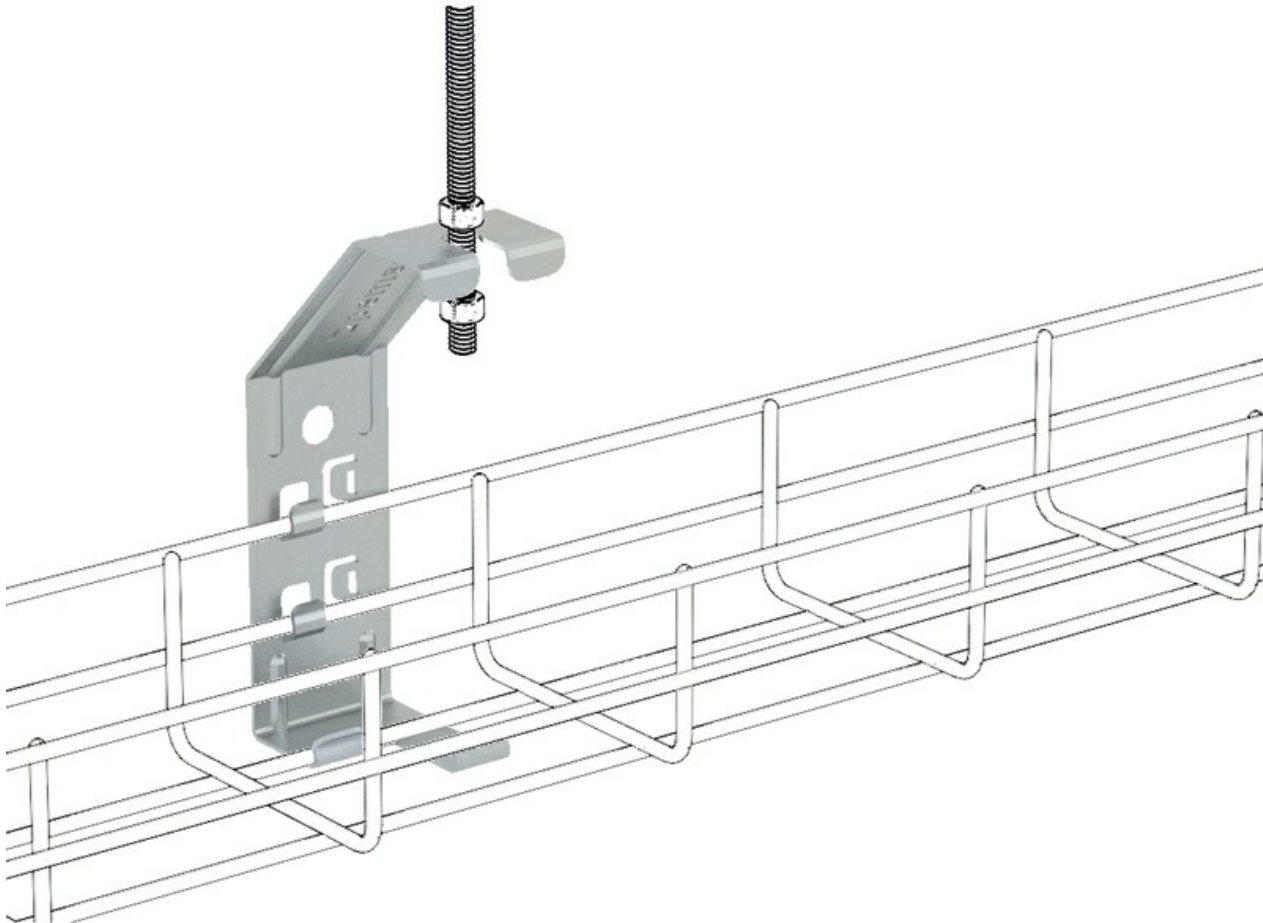

Light Duty Ceiling Support

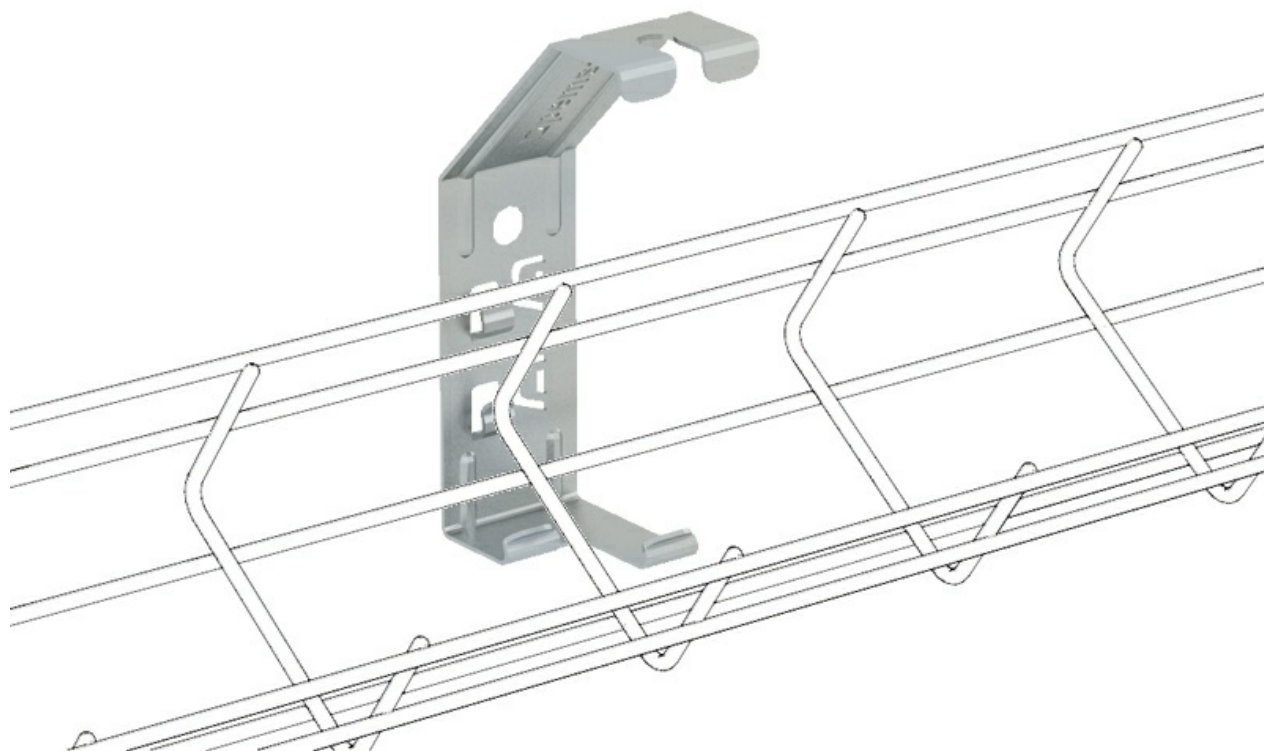

Light Duty Ceiling Support

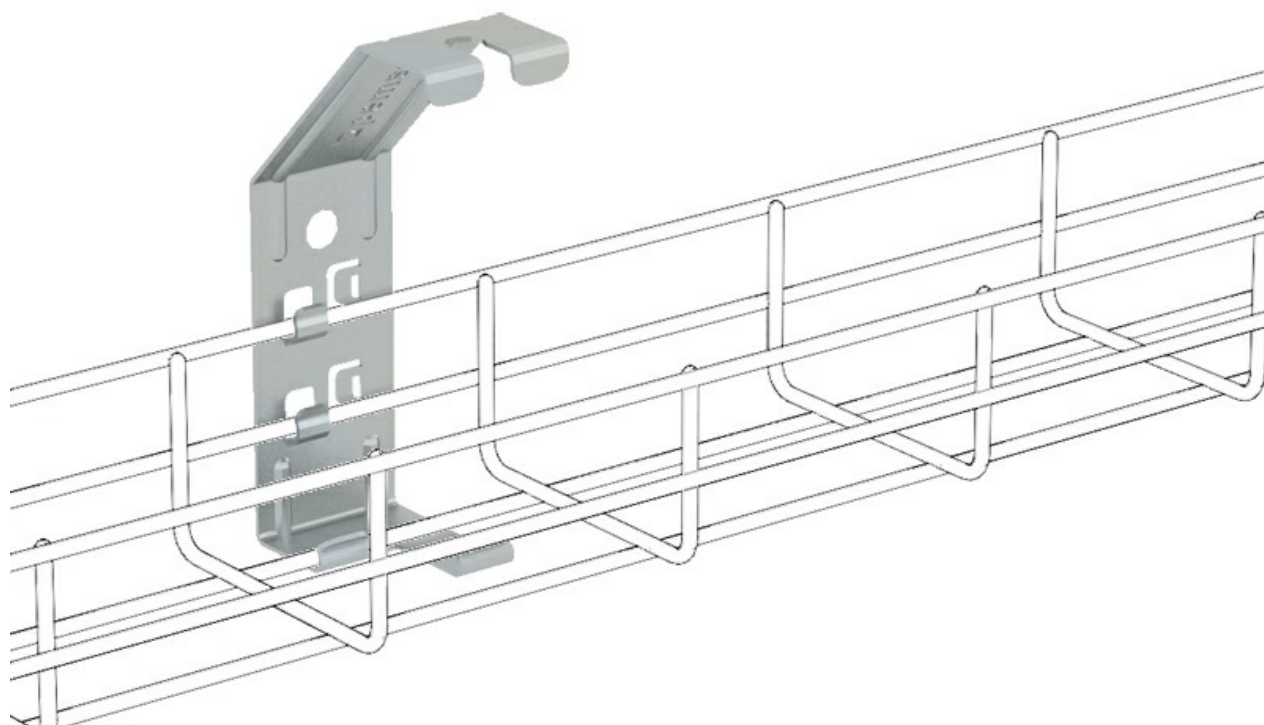

Light Duty Ceiling Support

