


## Solar Totem

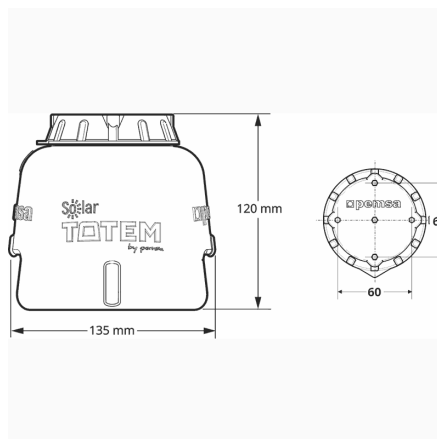

### Description

Multifunctional raised mounting Support for Wire mesh tray and Cable tray installations and other functional assemblies for cable management in Solar Roof installations and other general applications on roofs. The system consists of a watertight container, closed by a threaded cap that guarantees its tightness while providing on its external part the necessary housings for fixing the different anchoring accessories for the cables trays or conduits to be installed. It is supplied in Kit format, including additional parts for fixing these cable management systems such as a Central Hanging plate with BK8 protection system, 2 units of the self-locking screw, and 2 units of flat washers in INOX protection system, I304 finish.

### Advantages

Suitable for support to the floor in solar roofs of wire mesh trays, perforated cable trays, or conduits for cable management.

To increase the weight it can be filled with water, sand or concrete

It has a safety indicator for closure of the cap and markings to align the installation.

Optimized base for application of mounting adhesive for fixing on even surfaces where drilling is not possible.

Recommended for distance between supports of 1 to 1.5 meters

### Applications

The Solar Totem installation is suitable for: - Photovoltaic installations in flat solar roofs where drilling is not possible - Flat solar roofs on waterproof asphalt sheets - Solar roofs on concreted ground or with a gravel layer. - Intermediate point for the creation of a support point for installations with large spans or distances between supports. - Support and elevation of cable trays on the ground in industrial or tertiary facilities.

### Solutions



FOTOVOLTAICA EDIFICACIÓN. TERCIARIO



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."









Main technical characteristics

ETIM  
EC000022

Product data

COLOUR	Ref	kg/u			CTA ↓ ↓ ↓		
Black RAL 9005	82003450	0.199	4	POLIETILENO,POLIPROPILENO	100	-15 / 90 °C	A1 No combustible

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."





Load diagrams

Características técnicas		
Technical features		
	Altura <i>Height</i>	120 mm
	Diámetro <i>Diameter</i>	135 mm
	Peso con relleno <i>Weight with filling</i>	900 gr
	Material <i>Raw material</i>	Polipropileno y polietileno  <i>Polypropylene &amp; polyethylene</i>
	Carga máxima <i>Maximun load</i>	100 kg
	Distancia entre soportes <i>Support span</i>	1 - 1,5m
	Resistente UV <i>UV resistant</i>	Alta  <i>High</i>
	Temperatura de trabajo <i>Working temperature</i>	-15°C + 90°C

Product applications



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."







