


Click Central Suspension

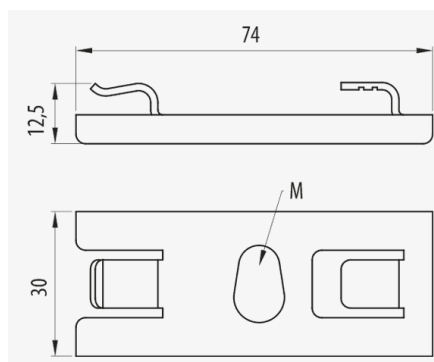

Description

Central mounting bracket, in M6, M8 and M10, for Rejiband® wire mesh tray. It allows the introduction of cables into the tray from the side and saves installation time when mounting it with a single rod and the respective nuts. Quick assembly thanks to the Click system of connection without the need of screws. Available in various Protection Systems.

Advantages

Fixing by quick mount click system.

Optimisation of assembly time.

Recommended for 100, 150 and 200 mm width trays.

It allows the introduction of cables into the tray from the side.

Available in various protection systems: EZ, BC, GC, high resistance BK C8 and passivated stainless steel AISI 316.

Applications

Suitable for the ceiling mounting of Rejiband in widths from 100 to 200 mm by means of a single rod in indoor installations in a dry atmosphere with no contaminants, exterior, industrial, marine, rural or aggressive interior installations.

Solutions



FOOD INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

 M 8, M 6, M10	 20	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC001003
---	--	--	---	---------------------

Product data

				kg/μ		
EZ	Class 3	M 8	67010043	0,029	Steel with surface coating	85
EZ	Class 3	M 6	67010143	0,030	Steel with surface coating	85
GC	Class 8	M 8	67030043	0,030	Steel with surface coating	85
GC	Class 8	M 6	67030143	0,031	Steel with surface coating	85
INOX	Class 9D	M 8	67060043	0,029	Acero inoxidable AISI 316L	85
INOX	Class 9D	M 6	67060143	0,029	Acero inoxidable AISI 316L	85
BK8	Class 8	M10	67080043	0,030	Steel with surface coating	70
BK8	Class 8	M 6	67080143	0,030	Steel with surface coating	85

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials


- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

Click Central Suspension

Product applications



Click Central Suspension

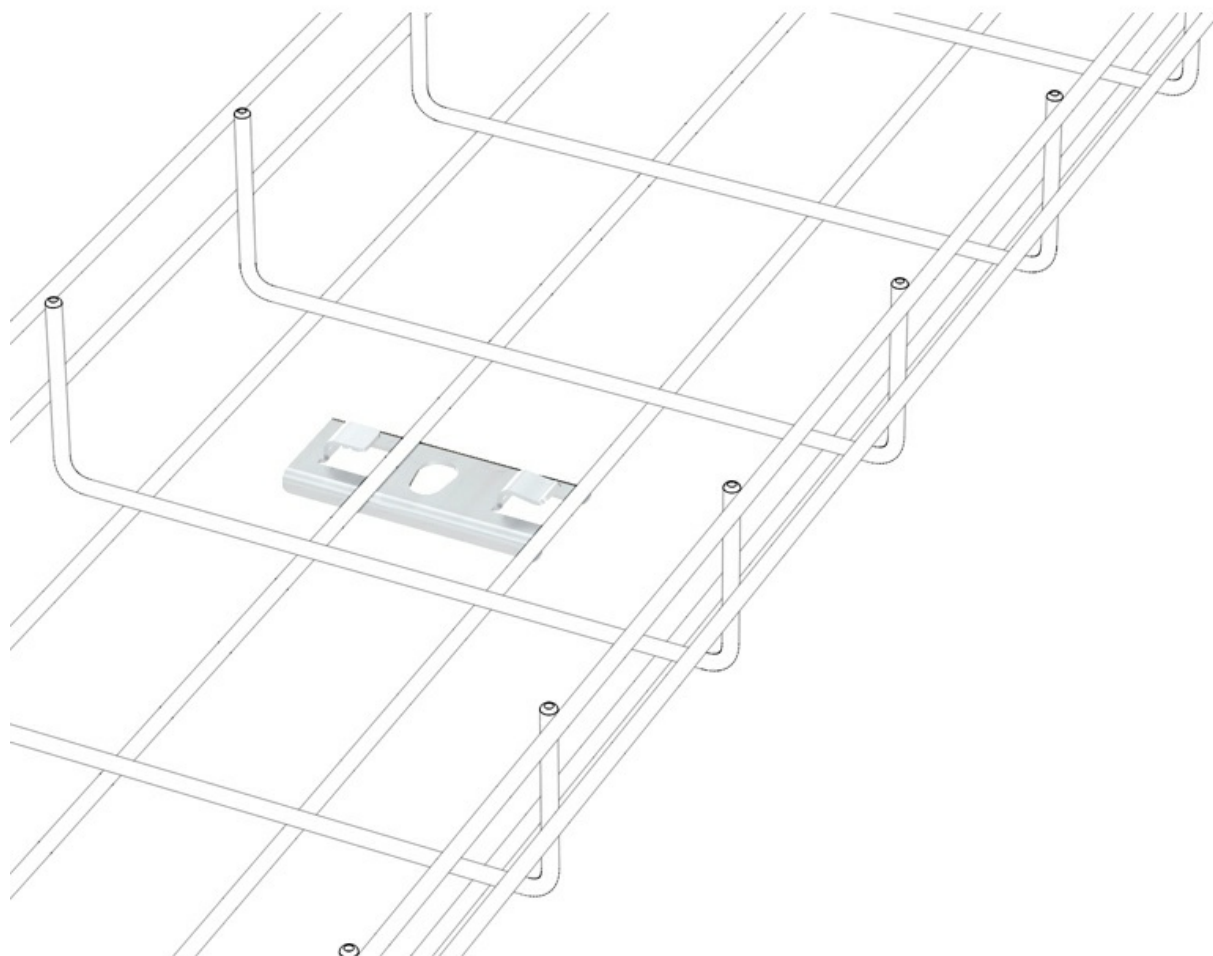

Click Central Suspension

