


Click Central Suspension (Ref: 67060143)

1/8

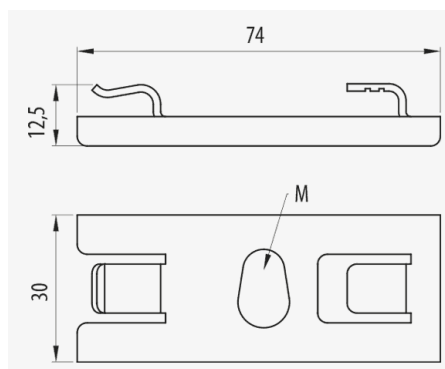

Description

M 6, M 6, With INOX protection system, I316L finish

Advantages

Available in various protection systems: EZ, BC, GC, high resistance BK C8 and passivated stainless steel AISI 316.

It allows the introduction of cables into the tray from the side.

Fixing by quick mount click system.

Recommended for 100, 150 and 200 mm width trays.

Applications

Suitable for the ceiling mounting of Rejiband in widths from 100 to 200 mm by means of a single rod in indoor installations in a dry atmosphere with no contaminants, exterior, industrial, marine, rural or aggressive interior installations.

Solutions



FOOD INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

ETIM 10	EC001003	u	20
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Acero inoxidable AISI 316L
Protection System	INOX	SWL (kg)	85
Finish	Stainless Steel AISI 316L	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 9D	Fire resistance	A1 No combustible
M/PG	M 6		
kg/u	0,029		

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Reijband, Pemsaband, Inducanal, Reijtech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Click Central Suspension (Ref: 67060143)

Product applications




Click Central Suspension (Ref: 67060143)



Click Central Suspension (Ref: 67060143)



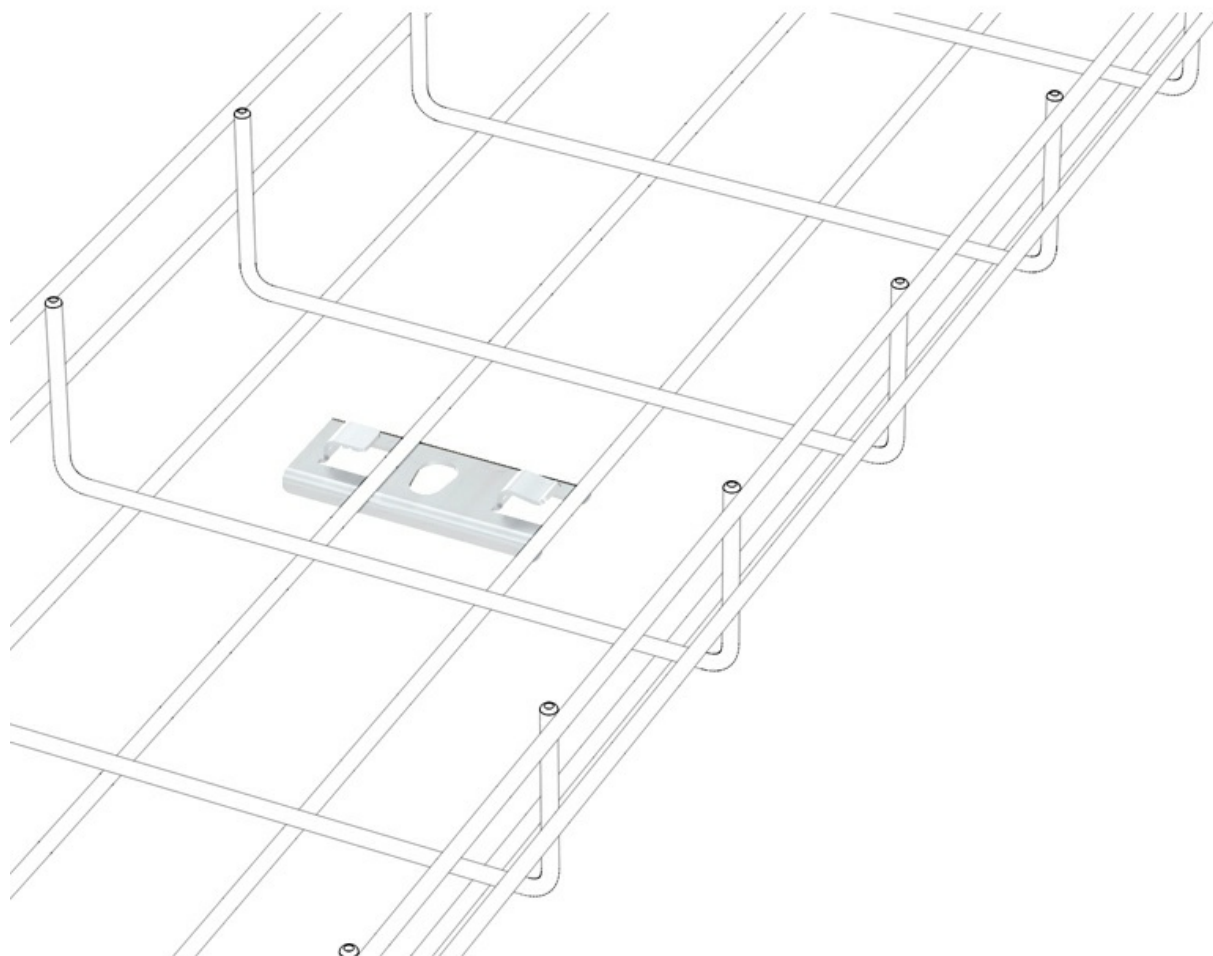



Click Central Suspension (Ref: 67060143)

