
# Suspensión Hanger ( Ref: 81000022 )



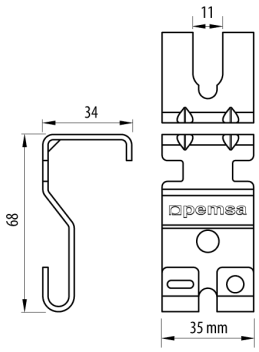


## Description

Side suspension support for ceiling installation of Rejiband® mesh tray with threaded rods. It can be used with heights of 35, 60 and 100mm and widths from 100 to 600mm. This product has quick installation and does not require screws for connection to the system. Made from steel, available in various protection systems. With BK8 protection system

## Advantages

Good load capacity. Up to 100 kg per point for the 2-piece / 2- threaded rod set.

CE certified in compliance with the low voltage directive 2014/35 / EU and international product standard IEC 61537

Available in PG, BK8 and GC protection systems

It allows its disassembly in a simple way to facilitate the laying of the cables.

Click system allows fast connection of the wire mesh tray without the need of fixings. Greater economy and quick assembly.

## Applications

Suitable for supporting medium loads on ceiling-mounted cable trays with 1 or 2 rods for Rejiband® trays for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Suspensión Hanger ( Ref: 81000022 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC000896 | **u** | 18 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | | **Material** | Steel with surface coating |
| **Protection System** | BK8 | **Working temperature range (°C)** | -50 / 150 ºC |
| **Finish** | Zinc Nickel black | **Fire resistance** | A1 No combustible |
| **Resistance Class** | Class 8 | | |
| **kg/u** | 0,059 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Suspensión Hanger ( Ref: 81000022 )

## Product applications

www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."