


Click Divider

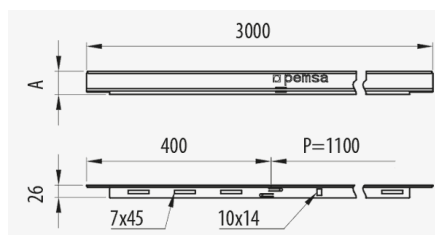

Description

Metal divider with click system for separating different types of wiring in Rejiband® and Pemsaband® trays and Megaband® ladder, available in various heights and Protection Systems. It allows the screening between data and power cables within the same installation.

Advantages

Due to the click system it is not necessary to use fixings when mounting on to Rejiband.

Encourages shielding between data and power cables within the same installation.

Wide adaptability and adjustment thanks to the three heights: 25 mm, 50 mm and 80 mm.

Electrical continuity guaranteed according to standard IEC61537.

Available in various protection systems: PG, GC, BK8, AZ+ and stainless steel AISI 304 and AISI 316L.

Applications

Suitable to create adequate cable separation to improve and correct electromagnetic compatibility in installations of Rejiband®, Pemsaband® tray and Megaband® ladder in indoor installations in a dry atmosphere without contaminants, outdoor, industrial, marine, rural or aggressive indoor installations, environments involving sea water and industrial applications.

Solutions



FOOD INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

 35, 60, 85	 3	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC001000
--	---	--	---	---------------------

Product data

						
PG	Class 3	35	67020610	0,207	60	Steel with surface coating
PG	Class 3	60	67020611	0,309	48	Steel with surface coating
PG	Class 3	85	67020612	0,439	36	Steel with surface coating
GC	Class 5	35	67030610	0,258	60	Steel with surface coating
GC	Class 5	60	67030611	0,381	48	Steel with surface coating
GC	Class 5	85	67030612	0,539	36	Steel with surface coating
INOX	Class 9C	35	67050610	0,204	60	Stainless steel AISI 304
INOX	Class 9C	60	67050611	0,302	48	Stainless steel AISI 304
INOX	Class 9C	85	67050612	0,428	36	Stainless steel AISI 304
INOX	Class 9D	35	67060610	0,204	60	Acero inoxidable AISI 316L
INOX	Class 9D	60	67060611	0,302	48	Acero inoxidable AISI 316L
INOX	Class 9D	85	67060612	0,428	36	Acero inoxidable AISI 316L
AZ+	Class 8	60	81000312	0,386	48	Steel with surface coating

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Click Divider

TPV - Thermoplastic



Product applications

