
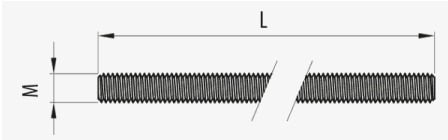


Threaded Rod (Ref: 67010141)

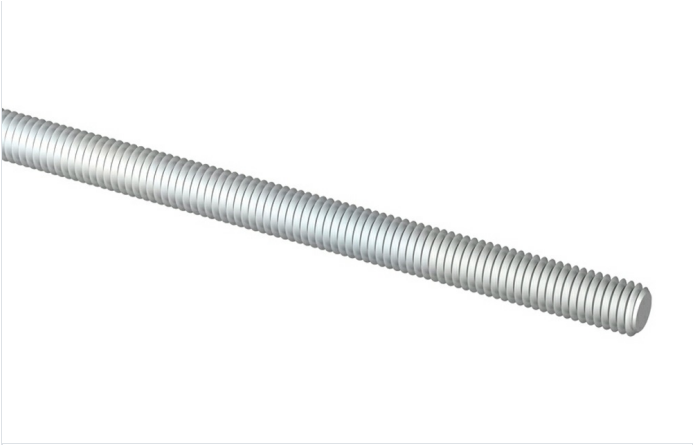

Description

M 6, M 6, [ROSCA]x1000 mm, With EZ protection system, EZ3 finish

Advantages

Applications

Solutions



Product data			
Protection System	EZ	u	50
Resistance Class	Class 3	Material	Steel with surface coating
M/PG	M 6	F (kg)	195
L (mm)	1000	Working temperature range (°C)	-50 / 150 °C
kg/u	0.240	Fire resistance	A1 No combustible

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint


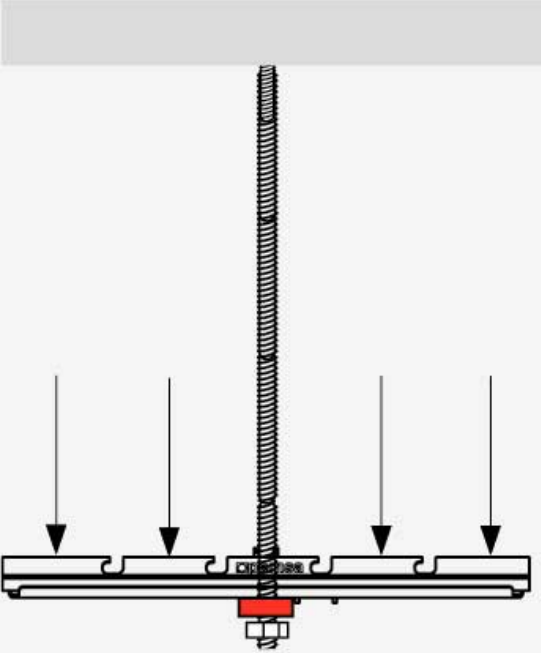
AL - Aluminum


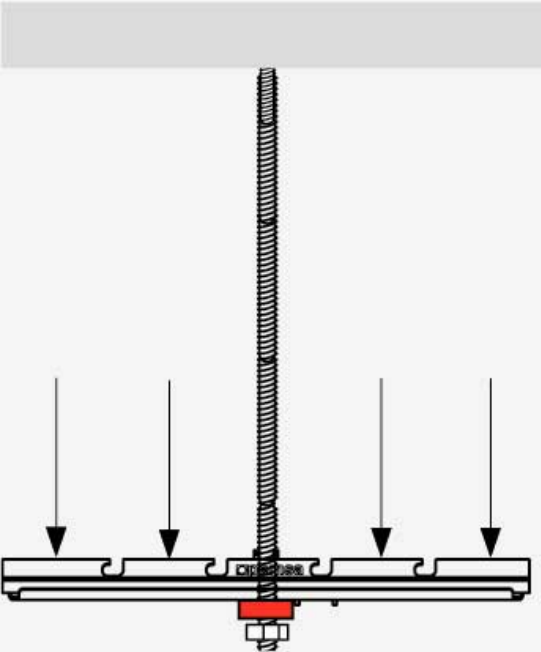
LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Load diagrams

↓CTA↓ (kg)		kg
una varilla / one rod / uma varão		
	100-300	160

↓CTA↓ (kg)		kg
una varilla / one rod / uma varão		
	100-300	160

Product applications



