
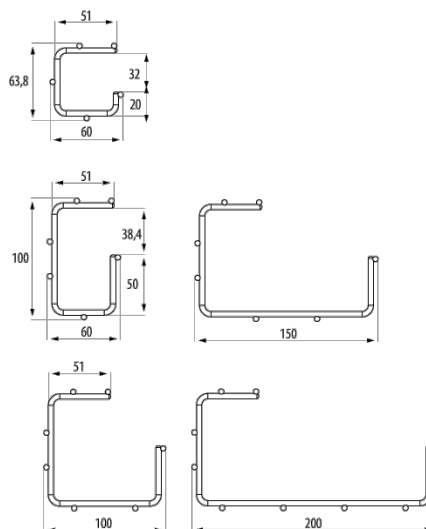


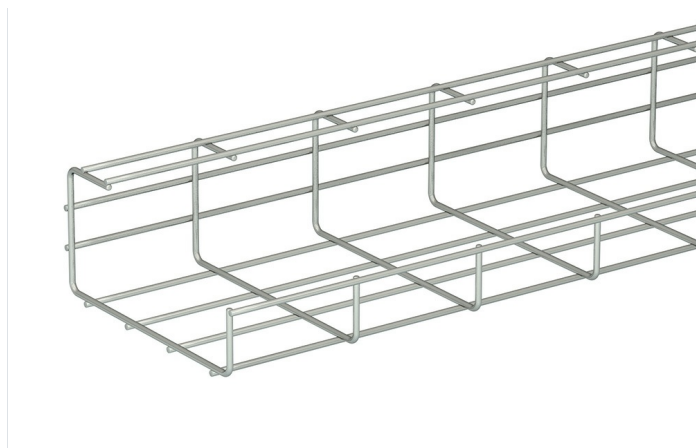

Description

Steel wire mesh tray with heights of 60 and 100 mm, surface protection and safety edge. Of 100 mm height, Width 60 mm, With EZ protection system. Used in industrial installations for the support and management of electric cables in false ceilings, confined spaces and on walls. The ease of installation is thanks to the Click quick connect system that requires no fixings for supports and accessories. It requires no additional support and is attached to the ceiling and walls by using just the Rejitech fixing. It has an open structure that allows the lateral introduction of the cables therefore reducing the installation time. Available in different sizes and Protection Systems. It is supplied in 3 m lengths. Manufacturing according to international standard IEC 61537.

Advantages

Cables are kept tidy and with maximum ventilation.

Direct fixing to the ceiling without additional support by using just the Rejitech Fastener.

Installation in false ceilings or confined spaces.

Quick installation by just one person.

It installs quickly without the need for joints or bends.

Applications

Suitable for the management and distribution of cables in electrical and/or telecommunications in industrial installations, Civil Works and Infrastructures, tunnels and inspection galleries. It is mainly used for installations in false ceilings due to its height of 60 mm allowing it to be accommodated in reduced spaces.

Solutions



OFFSHORE, PORTS ENERGY RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL RAILWAY APPLICATIONS FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC000853	kg/u	0,824
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,832	u	24
Protection System	EZ	Material	Steel with surface coating
Finish	EZ3, Electrogalvanised	Impact Strength (J)	20 J
Resistance Class	Class 3	Section (mm2)	1975
Flange (mm)	100	Working temperature range (°C)	-50 / 150 °C
Width (mm)	60	Fire resistance	A1 No combustible
Ø	4		
Length (m)	3		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

