
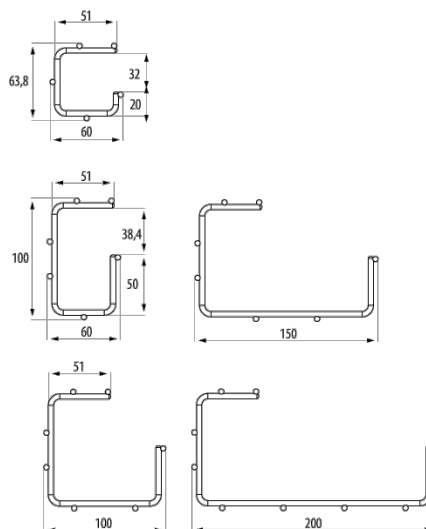


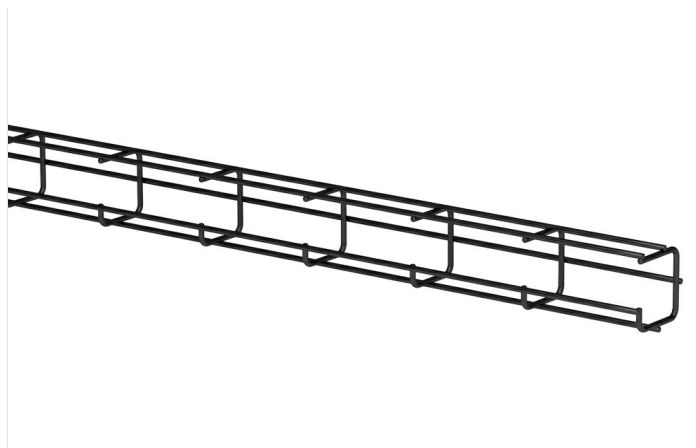

Description

Steel wire mesh tray with heights of 60 and 100 mm, surface protection and safety edge. Of 60 mm height, Width 60 mm, With BK8 protection system. Used in industrial installations for the support and management of electric cables in false ceilings, confined spaces and on walls. The ease of installation is thanks to the Click quick connect system that requires no fixings for supports and accessories. It requires no additional support and is attached to the ceiling and walls by using just the Rejitech fixing. It has an open structure that allows the lateral introduction of the cables therefore reducing the installation time. Available in different sizes and Protection Systems. It is supplied in 3 m lengths. Manufacturing according to international standard IEC 61537.

Advantages

Cables are kept tidy and with maximum ventilation.

Direct fixing to the ceiling without additional support by using just the Rejitech Fastener.

Installation in false ceilings or confined spaces.

Quick installation by just one person.

It installs quickly without the need for joints or bends.

Applications

Suitable for the management and distribution of cables in electrical and/or telecommunications in industrial installations, Civil Works and Infrastructures, tunnels and inspection galleries. It is mainly used for installations in false ceilings due to its height of 60 mm allowing it to be accommodated in reduced spaces.

Solutions



PHARMACEUTICAL INDUSTRY



OFFSHORE, PORTS



ENERGY



RENEWABLE ENERGIES



DATA CENTERS



SERVICE AND RETAIL



TUNNELS INFRASTRUCTURES



RAILWAY APPLICATIONS



FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC000853	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,672	
Protection System		BK8	
Finish		BLACK C8	
Resistance Class		Class 8	
Flange (mm)		60	
Width (mm)		60	
Ø		4	
Length (m)		3	
kg/u		0,666	
u		24	
Material		Steel with surface coating	
Impact Strength (J)		20 J	
Section (mm2)		676	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic