


## RLH1250 Halogen Free Conduit

1/2

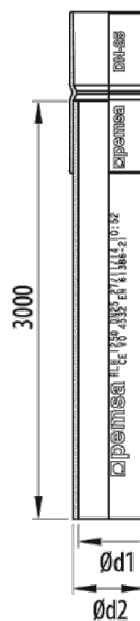

### Description

RLH rigid pipe for the protection of electrical cables in building applications. Made of halogen-free thermoplastic material (PC + ABS) with an IP44 protection rating, compression strength of 1250 N and impact resistance of 6 J. Available in grey (RAL 7035), in a wide variety of sizes.

### Advantages

Compression resistance grade 4, 1250 N. Suitable for surface installations.

Excellent performance against impact.

Quick assembly via plug-in connection between conduits and fittings.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

### Applications

Suitable for the protection of electrical cables in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.

### Solutions



EDIFICACIÓN. TERCIARIO














[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."






Main technical characteristics							
 Colour	Grey RAL 7035	 DN	NW16, NW20, NW25, NW32, NW40, NW50, NW63	 Polycarbonate + ABS	 4432	 1250 N	 6 J
 IP44	 -15 / 90 °C		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM EC001174			

Product data					
DN			Ref	kg/u	
NW16	12.8	16	13005116	0.086	57
NW20	16.6	20	13005120	0.117	57
NW25	21.6	25	13005125	0.149	57
NW32	28	32	13005132	0.226	30
NW40	35.2	40	13005140	0.339	30
NW50	45.2	50	13005150	0.431	15
NW63	58	63	13005163	0.572	15

 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic