


RLH1250 Halogen Free Conduit (Ref:

1/2

13005120)

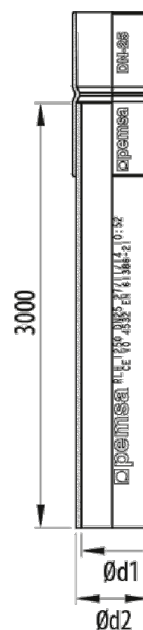

Description

RLH rigid conduit for the protection of electrical cables in building and tertiary applications. Made of halogen-free thermoplastic material (PC + ABS) according to EN 50642 / EN IEC 63355 standards, with an IP44 protection rating, compression strength of 1250 N and impact resistance of 6 J. Available in grey (RAL 7035), in various sizes. RLH Coupler included.

Advantages

Aenor N-mark certificate according to EN IEC 61386-21 (coupler not included in the certificate). CE conformity according to Directive 2014/35/EU.

Excellent performance against impact.

Halogen-free according to EN 50642 /EN IEC 63355

Quick assembly via plug-in connection between conduits and fittings.

Compression resistance grade 4, 1250 N. Suitable for surface installations.

Applications

Suitable for the protection of electrical cables in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.

Solutions



SERVICE AND RETAIL



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



RLH1250 Halogen Free Conduit (Ref: 13005120)

Product data			
ETIM 10		EC001174	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0	
Colour		Grey RAL 7035	
DN		NW20	
Ø d1 (mm)		16.6	
Ø d2 (mm)		20	
kg/u		0,117	
u		57	
Material		Polycarbonate + ABS	
Cod. IEC.61386		4432	
Compression strength (N)		1250 N	
Impact Strength (J)		6 J	
IP		IP44	
Working temperature range (°C)		-15 / 90 °C	
Fire resistance		Flame retardant	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

