


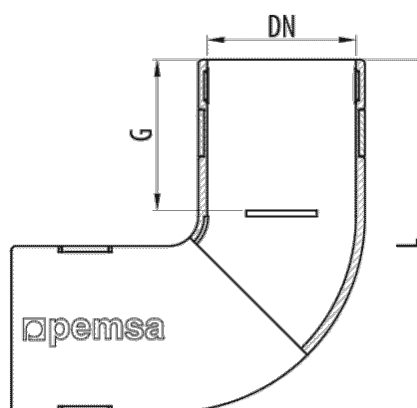

Description

90° elbow for RLH type rigid conduit for the protection of electrical cables in building applications. Manufactured in halogen-free thermoplastic material (PC + ABS) with an IP44 protection rating. Push fit connection system to the conduit. Available in grey (RAL 7035).

Advantages

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Available in various sizes: NW16, NW20, NW25 and NW32.

Quick assembly via plug-in connection for conduits and accessories. It allows opening to access and manipulate the cables.

For connection of RLH rigid and CLH corrugated conduits.

Applications

Suitable for rigid halogen free conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.

Solutions



Product data			
ETIM 10		EC000936	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Colour		Grey RAL 7035	
DN		NW25	
G (mm)		25.5	
L (mm)		60	
kg/u		0,013	
u		25	
Material		Polycarbonate + ABS	
IP		IP44	
Working temperature range (°C)		-15 / 90 °C	
Fire resistance		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic