
# RLH 90° Bend ( Ref: 55072025 )

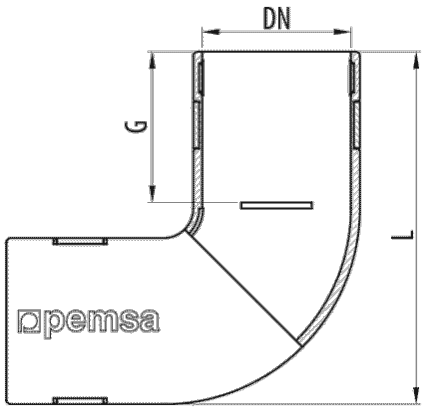


## Description

90° elbow for RLH type rigid conduit for the protection of electrical cables in building applications. Manufactured in halogen-free thermoplastic material (PC + ABS) with an IP44 protection rating. Push fit connection system to the conduit. Available in grey (RAL 7035).

## Advantages

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Available in various sizes: NW16, NW20, NW25 and NW32.

Quick assembly via plug-in connection for conduits and accessories. It allows opening to access and manipulate the cables.

For connection of RLH rigid and CLH corrugated conduits.

## Applications

Suitable for rigid halogen free conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# RLH 90° Bend ( Ref: 55072025 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC000936 | **u** | 25 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | | **Material** | Polycarbonate + ABS |
| **Colour** | Grey RAL 7035 | **IP** | IP44 |
| **DN** | NW25 | **Working temperature range (°C)** | -15 / 90 °C |
| **G (mm)** | 25.5 | **Fire resistance** | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA |
| **L (mm)** | 60 | | |
| **kg/u** | 0,013 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."