


90° RLH Bend

1/2

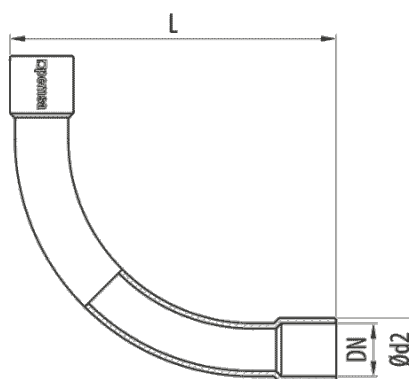

Description

90° bend for RLH rigid conduits for the protection of electrical cables in building applications. Manufactured in halogen-free thermoplastic material (PC + ABS) with an IP44 protection rating. Push fit connection system to the conduit. Available in grey (RAL 7035).

Advantages

Available in various sizes: NW16, NW20, NW25 and NW32.

For connection of RLH rigid and CLH corrugated conduits.

Quick assembly via plug-in connection between conduits and fittings.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

Applications

Suitable for rigid halogen free conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



90° RLH Bend

2/2

Main technical characteristics

COLOUR Grey RAL 7035	DN NW16, NW20, NW25, NW32	Ⓜ Polypropylene	Ⓢ IP44	🔥 -15 / 90 °C
🚫 LIBRE DE HALÓGENOS, NO PROPAGADOR DE LA LLAMA		ETIM 10 EC000936		

Product data

DN	Ⓢ	L _{mm}	REF	kg/u	Ⓢ
NW16	19	70	55016016	0,009	25
NW20	23	90	55016020	0,013	25
NW25	29	120	55016025	0,020	25
NW32	36	150	55016032	0,045	10

🔒 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

Ⓜ Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

