RLH Conduit Accessories

Flexible Bend FRLH

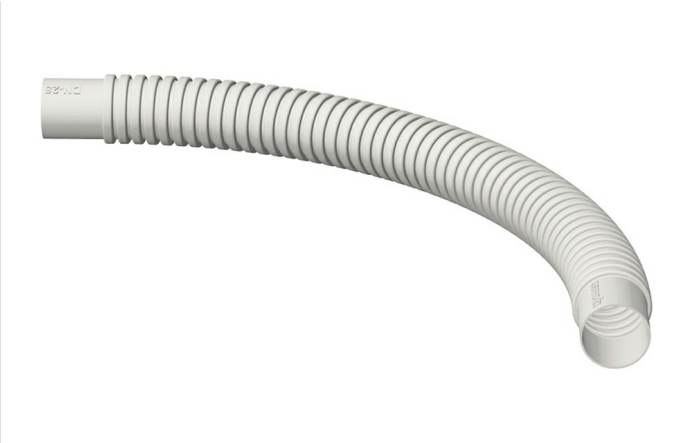

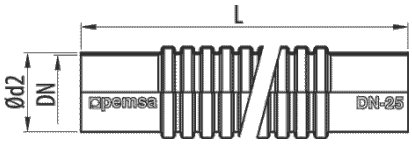

Description

Flexible bend for RLH rigid conduits for the protection of electrical cables in building applications. Manufactured in polypropylene, halogen free with an IP44 protection index. Push fit connection system to the conduit. Available in grey (RAL 7035).

Advantages

Available in various sizes: NW16, NW20, NW25 and NW32.

For connection of RLH rigid and CLH corrugated conduits.

Quick assembly via plug-in connection between conduits and fittings.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

Applications

Suitable for rigid halogen free conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Flexible Bend FRLH

Main technical characteristics

Colour Grey RAL 7035

DN NW16, NW20, NW25, NW32

Polypropylene

IP44

-15 / 90 °C

LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

ETIM 10 EC000936

Product data

DN	Ø	L (mm)	REF	kg/u	
NW16	17	275	55090016	0,016	20
NW20	21.3	275	55090020	0,022	20
NW25	26.7	390	55090025	0,046	10
NW32	33.4	390	55090032	0,055	10

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."