
RLH Tee



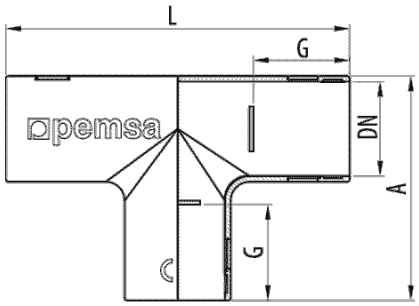

Description

Tee for RLH rigid conduit for the protection of electrical cables in building applications. Manufactured in halogen-free thermoplastic material (PC + ABS) with an IP44 protection rating. Push fit connection system to the conduit. Available in grey (RAL 7035).

Advantages

Available in various sizes: NW16, NW20, NW25 and NW32.

For connection of RLH rigid and CLH corrugated conduits.

Quick assembly via plug-in connection for conduits and accessories. It allows opening to access and manipulate the cables.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

Applications

Suitable for rigid halogen free conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

RLH Tee

Main technical characteristics

Colour Grey RAL 7035

DN NW16, NW20, NW25, NW32

Polycarbonate + ABS

IP44

-15 / 90 °C

LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

ETIM 10
EC002922

Product data

DN		L(mm)	A(mm)	Ref	kg/u	
NW16	16.5	64	42	55082016	0,009	25
NW20	20.5	76	50	55082020	0,013	25
NW25	25.5	91	60	55082025	0,020	25
NW32	30.5	108	72	55082032	0,029	15

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."