


RLH Tee

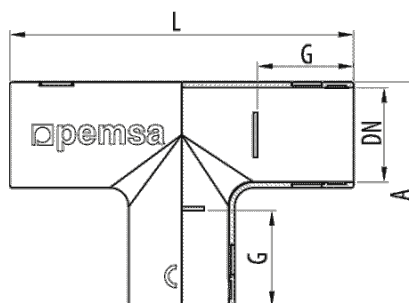

Description

Tee for RLH rigid conduit for the protection of electrical cables in building applications. Manufactured in halogen-free thermoplastic material (PC + ABS) with an IP44 protection rating. Push fit connection system to the conduit. Available in grey (RAL 7035).

Advantages

Available in various sizes: NW16, NW20, NW25 and NW32.

For connection of RLH rigid and CLH corrugated conduits.

Quick assembly via plug-in connection for conduits and accessories. It allows opening to access and manipulate the cables.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

Applications

Suitable for rigid halogen free conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.



Solutions



Main technical characteristics

Colour	Grey RAL 7035	DN	NW16, NW20, NW25, NW32		M	Polycarbonate + ABS		IP	IP44		°C	-15 / 90
	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA				ETIM EC002922							

Product data

DN		L _(mm)	A _(mm)	Ref	kg/u	
NW16	16.5	64	42	55082016	0.009	25
NW20	20.5	76	50	55082020	0.013	25
NW25	25.5	91	60	55082025	0.020	25
NW32	30.5	108	72	55082032	0.029	15

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

