


Coupler Boxes RLH IP65

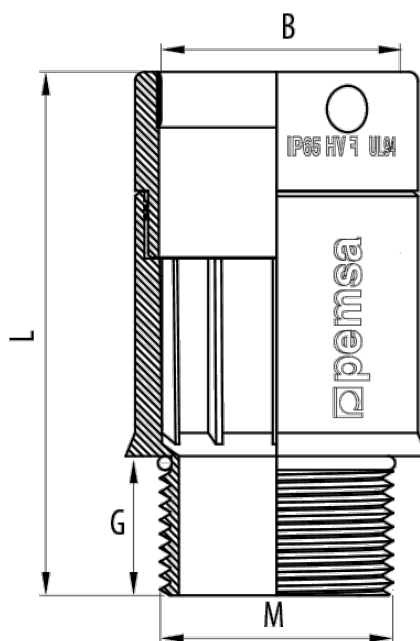

Description

Threaded connector for the coupling and connection of RLH rigid and CLH flexible conduits to termination or branch boxes for the protection of electrical cables. Manufactured in thermoplastic (PC + ABS), halogen free with an IP65 protection rating. Plug-in connection system and threaded on the other end. Available in grey (RAL 7035).

Advantages

For connection of RLH rigid and CLH corrugated conduits to boxes.

Protection index EN 60529: IP65.

Quick assembly via plug-in connection between conduits and fittings.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

Applications

Suitable for rigid and corrugated halogen free conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Coupler Boxes RLH IP65

Main technical characteristics

Colour Grey RAL 7035	DN NW16, NW20, NW25, NW32, NW40, NW50, NW63	⌘ M16, M20, M25, M32, M40, M50, M63	⌘ 15
Ⓜ Polycarbonate + ABS	Ⓜ IP65	⌘ -15 / 90 °C	⌘ LIBRE DE HALÓGENOS, NO PROPAGADOR DE LA LLAMA
			ETIM 10 EC000939

Product data

DN	⌘	L _{mm}	Ref	kg/u	Ⓜ
NW16	M16	47.5	55044016	0,007	19
NW20	M20	51.5	55044020	0,009	19
NW25	M25	56.5	55044025	0,012	19
NW32	M32	61.5	55044032	0,015	10
NW40	M40	63.5	55044040	0,019	10
NW50	M50	73.5	55044050	0,027	5
NW63	M63	81.5	55044063	0,036	5

Ⓜ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

