


## Coupler Boxes RLH IP65 ( Ref: 55044016 )

1/2

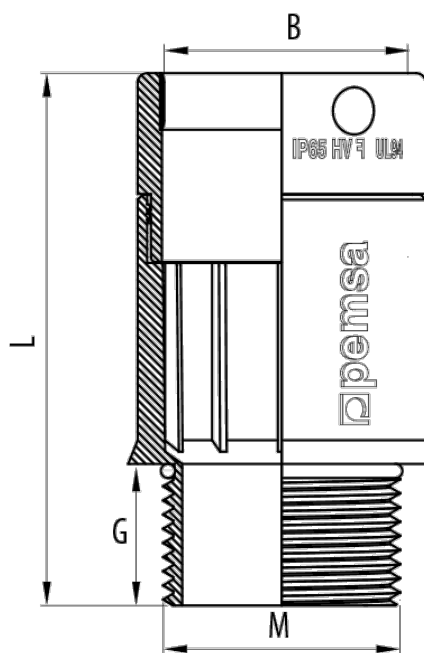

### Description

Threaded connector for the coupling and connection of RLH rigid and CLH flexible conduits to termination or branch boxes for the protection of electrical cables. Manufactured in thermoplastic (PC + ABS), halogen free with an IP65 protection rating. Plug-in connection system and threaded on the other end. Available in grey (RAL 7035).

### Advantages

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Protection index EN 60529: IP65.

Quick assembly via plug-in connection between conduits and fittings.

For connection of RLH rigid and CLH corrugated conduits to boxes.

### Applications

Suitable for rigid and corrugated halogen free conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
Colour	Grey RAL 7035	u	19
DN	NW16	Material	Polycarbonate + ABS
M/PG	M16	IP	IP65
G (mm)	15	Working temperature range (°C)	-15 / 90 °C
L (mm)	47.5	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
kg/u	0.007		

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic