


Coupler Boxes RLH IP65 (Ref: 55044050)

1/2

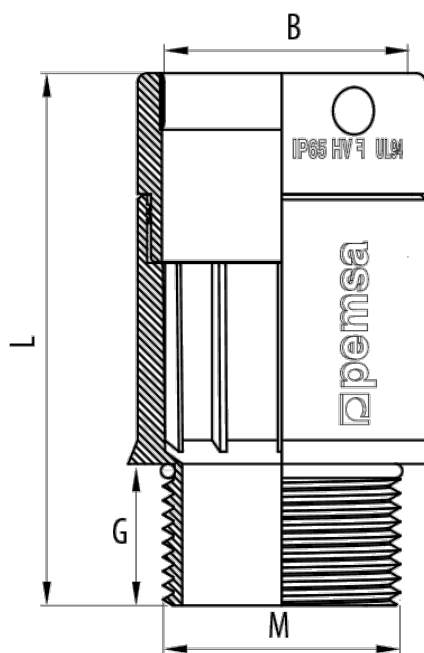

Description

Threaded connector for the coupling and connection of RLH rigid and CLH flexible conduits to termination or branch boxes for the protection of electrical cables. Manufactured in thermoplastic (PC + ABS), halogen free with an IP65 protection rating. Plug-in connection system and threaded on the other end. Available in grey (RAL 7035).

Advantages

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Protection index EN 60529: IP65.

Quick assembly via plug-in connection between conduits and fittings.

For connection of RLH rigid and CLH corrugated conduits to boxes.

Applications

Suitable for rigid and corrugated halogen free conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Coupler Boxes RLH IP65 (Ref: 55044050)

2/2

Product data

ETIM 10	EC000939	u	5
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Polycarbonate + ABS
Colour	Grey RAL 7035	IP	IP65
DN	NW50	Working temperature range (°C)	-15 / 90 °C
M/PG	M50	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
G (mm)	15		
L (mm)	73.5		
kg/u	0,027		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

