


## Conduit RPVC750

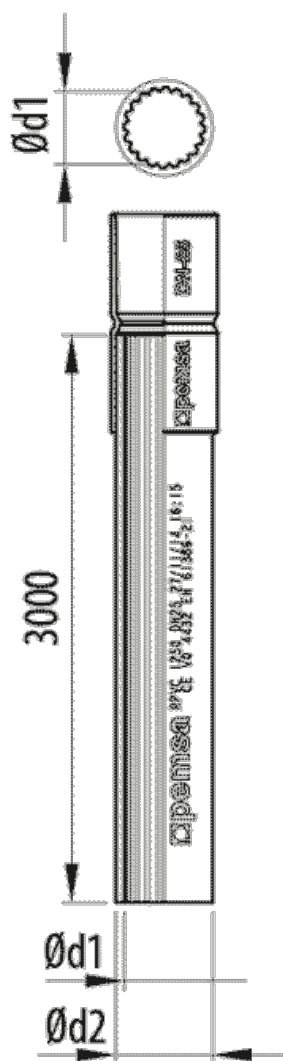

### Description

RPVC rigid conduit for the protection of electrical cables in building applications. Made of plastic material (PVC) with an IP44 protection index, compression resistance of 750 N and impact resistance of 6 J. Available in grey (RAL 7035), in a wide variety of sizes.

### Advantages

It is produced in 3 m lengths for greater convenience of transport and handling.

No flame propagation.

Quick assembly via plug-in connection between conduits and fittings.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Speed system that allows the fast introduction and manipulation of cables due to the internal grooves in the conduit.

### Applications

Suitable for the protection of electrical wiring in building applications, tertiary sector and industry.

### Solutions



Main technical characteristics

COLOR	Grey RAL 7035	DN	NW16, NW20, NW25, NW32, NW40, NW50, NW63	M	PVC	Cod. IEC 61386	3332	750 N	2 J	IP44
			ETIM							
°C	-15 / 90 °C	Flame retardant	EC001174							

Product data

DN			Ref	kg/u	
NW16	13.3	16	13060116	0.101	57
NW20	17.2	20	13060120	0.155	57
NW25	22.2	25	13060125	0.198	57
NW32	29	32	13060132	0.273	30
NW40	36.6	40	13060140	0.381	30
NW50	46.4	50	13060150	0.529	15
NW63	58.6	63	13060163	0.762	15

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic