
# Conduit RPVC750

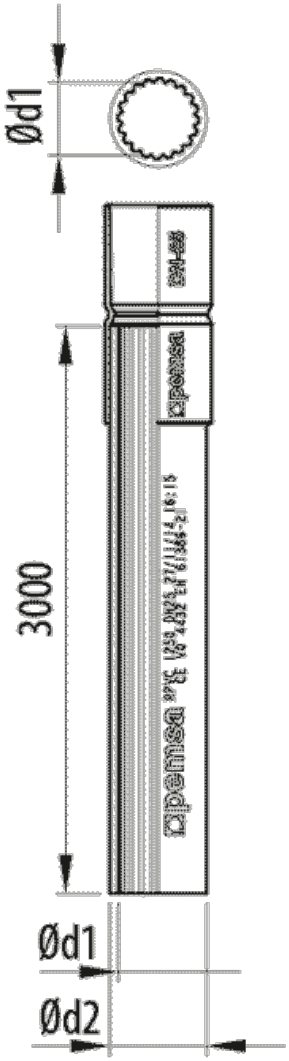


## Description

RPVC rigid conduit for the protection of electrical cables in building applications. Made of plastic material (PVC) with an IP44 protection index, compression resistance of 750 N and impact stregth of 2 J. Available in grey (RAL 7035), in a wide variety of sizes.

## Advantages

It is produced in 3 m lengths for greater convenience of transport and handling.

No flame propagation.

Quick assembly via plug-in connection between conduits and fittings.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Speed system that allows the fast introduction and manipulation of cables due to the internal grooves in the conduit.

## Applications

Suitable for the protection of electrical wiring in building applications, tertiary sector and industry.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Conduit RPVC750

## Main technical characteristics

Colour Grey RAL 7035 | DN NW16, NW20, NW25, NW32, NW40, NW50, NW63 | PVC | Conf IEC 61386 3321 | 750 N | 2 J | IP44 | -5 / 60 °C | Flame retardant | ETIM 10 EC001174

## Product data

| DN | Od1 | Od2 | Ref | kg/u | u |
|---|---|---|---|---|---|
| NW16 | 13.3 | 16 | 13060116 | 0,101 | 57 |
| NW20 | 17.2 | 20 | 13060120 | 0,155 | 57 |
| NW25 | 22.2 | 25 | 13060125 | 0,198 | 57 |
| NW32 | 29 | 32 | 13060132 | 0,273 | 30 |
| NW40 | 36.6 | 40 | 13060140 | 0,381 | 30 |
| NW50 | 46.4 | 50 | 13060150 | 0,529 | 15 |
| NW63 | 58.6 | 63 | 13060163 | 0,762 | 15 |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."