


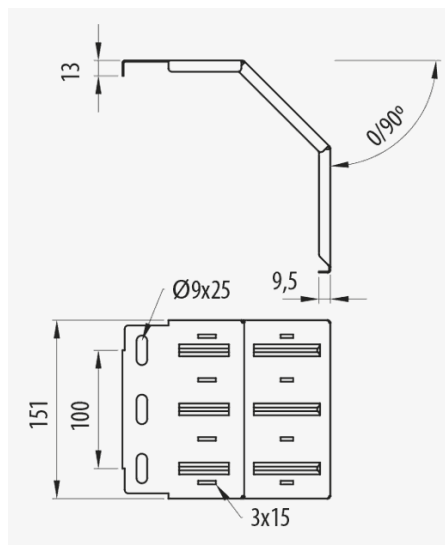

Description

Metal accessory that facilitates the exit of cables, providing the cable with an optimal radius of curvature. It is directly connected to the Megaband® ladder. Made of steel, with GC Protection System.

Advantages

Guarantees the correct curvature of the cable.

It is connected directly to the rung of the ladder, by means of the Megaband joint kit or M8 nuts and bolts.

Definitive solution: perfect joint.

Applications

Suitable to facilitate the exit of cables, ensuring the cable has an optimum radius of curvature. It connects directly to the Megaband® rung.

Solutions



Product data

ETIM 10	EC000858	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,915	Material	Steel with surface coating
Protection System	GC	Working temperature range (°C)	-50 / 150 °C
Finish	HDG, Hot Dip Galvanised	Fire resistance	A1 No combustible
Resistance Class	Class 6		
kg/u	0,353		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



Product applications

