
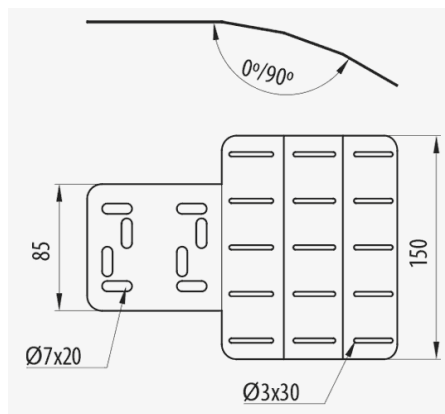


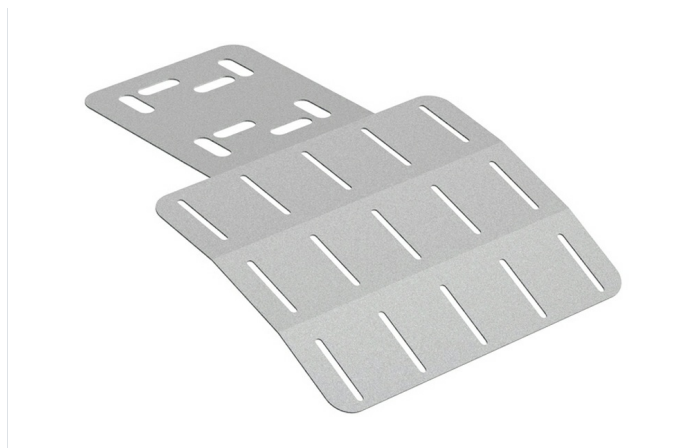

Description

Accessory for the outlet of cables, adjustable angle for the protection of data and power cables in Rejiband® trays. Made of steel, in GC and PG Protection Systems.

Advantages

Mounting by means of a Rejiband M6 fixing.

It allows for the angle to be adjusted between 0 and 90°.

Protects the outlet of power and data cables.

Applications

Suitable for the protection of the outlet of power and data cables in the Rejiband® wire mesh tray installation.

Solutions



DATA CENTERS



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC000858	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,486	
Protection System		PG	
Finish		PG3, Pregalvanised	
Resistance Class		Class 3	
kg/u		0,150	
u		1	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System

CU

- Copper electroplated

PG

- Pregalvanised

EZ

- Electrogalvanised

BC

- Electrogalvanised Bichromate

BK8

- High Resistance Coating

GC

- Hot Dip Galvanising

INOX

- Stainless Steel

PT

- Polyester Paint

AL

- Aluminum

LN

- Brass or Nickel-plated brass

Insulating materials

PC+ABS

- Halogen Free Polycarbonate + ABS

PVC

- Polyvinyl Chloride

PP

- Halogen Free Polypropylene

PA6

- Halogen Free Polyamide 6

PA12

- Halogen Free Polyamide 12

PU

- Polyurethane

PE

- Polyethylene

NBR

- NBR rubber

PET

- Thermoplastic Polyester

TPV

- Thermoplastic

Product applications

