
Conduit Gland Bracket



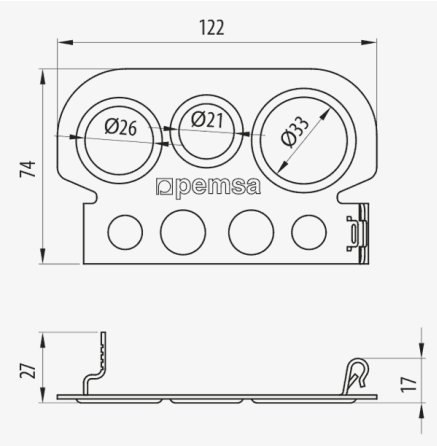

Description

Conduit outlet is a Rejiband® accessory used to protect the wiring output to rigid or flexible conduits. It allows connection of fittings in types PG13, PG16, PG21, M20 and M25. It is installed using the quick-fit Click system without the need of screws and can be placed in the flange or in the base of the tray. Suitable for all sizes of Rejiband® trays and available in various Protection Systems.

Advantages

Fixing by quick mount click system.

Quick installation without the need for screws or fastenings.

Protects the cable outlet.

Can be used with TFA, ECOFLEX, TM-PVC + Pemsa RGp.

It accepts fittings in sizes of: PG13, PG16, PG21, M20 and M25.

Applications

Allows the connection of fittings or glands and allows the output of electrical or telecommunications wiring from rigid or flexible conduits.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Conduit Gland Bracket

Main technical characteristics

DN NW16, NW20, NW25, NW32 | 10 | Steel with surface coating | -50 / 150 °C | A1 No combustible | ETIM 10 EC002410

Product data

Ⓢ	IEC 61537	DN	REF	kg/u
EZ	Class 3	NW16	67010040	0,082
EZ	Class 3	NW20	67010240	0,101
EZ	Class 3	NW25	67010340	0,096
EZ	Class 3	NW32	67010440	0,089
BK8	Class 8	NW16	67080040	0,083
BK8	Class 8	NW20	67080240	0,102
BK8	Class 8	NW25	67080340	0,097
BK8	Class 8	NW32	67080440	0,090

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber


PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Conduit Gland Bracket

Product applications

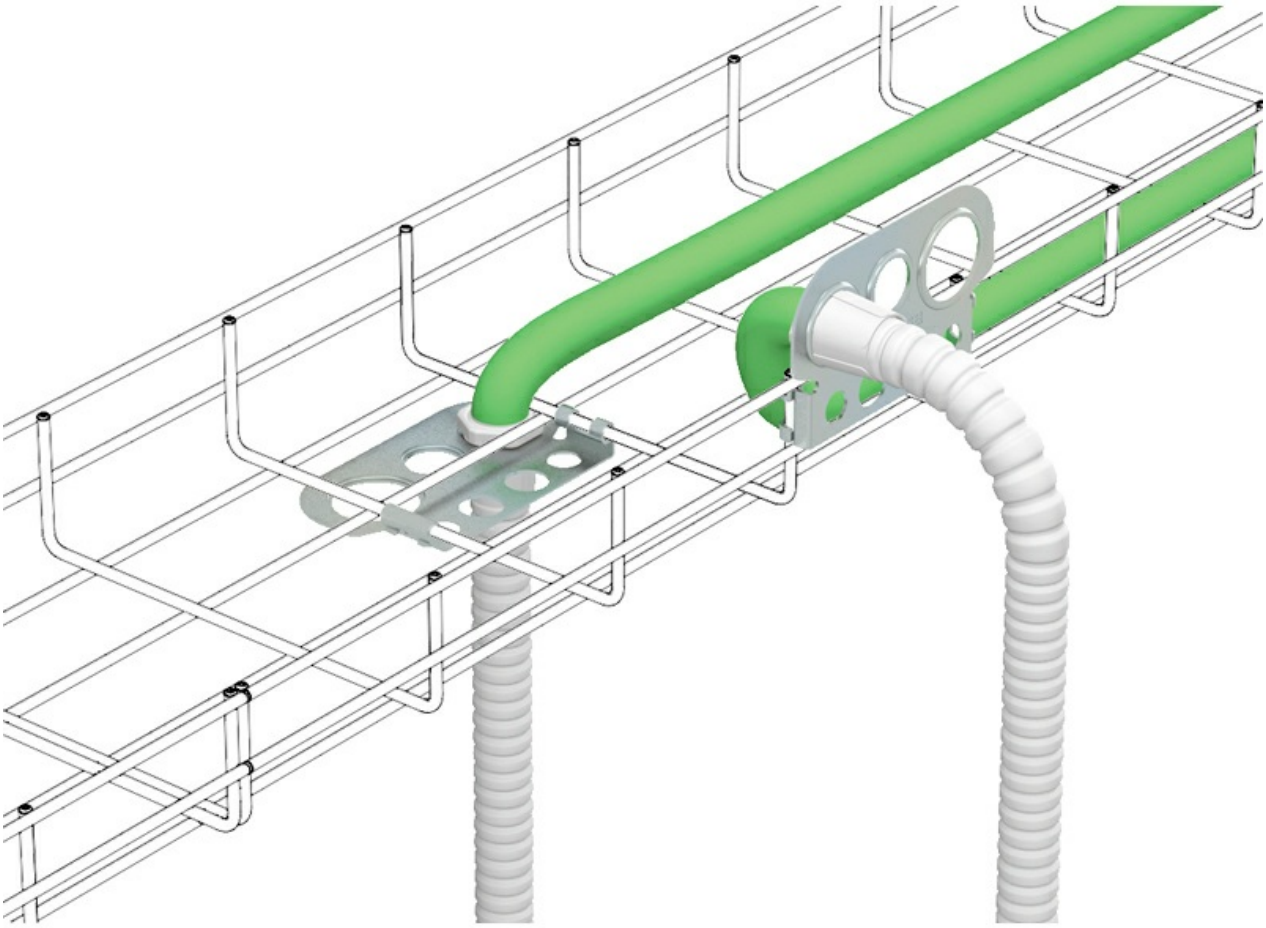

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."