


Conduit Gland Bracket (Ref: 67010040)

1/3

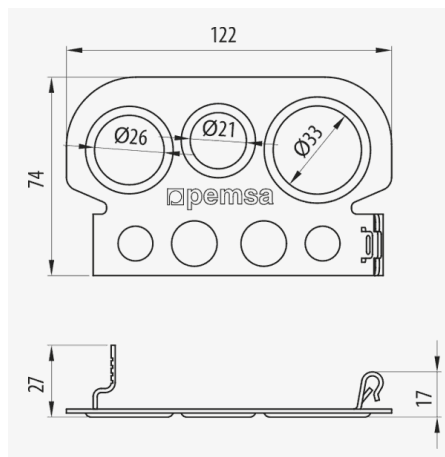

Description

Conduit outlet is a Rejiband® accessory used to protect the wiring output to rigid or flexible conduits. Maximum diameter DN16 mm, With EZ protection system. It allows connection of fittings in types PG13, PG16, PG21, M20 and M25. It is installed using the quick-fit Click system without the need of screws and can be placed in the flange or in the base of the tray. Suitable for all sizes of Rejiband® trays and available in various Protection Systems.

Advantages

It accepts fittings in sizes of: PG13, PG16, PG21, M20 and M25.

Fixing by quick mount click system.

Protects the cable outlet.

Quick installation without the need for screws or fastenings.

Can be used with TFA, ECOFLEX, TM-PVC + Pemsa RGp.

Applications

Allows the connection of fittings or glands and allows the output of electrical or telecommunications wiring from rigid or flexible conduits.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
ETIM 10		EC002410	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	
Protection System		Steel with surface coating	
Finish		Working temperature range (°C)	
Resistance Class		-50 / 150 °C	
DN		Fire resistance	
kg/u		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Conduit Gland Bracket (Ref: 67010040)

3/3

Product applications

