# 3C Strut Cantilever ( Ref: 82003162 )

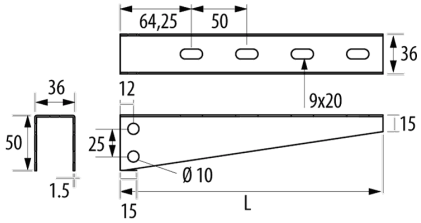


## Description

Base Support for 3C Strut with 3 sides that connect in a variety of ways to the perforations on the three sides of the Channels. Width 300 mm, With GC protection system. Facilitates the fixixing and base support of the 3C Strut. Made of steel, available in various protection systems.

## Advantages

It acts as a support as a horizontal support in cable tray installations.

Available in PG and GC Protection Systems

Available in lengths 100, 150, 200, 300 y 400 mm.

CE conformity in accordance to the low voltage directive 2014 /35 /UE and the international product standard IEC 61537

Quick installation system. Thanks to the 3 side perforations allow a fast connection and screwing on the 3C Strut Cantilever using M8x65 hexagonal screw.

## Applications

Support for Cable Trays (rejiband®, pemsaband®, megaband®, among others) in ceiling installations in tunnels, service galleries, buildings or installations in industrial environments.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# 3C Strut Cantilever ( Ref: 82003162 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC001003 | **u** | 2 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | | **Material** | Steel with surface coating |
| **Protection System** | GC | **Working temperature range (°C)** | -50 / 150 ºC |
| **Finish** | HDG, Hot Dip Galvanised | **Fire resistance** | A1 No combustible |
| **Resistance Class** | Class 6 | | |
| **Width (mm)** | 300 | | |
| **kg/u** | 0,412 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."