
3C Strut System

# 3C Mounting Plate ( Ref: 82003172 )



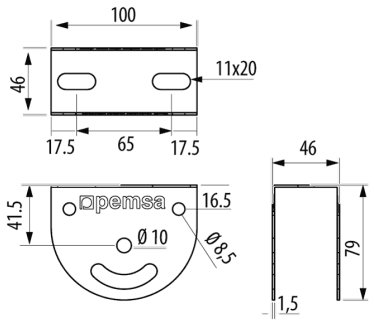


## Description

Fixing support for the connection of the 3C Strut to the ceiling, allowing them to have a variable angle that can adapt to tunnel vaults or inclined ceilings. Made from steel, available in various protection systems. With PG protection system

## Advantages

Available in PG and GC Protection Systems

CE conformity in accordance to the low voltage directive 2014 /35 /UE and the international product standard IEC 61537

Fixing piece by means of M8x65 screws for the installations of cable trays made up of 3-sided channels.

Its design allows the creation of variable angles, adapting to arches of tunnels, galleries, and sloping walls.

## Applications

Support for Cable Trays (Rejiband®, Pemsaband®, Megaband®, among others) in ceiling installations in tunnels, service galleries, buildings or installations in industrial environments.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# 3C Mounting Plate ( Ref: 82003172 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC000896 | **u** | 2 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | | **Material** | Steel with surface coating |
| **Protection System** | PG | **Working temperature range (°C)** | -50 / 150 °C |
| **Finish** | PG3, Pregalvanised | **Fire resistance** | A1 No combustible |
| **Resistance Class** | Class 3 | | |
| **kg/u** | 0,188 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."