
3C Strut System

3C Mounting Plate (Ref: 82003175)



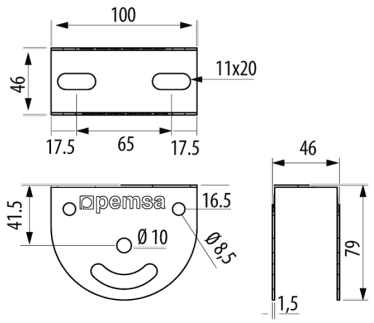

Description

Fixing support for the connection of the 3C Strut to the ceiling, allowing them to have a variable angle that can adapt to tunnel vaults or inclined ceilings. Made from steel, available in various protection systems. With GC protection system

Advantages

Available in PG and GC Protection Systems

CE conformity in accordance to the low voltage directive 2014 /35 /UE and the international product standard IEC 61537

Fixing piece by means of M8x65 screws for the installations of cable trays made up of 3-sided channels.

Its design allows the creation of variable angles, adapting to arches of tunnels, galleries, and sloping walls.

Applications

Support for Cable Trays (rejiband®, pemsaband®, megaband®, among others) in ceiling installations in tunnels, service galleries, buildings or installations in industrial environments.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

3C Mounting Plate (Ref: 82003175)

Product data

ETIM 10	EC000896	**u**	2
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**Material**	Steel with surface coating
Protection System	GC	**Working temperature range (°C)**	-50 / 150 ºC
Finish	HDG, Hot Dip Galvanised	**Fire resistance**	A1 No combustible
Resistance Class	Class 6		
kg/u	0,209		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."