


## Light Duty Wall Support ( Ref: 62036021 )

1/10

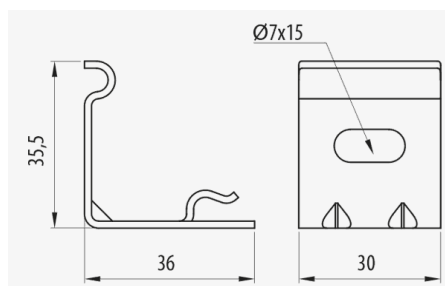

### Description

Light duty wall support for the wall installation of Rejiband® wire mesh tray with a height of 60 mm and widths of 60, 100 and 150 mm. With GC protection system. Quick assembly thanks to the Click system of connection without the need of screws. Permissible working load up to 15 kg. Available in various Protection Systems.

### Advantages

Designed for light loads and trays of small sizes (widths 60, 100 & 150 mm).

Available in various protection systems: EZ, BC, GC or high resistance BK8, depending on the type of application.

It allows the introduction of cables into the tray from the side.

Fixing by quick mount click system.

No screws or other fasteners required.

### Applications

Suitable for supporting light loads on the wall for the management of cables in small sizes of Rejiband® wire mesh trays. Used for electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data					
Protection System		GC	Material		Steel with surface coating
Finish		Zinc Nickel	SWL (kg)		15
Resistance Class		Class 8	Working temperature range (°C)		-50 / 150 °C
kg/u		0.026	Fire resistance		A1 No combustible
u		25			

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint


AL - Aluminum


LN - Brass or Nickel-plated brass


Insulating materials


- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

## Product applications

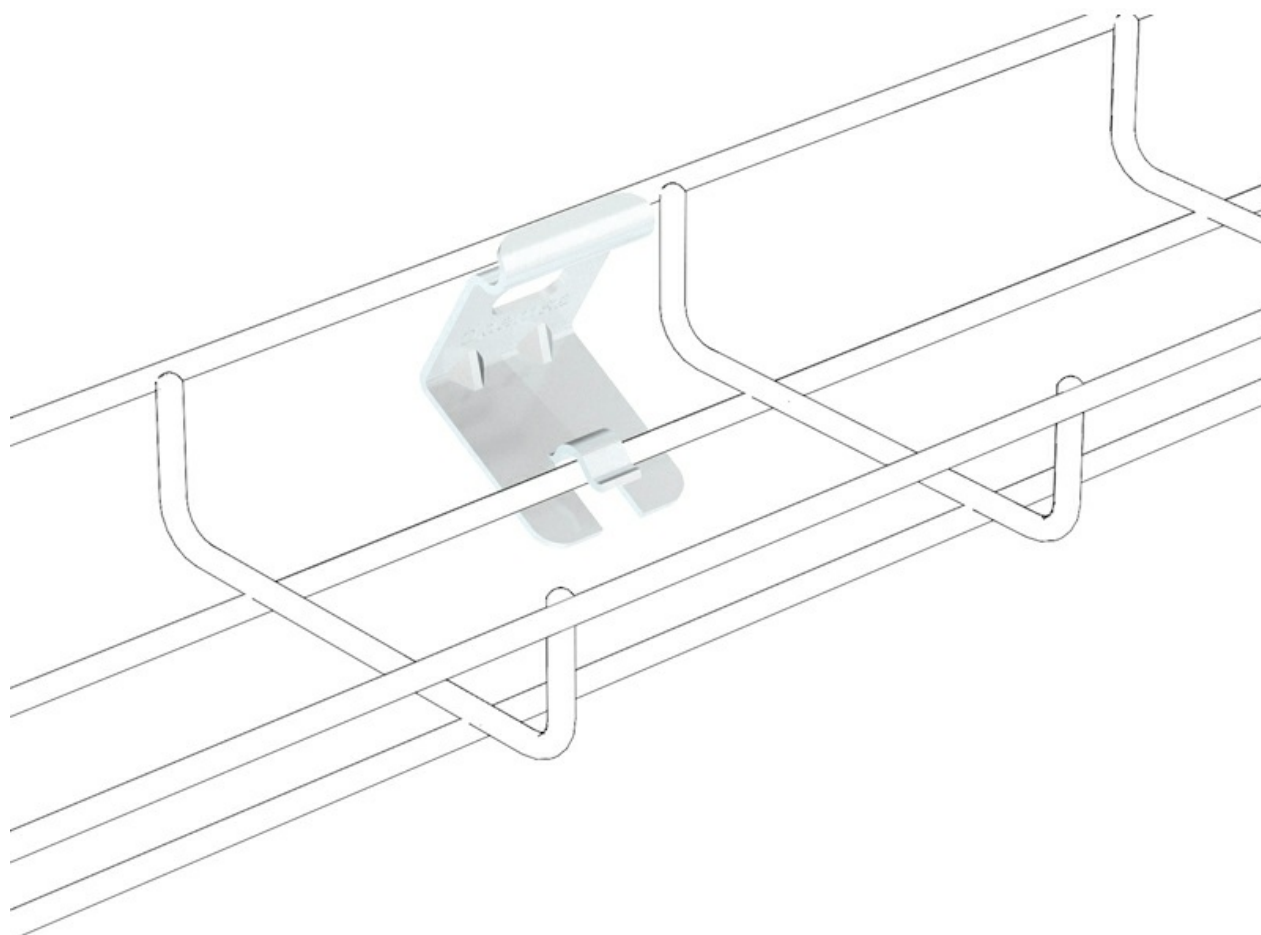


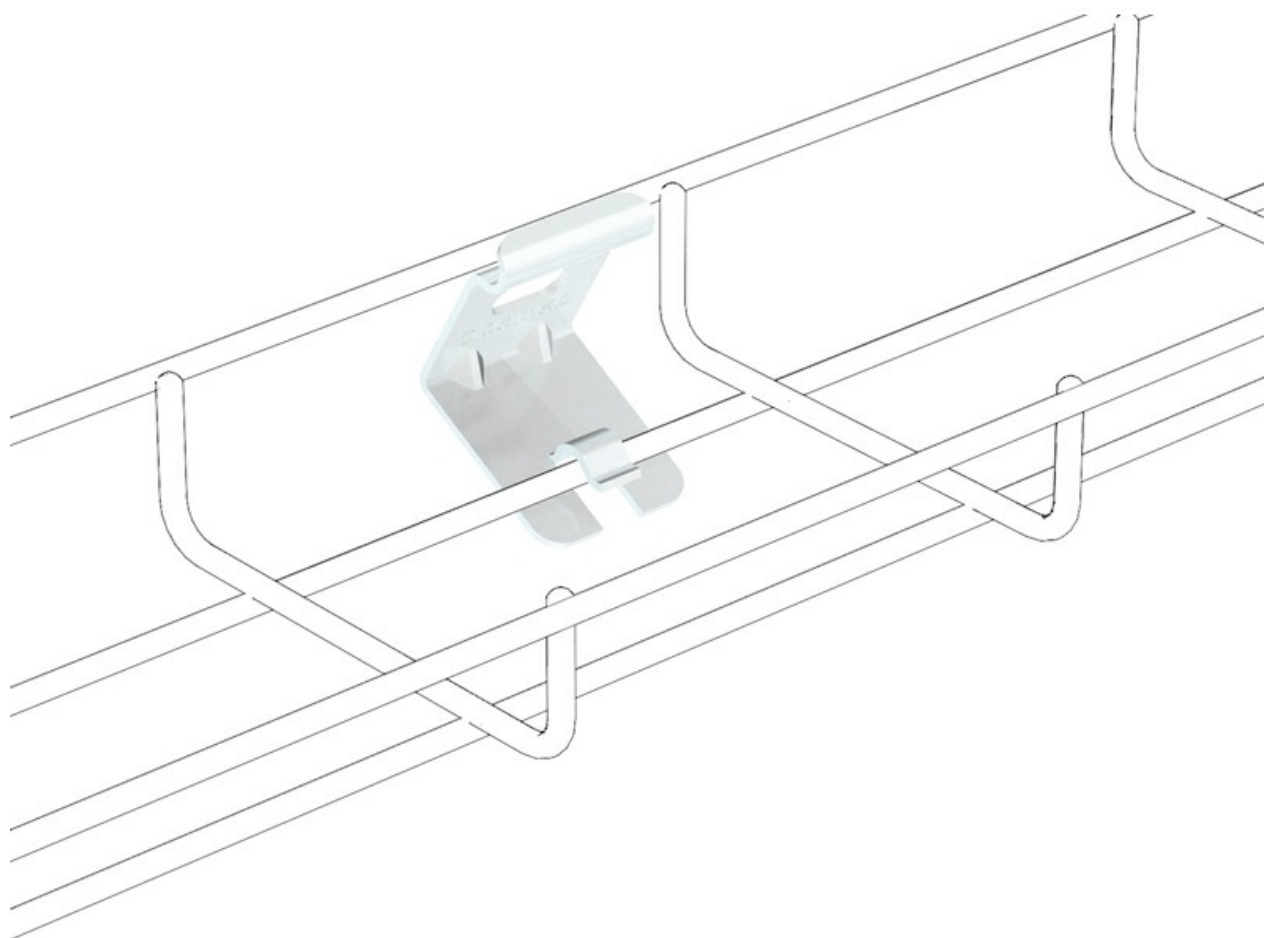

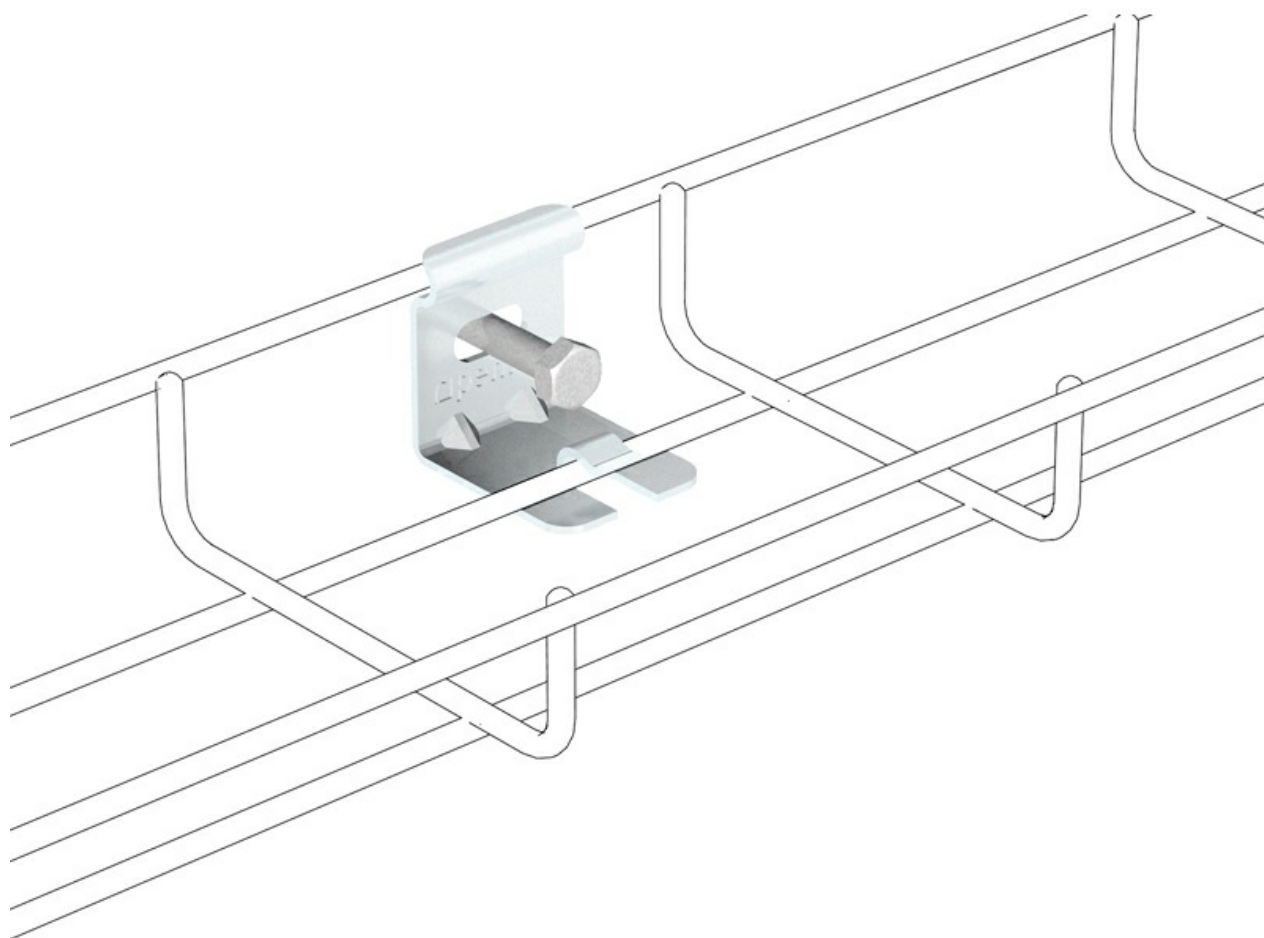

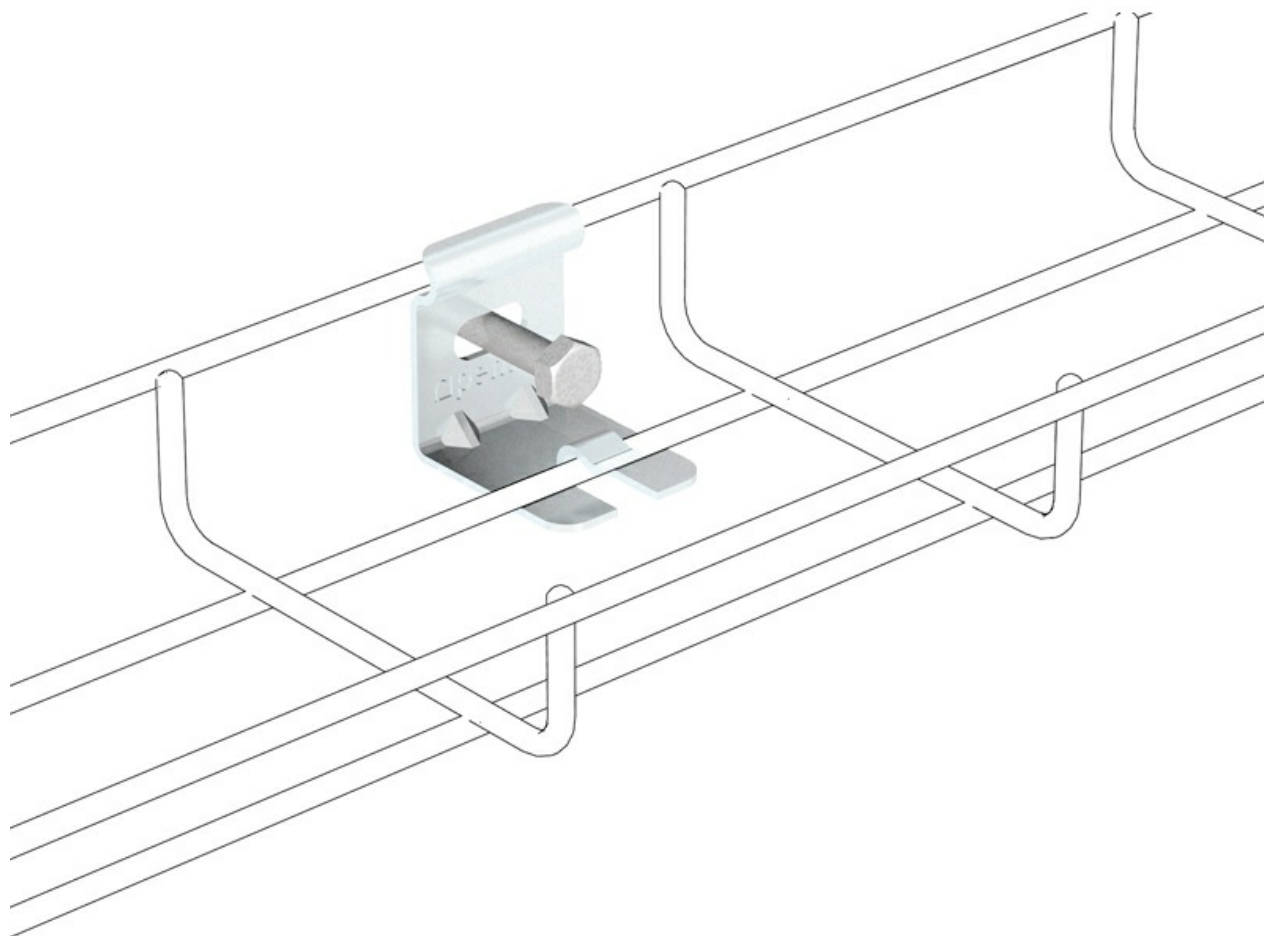


**Light Duty Wall Support** ( Ref: 62036021 )

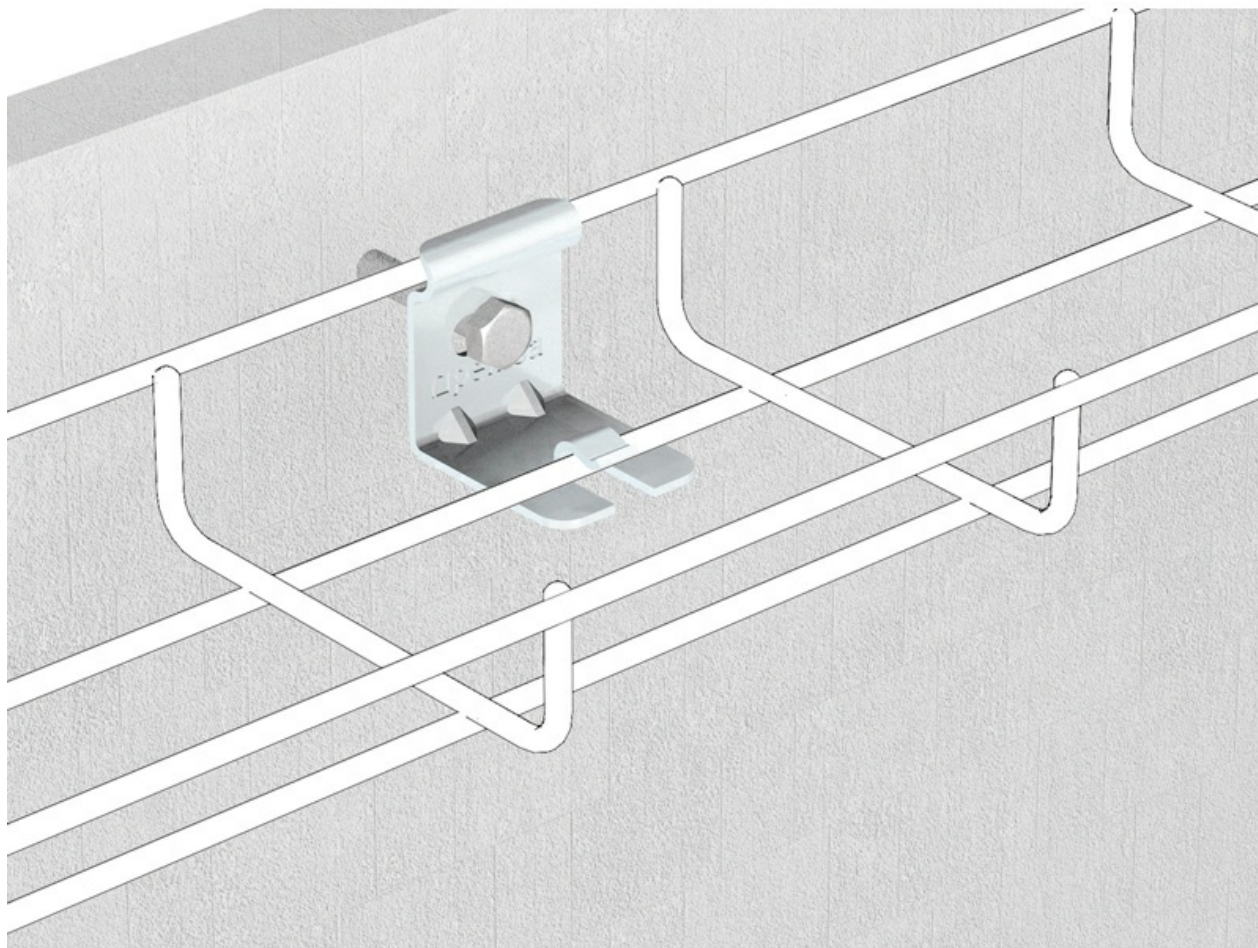



**Light Duty Wall Support** ( Ref: 62036021 )

8/10

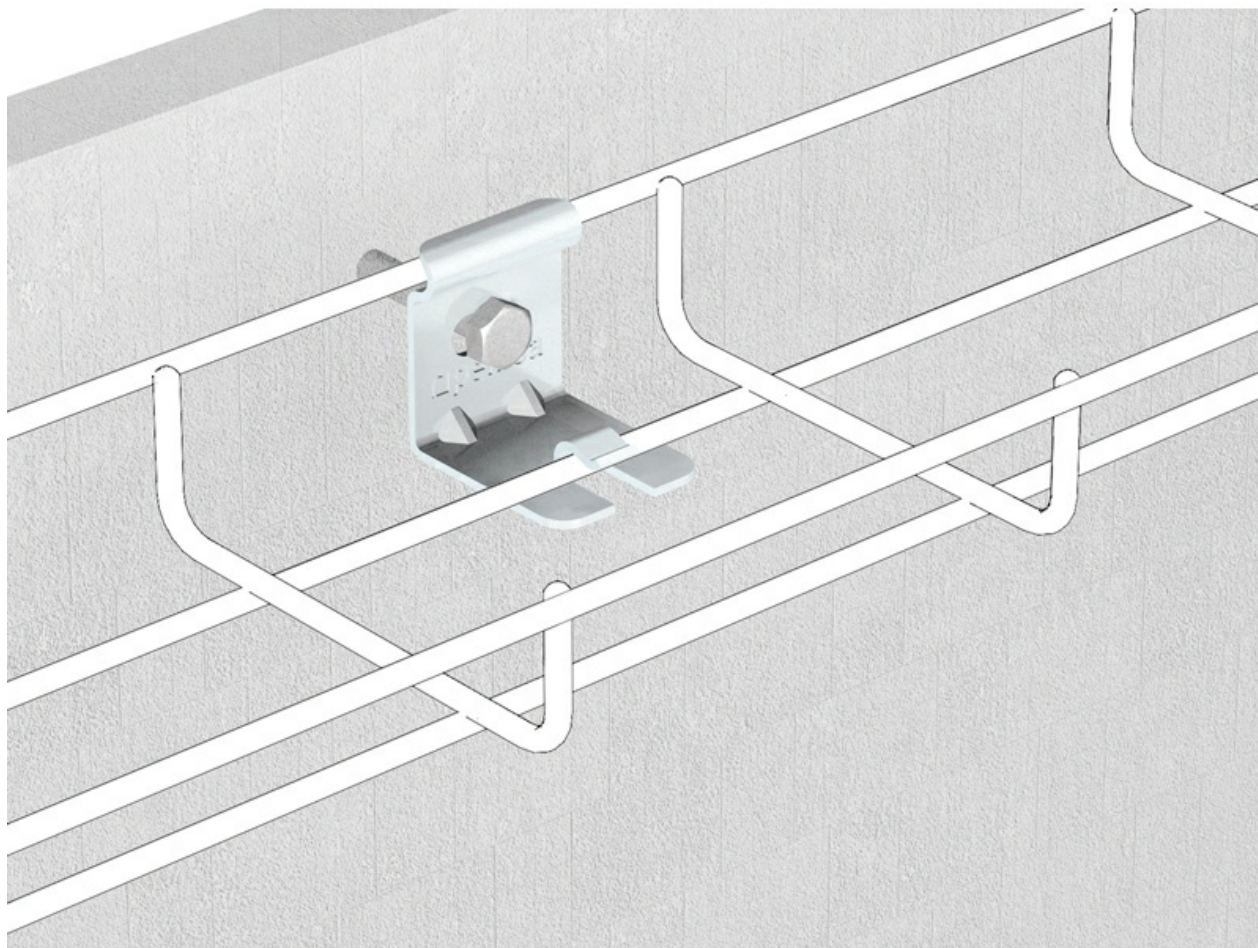



**Light Duty Wall Support** ( Ref: 62036021 )



**Light Duty Wall Support** ( Ref: 62036021 )

