

### Description

Support in steel used for the ceiling installation of Rejiband® wire mesh tray with a height of 35 and 60 mm and widths of 60, 100 and 150 mm. With BC protection system. Quick assembly thanks to the Click system of connection without the need of screws. Permissible working load up to 10 kg. Available in various Protection Systems.

### Advantages

Designed for light loads and trays of small sizes (widths 60, 100 & 150 mm).

Available in various protection systems: EZ, BC, GC or high resistance BK8, depending on the type of application.

It allows the introduction of cables into the tray from the side.

Fixing by quick mount click system.

No screws or other fasteners required.

### Applications

Suitable for supporting light loads to the ceiling in cable routing in small size Rejiband® trays for electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector.

### Solutions



Product data					
Protection System		BC	Material		Steel with surface coating
Finish		BYCRO	SWL (kg)		10
Resistance Class		Class 5	Working temperature range (°C)		-50 / 150 °C
kg/u		0.132	Fire resistance		A1 No combustible
u		10			

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint


AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Product applications

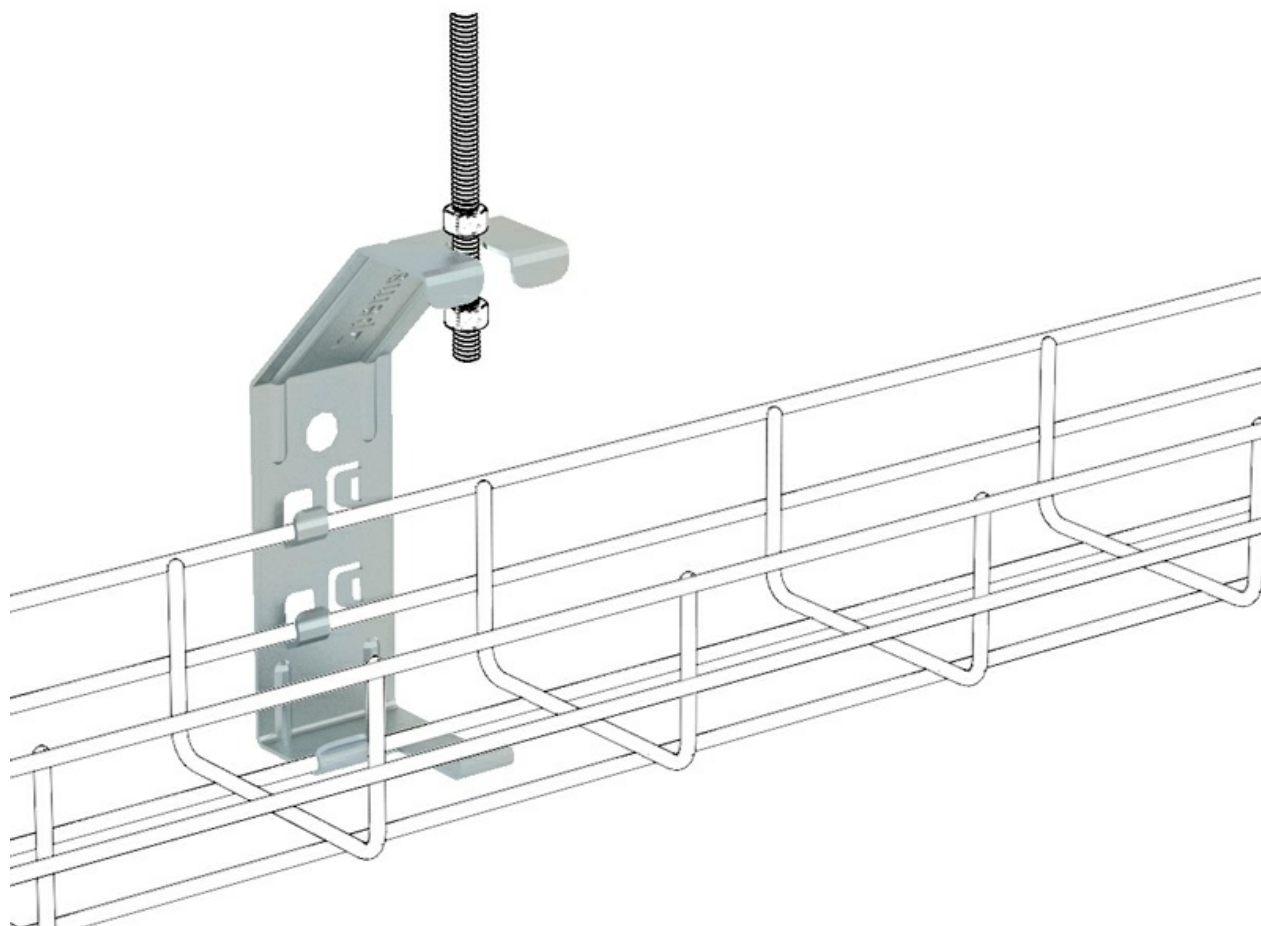

**Light Duty Ceiling Support** ( Ref: 62026020 )

