
Wall Brackets

Medium Duty Cantilever M-Plus



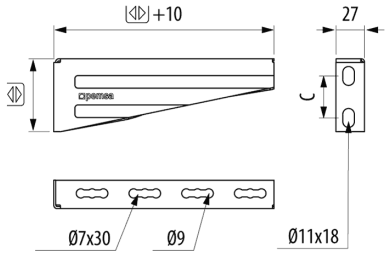

Description

Multipurpose cantilever for fixing Rejiband®, Pemsaband® and Megaband® cable trays in wall mounting, wall mounting on rail, or in ceiling mounting installed through reinforced cantilever arms.

Advantages

Universal mounting system compatible with Rejiband® wire mesh trays, Pemsaband® sheet trays and Megaband® ladder. A single support for all trays and ladder. Reduction in the number of references.

In accordance with the IEC 61537 and CE standard with respect to directive 2014/35 / EU.

Available in PG, Pre-galvanized and AZ+, High-resistance alloy corrosion protection systems.

Applications

Suitable for Spiderband® cable suspension installations, for Rejiband® wire mesh trays, Pemsaband® sheet trays and other items such as luminaires, pipes, air conditioning, signage, etc. Recommended for indoor installations.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Medium Duty Cantilever M-Plus

Main technical characteristics

PG3, Pregalvanised, ZM High Resistance Alloy | 100, 150, 200, 300, 400, 500, 600 | 1 | Steel with surface coating | -50 / 150 °C | A1 No combustible | ETIM 10 EC001003

Product data

Ⓢ	Ⓕ	IEC 61537		REF	kg/u
PG	PG3, Pregalvanised	Class 3	100	82003768	0,103
PG	PG3, Pregalvanised	Class 3	150	82003769	0,149
PG	PG3, Pregalvanised	Class 3	200	82003770	0,250
PG	PG3, Pregalvanised	Class 3	300	82003771	0,411
PG	PG3, Pregalvanised	Class 3	400	82003772	0,544
PG	PG3, Pregalvanised	Class 3	500	82003773	0,671
PG	PG3, Pregalvanised	Class 3	600	82003774	0,798
AZ+	ZM High Resistance Alloy	Class 8	100	82003775	0,105
AZ+	ZM High Resistance Alloy	Class 8	150	82003776	0,151
AZ+	ZM High Resistance Alloy	Class 8	200	82003777	0,253
AZ+	ZM High Resistance Alloy	Class 8	300	82003778	0,415
AZ+	ZM High Resistance Alloy	Class 8	400	82003779	0,550
AZ+	ZM High Resistance Alloy	Class 8	500	82003780	0,678
AZ+	ZM High Resistance Alloy	Class 8	600	82003781	0,807

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Medium Duty Cantilever M-Plus

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."