
Wall Brackets

17/11/2026



# Medium Duty Cantilever M-Plus ( Ref: 82003779 )

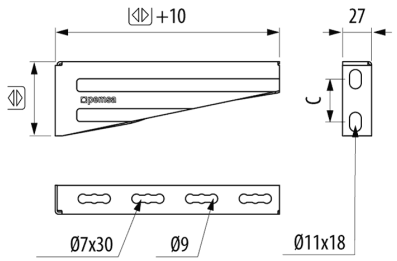


## Description

Multipurpose cantilever for fixing Rejiband®, Pemsaband® and Megaband® cable trays in wall mounting, wall mounting on rail, or in ceiling mounting installed through reinforced cantilever arms. Width 400 mm, With AZ+ protection system, ZM finish

## Advantages

In accordance with the IEC 61537 and CE standard with respect to directive 2014/35 / EU.

Available in PG, Pre-galvanized and AZ+, High-resistance alloy corrosion protection systems.

Universal mounting system compatible with Rejiband® wire mesh trays, Pemsaband® sheet trays and Megaband® ladder. A single support for all trays and ladder. Reduction in the number of references.

## Applications

Suitable for Spiderband® cable suspension installations, for Rejiband® wire mesh trays, Pemsaband® sheet trays and other items such as luminaires, pipes, air conditioning, signage, etc. Recommended for indoor installations.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Wall Brackets

17/11/2026



# Medium Duty Cantilever M-Plus ( Ref: 82003779 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC001003 | **u** | 1 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | | **Material** | Steel with surface coating |
| **Protection System** | AZ+ | **Working temperature range (°C)** | -50 / 150 °C |
| **Finish** | ZM High Resistance Alloy | **Fire resistance** | A1 No combustible |
| **Resistance Class** | Class 8 | | |
| **Width (mm)** | 400 | | |
| **kg/u** | 0,550 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."