


Omega SPLUS Ceiling Bracket

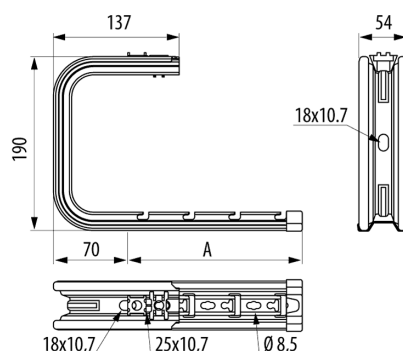

Description

Support with omega profile and universal connection system for Rejiband® and Pemsaband® trays mounted to the ceiling. Click fixing system. Made of steel and available for widths of 100, 150, 200, 300 and 400 mm and in various Protection Systems.

Advantages

Click system allows fast connection of the wire mesh tray without the need of fixings. Greater economy and quick assembly.

Universal mounting system compatible with Rejiband® grid trays, Pemsaband® sheet and PVC trays. A single support for all trays. Reduction in the number of references.

C shape, which allows the introduction of the cables from the side. Includes plugs and protectors to improve installation and protect the installer.

N Mark of Aenor, in accordance with IEC 61537 and CE conformity to Directive 2014/35 / EU. Fire resistance E90 according to DIN 4102-12.

Available in several protection systems: PG, GC, BK8 and stainless steel AISI 304 and AISI 316L.

Applications

Suitable for supporting medium loads of cable trays to the ceiling for electrical installations and / or of telecommunications in: Civil works, tunnels, car parks, public buildings, commercial centres, large infrastructures such as: Airports, underground, rail, tertiary sector, industrial naval, petrochemical, textile, chemical and food applications, according to the finish.

Solutions



FOOD INDUSTRY RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

 190	 100, 150, 200, 300, 400	 4	 -50 / 150 °C	ETIM 10 EC001003
--	---	---	--	---------------------

Product data

Ⓢ	Ⓜ	Ⓛ	Ref	kg/u	Ⓜ	CTA	ⓧ
PG	Class 3	100	62022104	0,371	Steel with surface coating	33	E90 (90 min. 1000°C)
PG	Class 3	150	62022154	0,398	Steel with surface coating	36	E90 (90 min. 1000°C)
PG	Class 3	200	62022204	0,592	Steel with surface coating	29	E90 (90 min. 1000°C)
PG	Class 3	300	62022304	0,696	Steel with surface coating	25	E90 (90 min. 1000°C)
PG	Class 3	400	62022404	0,798	Steel with surface coating	18	E90 (90 min. 1000°C)
AZ+	Class 8	100	62032104	0,362	Steel with surface coating	33	A1 No combustible
AZ+	Class 8	150	62032154	0,389	Steel with surface coating	36	E90 (90 MIN. 1000°C),A1 NO COMBUSTIBLE
AZ+	Class 8	200	62032204	0,583	Steel with surface coating	29	A1 No combustible
AZ+	Class 8	300	62032304	0,687	Steel with surface coating	25	A1 No combustible
AZ+	Class 8	400	62032404	0,789	Steel with surface coating	18	A1 No combustible
INOX	Class 9C	100	62052104	0,371	Stainless steel AISI 304	33	E90 (90 min. 1000°C)
INOX	Class 9C	150	62052154	0,398	Stainless steel AISI 304	36	E90 (90 min. 1000°C)
INOX	Class 9C	200	62052204	0,592	Stainless steel AISI 304	29	E90 (90 min. 1000°C)
INOX	Class 9C	300	62052304	0,696	Stainless steel AISI 304	25	E90 (90 min. 1000°C)
INOX	Class 9C	400	62052404	0,798	Stainless steel AISI 304	18	E90 (90 min. 1000°C)
INOX	Class 9D	100	62062104	0,371	Acero inoxidable AISI 316L	33	E90 (90 min. 1000°C)
INOX	Class 9D	150	62062154	0,398	Acero inoxidable AISI 316L	36	E90 (90 min. 1000°C)
INOX	Class 9D	200	62062204	0,592	Acero inoxidable AISI 316L	29	E90 (90 min. 1000°C)
INOX	Class 9D	300	62062304	0,696	Acero inoxidable AISI 316L	25	E90 (90 min. 1000°C)
INOX	Class 9D	400	62062404	0,798	Acero inoxidable AISI 316L	18	E90 (90 min. 1000°C)
BK8	Class 8	100	62082104	0,379	Steel with surface coating	33	E90 (90 min. 1000°C)
BK8	Class 8	150	62082154	0,407	Steel with surface coating	36	E90 (90 min. 1000°C)
BK8	Class 8	200	62082204	0,602	Steel with surface coating	29	E90 (90 min. 1000°C)
BK8	Class 8	300	62082304	0,707	Steel with surface coating	25	E90 (90 min. 1000°C)
BK8	Class 8	400	62082404	0,811	Steel with surface coating	18	E90 (90 min. 1000°C)

Ⓢ Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum

LN - Brass or Nickel-plated brass

 Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic




www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."




Omega SPLUS Ceiling Bracket

Load diagrams

		kg
	100	33
	150	36
	200	29
	300	25
	400	18

Product applications

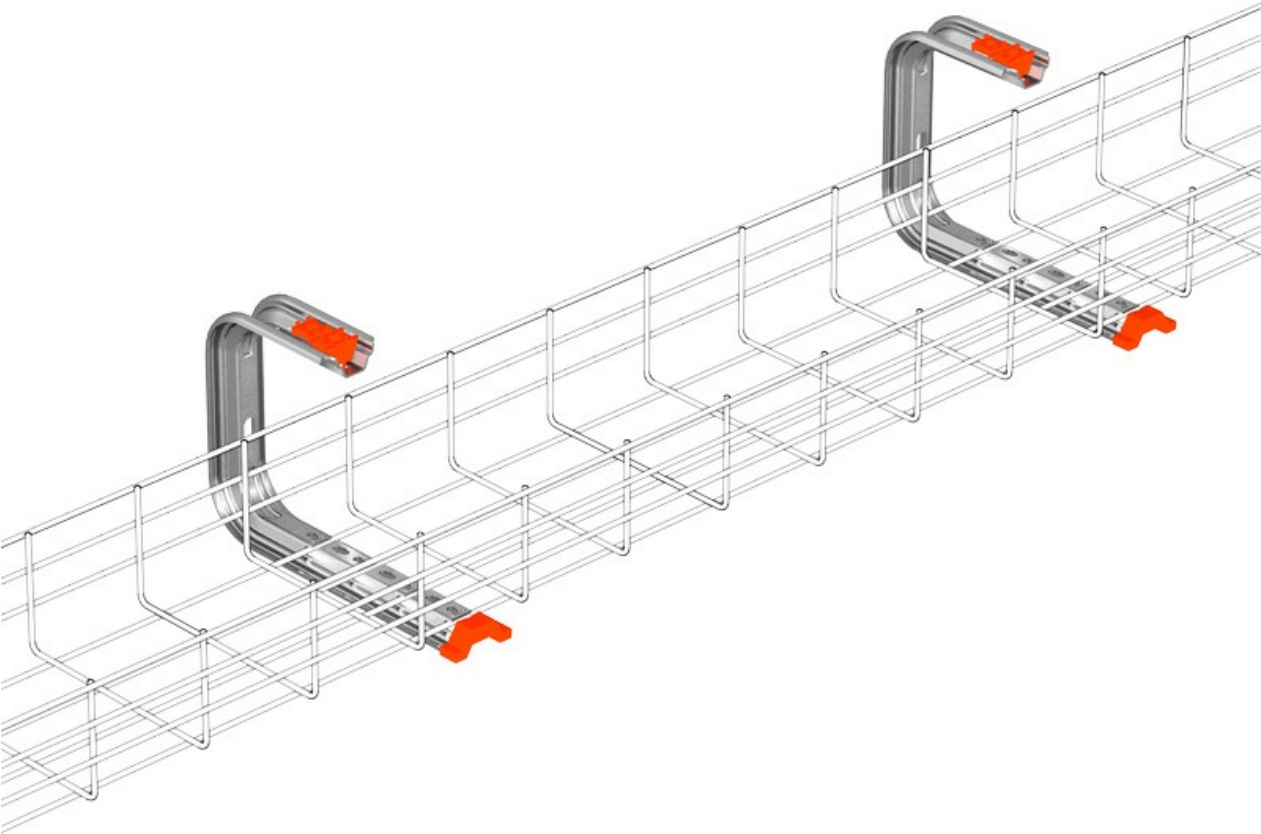

Omega SPLUS Ceiling Bracket

