


Omega SPLUS Ceiling Bracket (Ref: 62062404

1/4

)

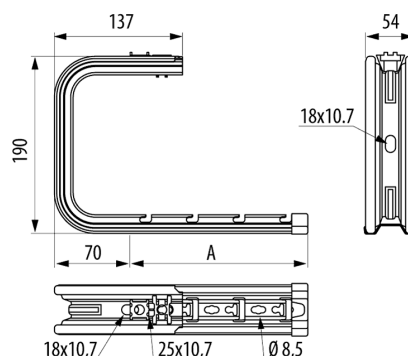

Description

Support with omega profile and universal connection system for Rejiband® and Pemsaband® trays mounted to the ceiling. Width 400 mm, With INOX protection system, I316L finish. Click fixing system. Made of steel and available for widths of 100, 150, 200, 300 and 400 mm and in various Protection Systems.

Advantages

Available in several protection systems: PG, GC, BK8 and stainless steel AISI 304 and AISI 316L.

C shape, which allows the introduction of the cables from the side. Includes plugs and protectors to improve installation and protect the installer.

N Mark of Aenor, in accordance with IEC 61537 and CE conformity to Directive 2014/35 / EU. Fire resistance E90 according to DIN 4102-12.

Click system allows fast connection of the wire mesh tray without the need of fixings. Greater economy and quick assembly.

Universal mounting system compatible with Rejiband® grid trays, Pemsaband® sheet and PVC trays. A single support for all trays. Reduction in the number of references.

Applications

Suitable for supporting medium loads of cable trays to the ceiling for electrical installations and / or of telecommunications in: Civil works, tunnels, car parks, public buildings, commercial centres, large infrastructures such as: Airports, underground, rail, tertiary sector, industrial naval, petrochemical, textile, chemical and food applications, according to the finish.

Solutions



FOOD INDUSTRY RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC001003	u	4
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	4,239	Material	Acero inoxidable AISI 316L
Protection System	INOX	SWL (kg)	18
Finish	Stainless Steel AISI 316L	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 9D	Fire resistance	E90 (90 min. 1000°C)
Flange (mm)	190		
Width (mm)	400		
kg/u	0,798		

Protection System


- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials


- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Omega SPLUS Ceiling Bracket (Ref: 62062404

Load diagrams

		kg
	100	33
	150	36
	200	29
	300	25
	400	18


Product applications

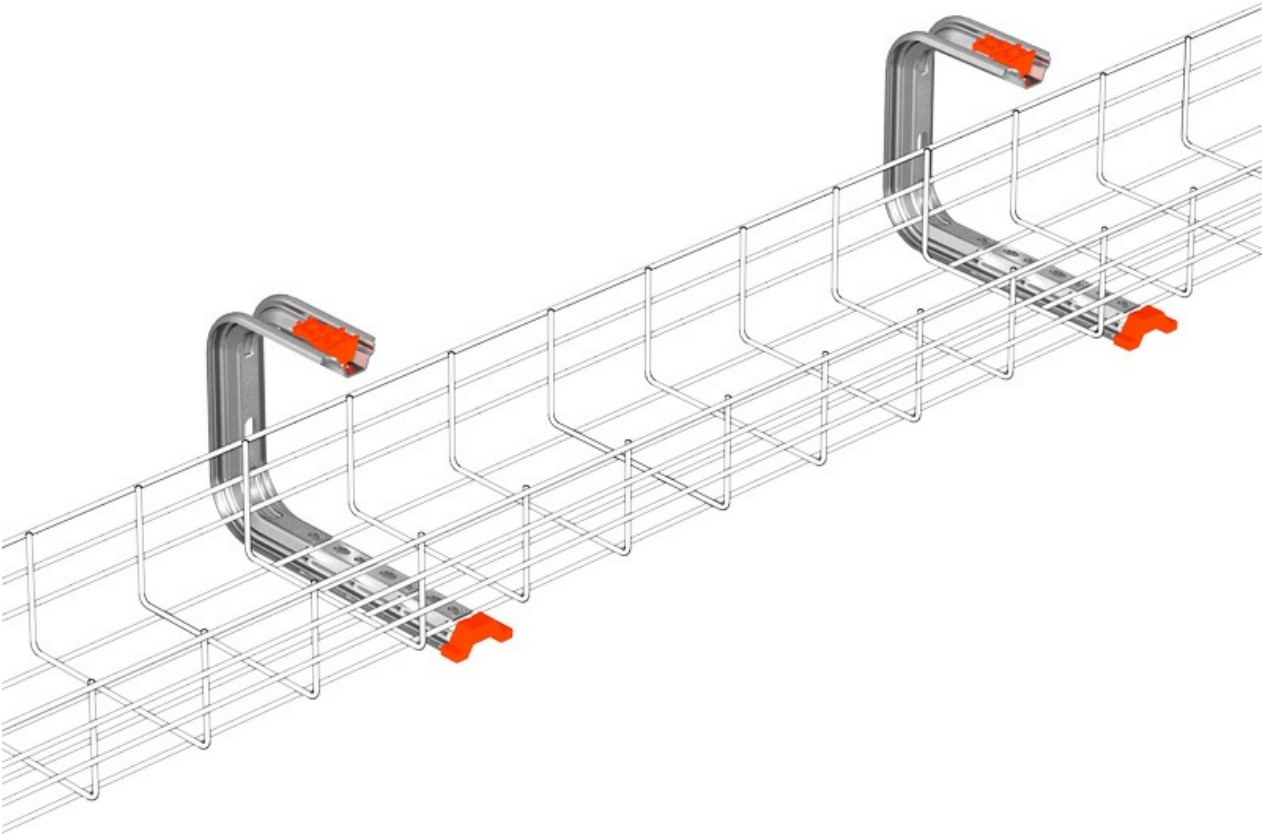

Omega SPLUS Ceiling Bracket (Ref: 62062404

4/4

)

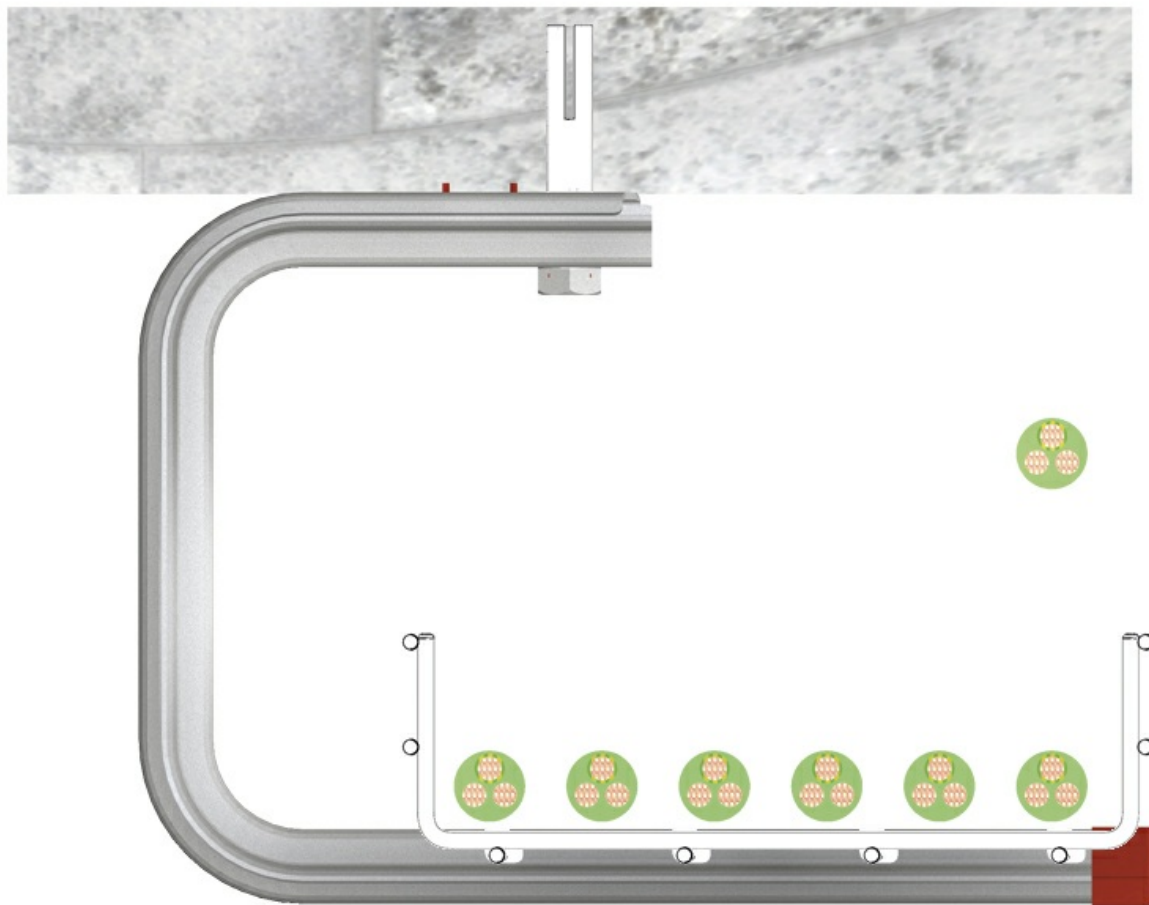

www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

