
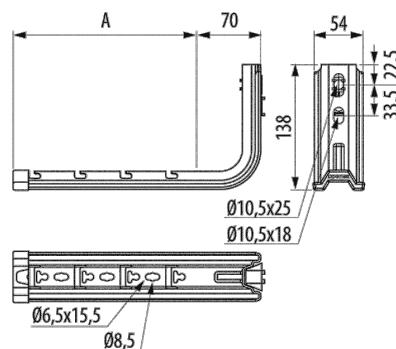


Omega SPLUS Bracket (Ref: 62051104)

1/8

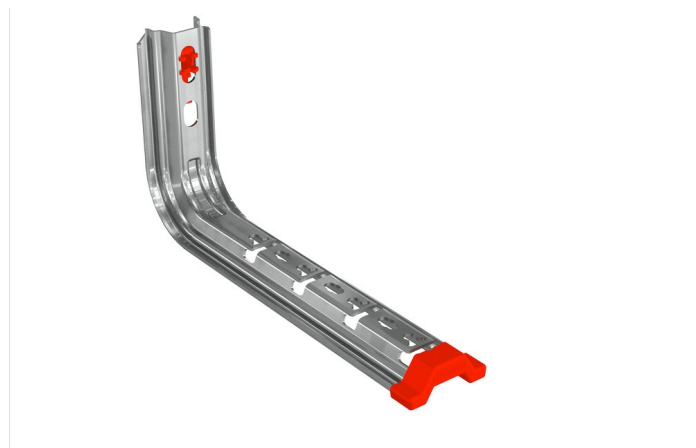

Description

Support with omega profile and universal connection system for Rejiband® and Pemsaband® trays mounted on the wall, channel or from the ceiling. Width 100 mm, With INOX protection system, I304 finish. Click fixing system. Made of steel and available for widths of 100, 150, 200, 300 and 400 mm and in various Protection Systems.

Advantages

Available in several protection systems: PG, GC, BK8 and stainless steel AISI 304 and AISI 316L.

N Mark of Aenor, in accordance with IEC 61537 and CE conformity to Directive 2014/35 / EU. Fire resistance E90 according to DIN 4102-12.

Reinforced omega profile. Increase support features. Includes plugs and protectors to facilitate installation and safeguard the installer.

Click system allows fast connection of the wire mesh tray without the need of fixings. Greater economy and quick assembly.

Universal mounting system compatible with Rejiband® grid trays, Pemsaband® sheet and PVC trays. A single support for all trays. Reduction in the number of references.

Applications

Suitable for supporting medium loads of cable trays for electrical installations and/or of telecommunications in: Civil works, tunnels, car parks, public buildings, commercial centres, large infrastructures such as: Airports, underground, rail, tertiary sector, industrial naval, petrochemical, textile, chemical and food applications, according to the finish.

Solutions



FOOD INDUSTRY RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC000022	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		1,226	
Protection System		INOX	
Finish		Stainless Steel AISI 304	
Resistance Class		Class 9C	
Width (mm)		100	
kg/u		0,231	
u		5	
Material		Stainless steel AISI 304	
SWL (kg)		60	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		E90 (90 min. 1000°C)	

🔒 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

🧱 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic


Load diagrams


↓CTA↓ (kg)		kg
	100	60
	150	60
	200	60
	300	38
	400	28

Product applications





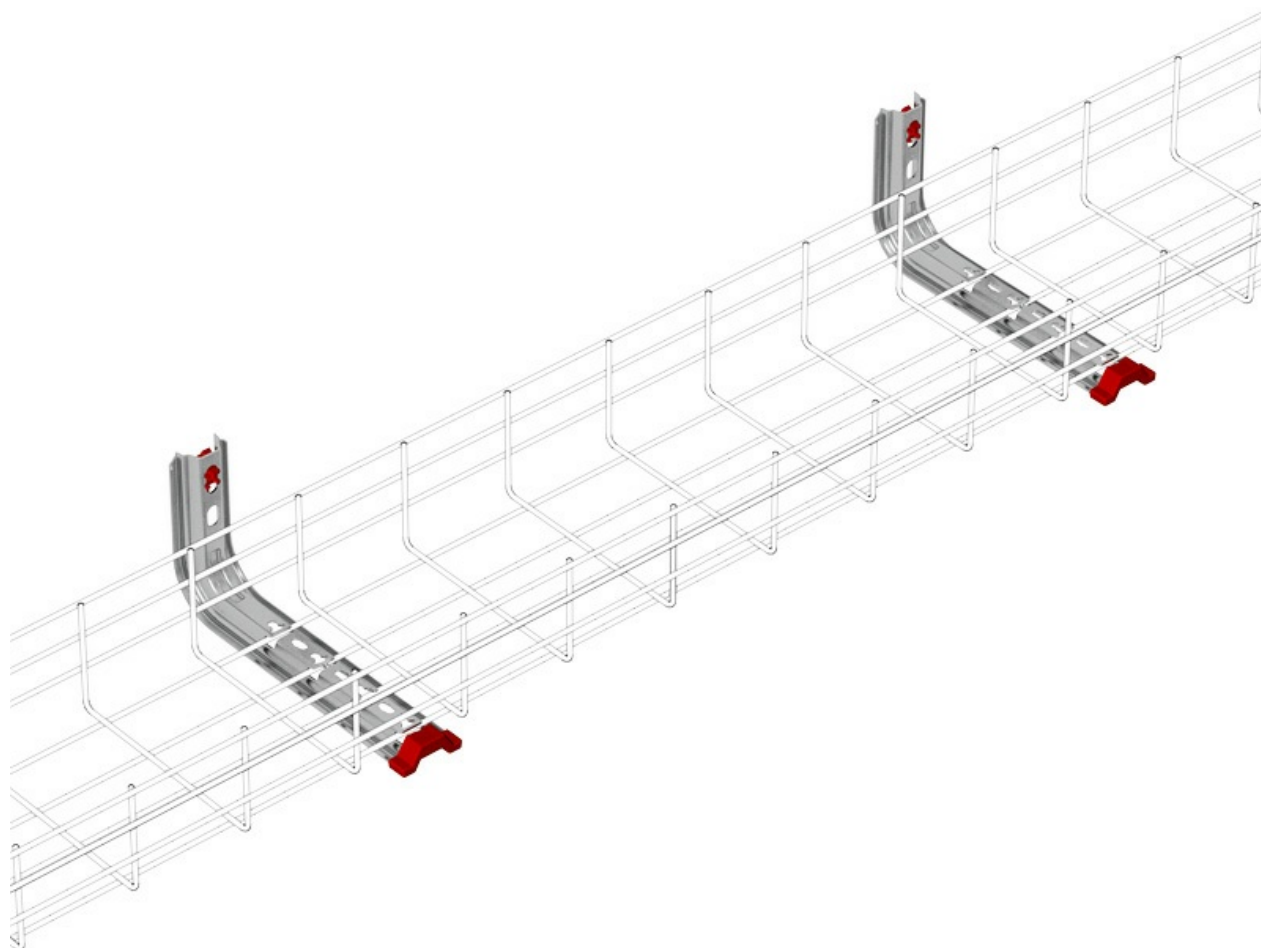

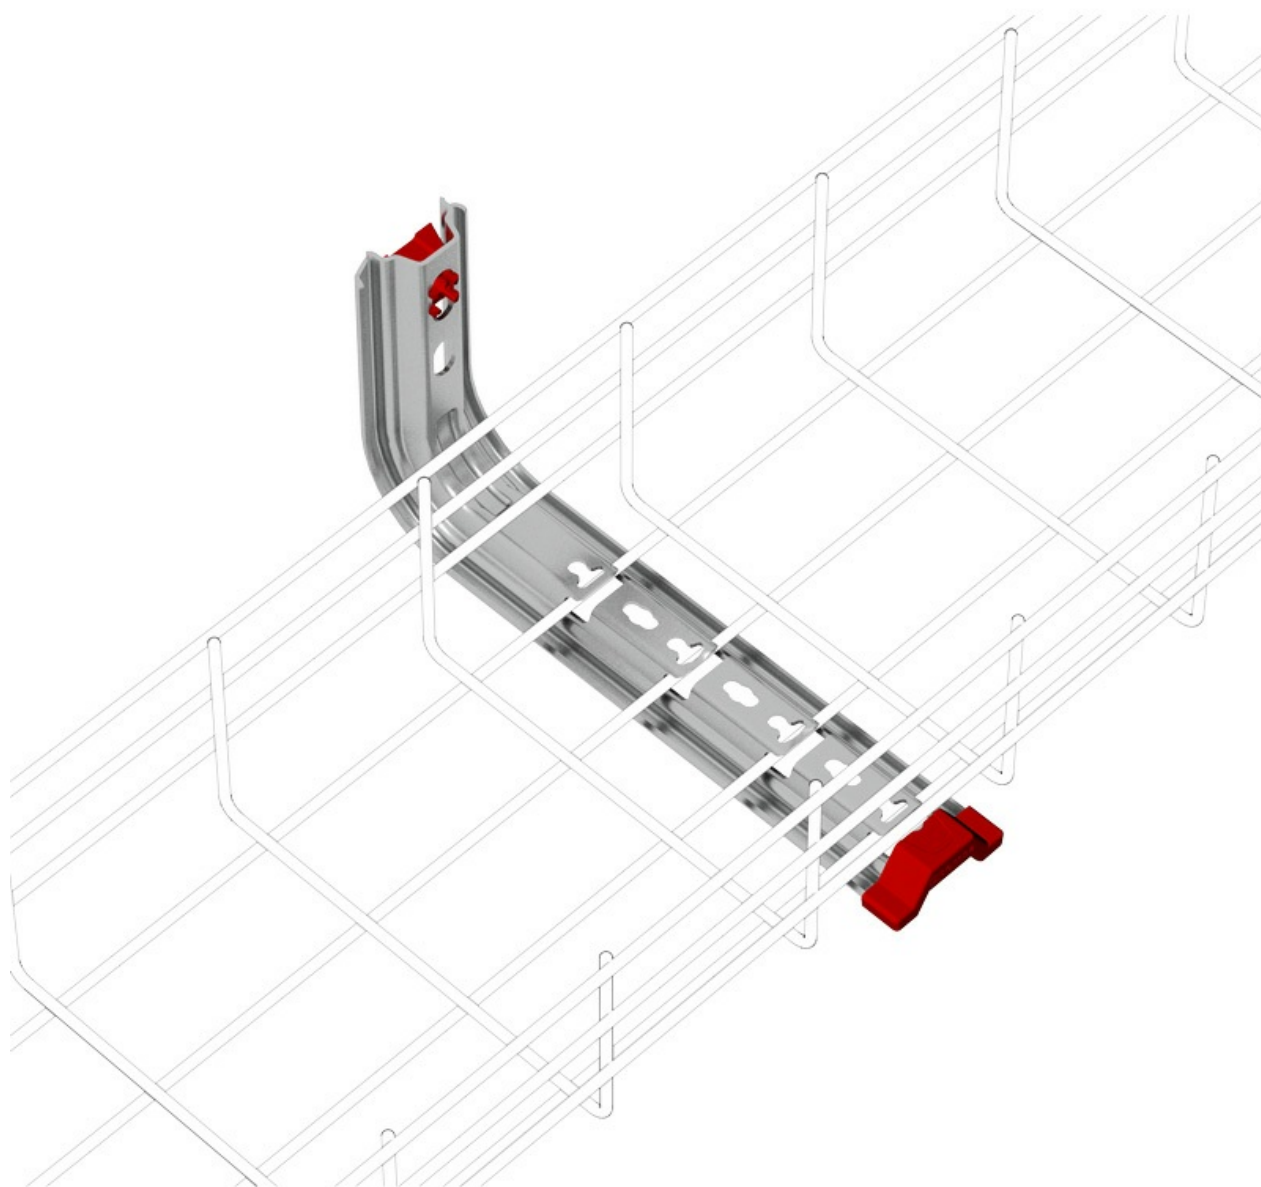

Omega SPLUS Bracket (Ref: 62051104)

