
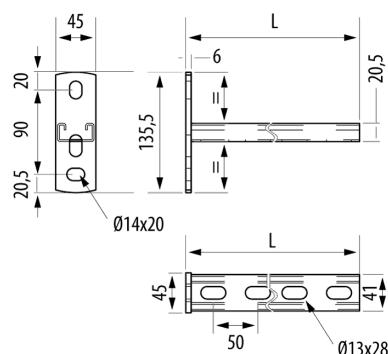


Cantilever Arm 41x21

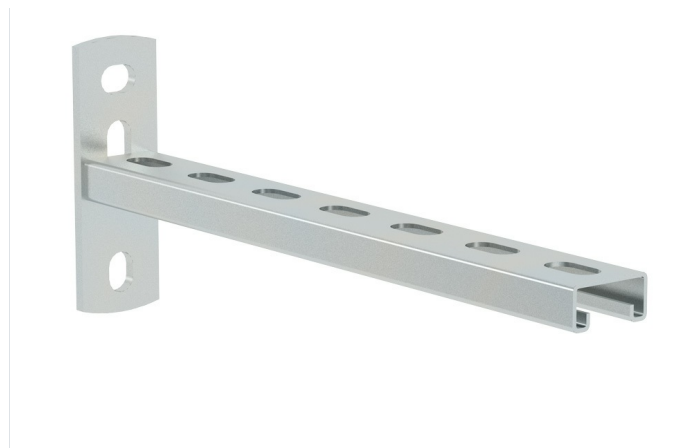

Description

41x21mm horizontal support for wall fixing of cable trays, electrical conduits and other heating pipe installations, A/C, fire protection systems, etc. Excellent loading capacity. Robust and secure system. Made of steel, available in various protection systems.

Advantages

Available in widths from 100 to 1000 mm depending on the protection system. It has wide fixing options.

The total length of the support is: (cable tray width + 55mm), that is, it has an additional measure of length to favor the separation of the installation from the facing or surface.

This range of Cantilever arms 41 has a quick installation solution when using the Strut clip, part number 67030049, making it a quick and safe installation option for Rejiband® wire mesh trays.

Load values according to international standard IEC 61537.

Available in PG and GC Protection Systems

In accordance with CE standard with respect to directive 2014/35 / EU.

Applications

Application as a horizontal wall support. For supporting Cable Trays (rejiband®, pemsaband®, megaband®, among others) but it is also very useful for supporting electrical conduits and other heating pipe installations, A/C, fire systems etc.

Solutions



Main technical characteristics

 100, 200, 300, 500, 1000	 1	 Steel with surface coating	 A1 No combustible	ETIM 10 EC001003
---	---	--	---	---------------------

Product data

			Ref	kg/u		
EZ	Class 3	100	82002600	0,462	242	-25 / 105 °C
EZ	Class 3	200	82002601	0,607	196	-25 / 105 °C
EZ	Class 3	300	82002602	0,754	146	-25 / 105 °C
EZ	Class 3	500	82002603	1,040	94	-50 / 150 °C
EZ	Class 3	1000	82002604	1,770	36	-50 / 150 °C
GC	Class 6	100	82002605	0,476	242	-25 / 105 °C
GC	Class 6	200	82002606	0,627	196	-25 / 105 °C
GC	Class 6	300	82002607	0,780	146	-25 / 105 °C

 Protection System


- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

Cantilever Arm 41x21

Load diagrams

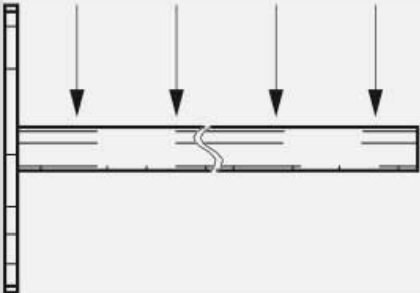↓ CTA ↓ (kg)		kg
	100	242
	200	196
	300	146
	500	94
	1000	36

Product applications




www.pemsa-rejiband.com


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."




Cantilever Arm 41x21

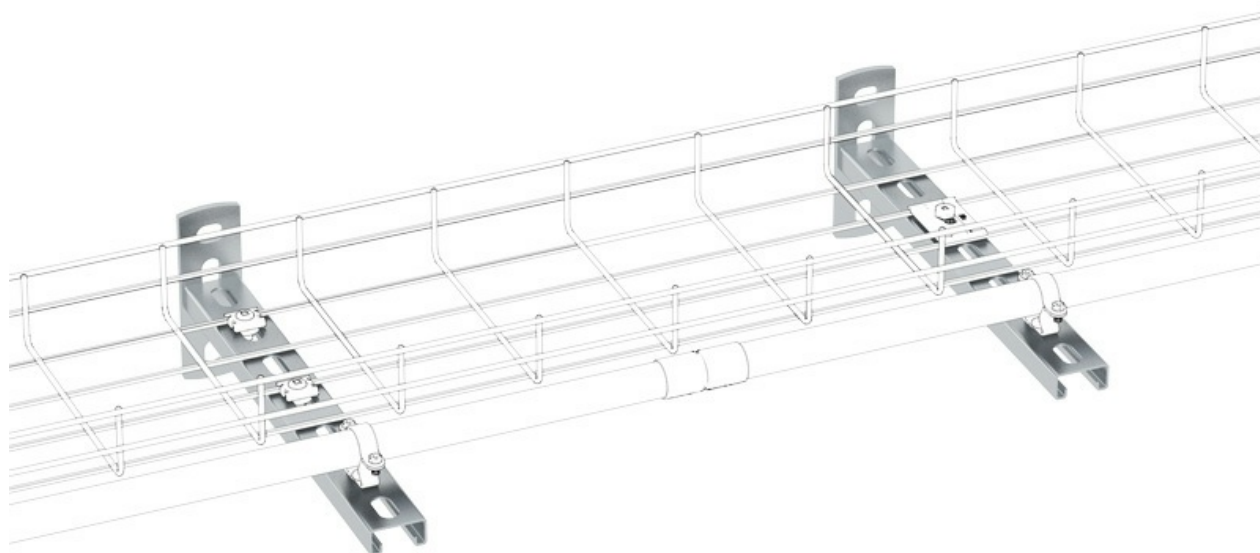

Cantilever Arm 41x21

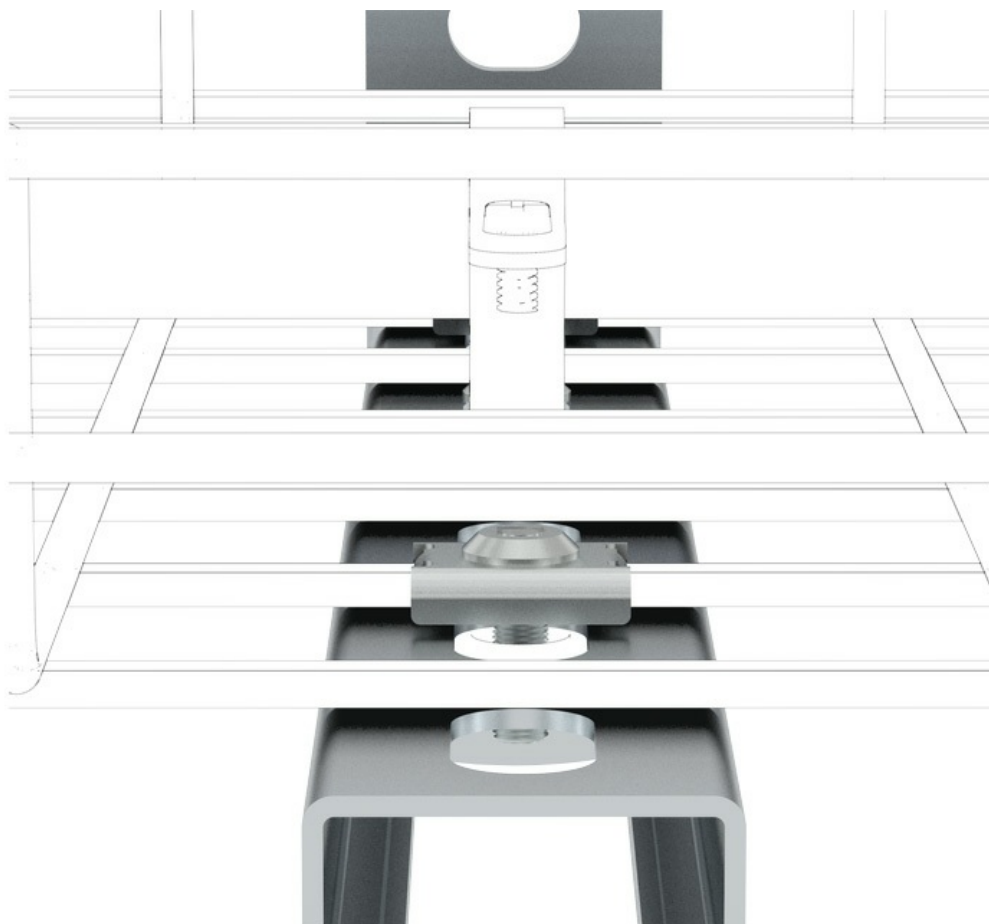

Cantilever Arm 41x21

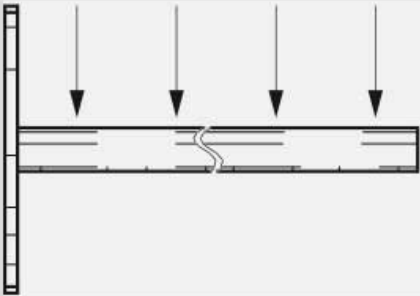↓ CTA ↓ (kg)	↔	kg
	100	242
	200	196
	300	146
	500	94
	1000	36

