

Description

41x21mm horizontal support for wall fixing of cable trays, electrical conduits and other heating pipe installations, A/C, fire protection systems, etc. Width 300 mm, With EZ protection system. Excellent loading capacity. Robust and secure system. Made of steel, available in various protection systems.

Advantages

Available in PG and GC Protection Systems

Available in widths from 100 to 1000 mm depending on the protection system. It has wide fixing options.

This range of Cantilever arms 41 has a quick installation solution when using the Strut clip, part number 67030049, making it a quick and safe installation option for Rejiband® wire mesh trays.

The total length of the support is: (cable tray width + 55mm), that is, it has an additional measure of length to favor the separation of the installation from the facing or surface.

Valores de carga conforme a norma internacional IEC 61537.

Applications

Aplicación como soporte horizontal a pared, para la soportación de bandejas portacables, (rejiband®, pemsaband®, megaband®, entre otras), sino que es muy útil para el soporte de tubos eléctricos y otras instalaciones de tuberías de calefacción, A/A, sistemas contra incendios, etc.

Solutions



Product data

Protection System	EZ	u	1
Finish	EZ3, Electrogalvanised	Material	Steel with surface coating
Resistance Class	Class 3	SWL (kg)	146
Width (mm)	300	Working temperature range (°C)	-25 / 105 °C
kg/u	0.754	Fire resistance	A1 No combustible

Protection System


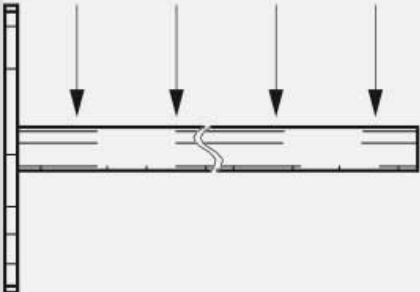
- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



Load diagrams

↓ CTA ↓ (kg)		kg
	100	242
	200	196
	300	146
	500	94
	1000	36

Product applications



