
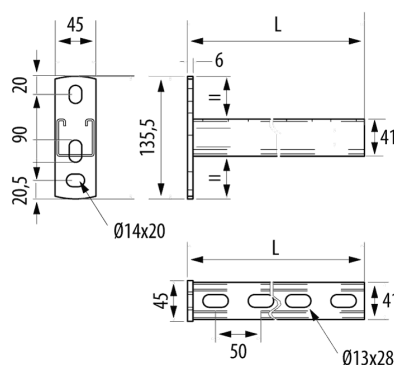


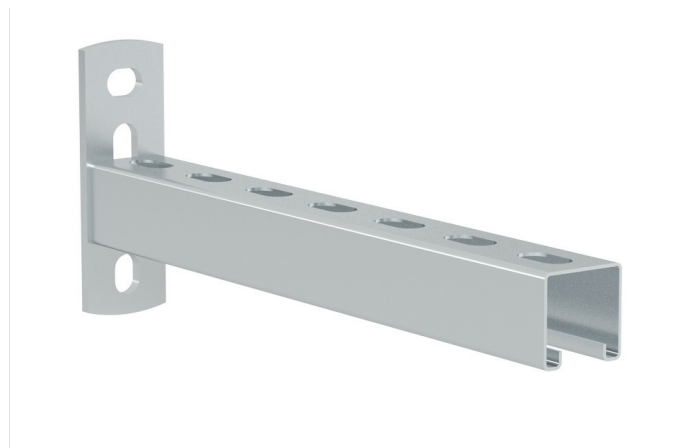

### Description

41x41mm horizontal support for wall fixing of cable trays, electrical conduits and other heating pipe installations, A/C, fire protection systems, etc. Width 300 mm, With GC protection system, HDG finish. Excellent loading capacity. Robust and secure system. Made of steel, available in various protection systems.

### Advantages

Available in GC Protection Systems and INOX, Stainless steel AISI 304 and AISI 316L

Available in widths from 200 to 1000 mm depending on the protection system. It has wide fixing options.

This range of Cantilever arms 41 has a quick installation solution when using the Strut clip, part number 67030049, making it a quick and safe installation option for Rejiband® wire mesh trays.

The total length of the support is: (cable tray width + 55mm), that is, it has an additional measure of length to favor the separation of the installation from the facing or surface.

Load values according to international standard IEC 61537.

### Applications

Application as a horizontal wall support. For supporting Cable Trays (rejiband®, pemsaband®, megaband®, among others) but it is also very useful for supporting electrical conduits and other heating pipe installations, A/C, fire systems etc.

### Solutions



Product data

|                                       |                         |                                |                            |
|---------------------------------------|-------------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC001003                | u                              | 1                          |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 3,056                   | Material                       | Steel with surface coating |
| Protection System                     | GC                      | SWL (kg)                       | 262                        |
| Finish                                | HDG, Hot Dip Galvanised | Working temperature range (°C) | -25 / 105 °C               |
| Resistance Class                      | Class 6                 | Fire resistance                | A1 No combustible          |
| Width (mm)                            | 300                     |                                |                            |
| kg/u                                  | 1,180                   |                                |                            |

Protection System


- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic





Load diagrams

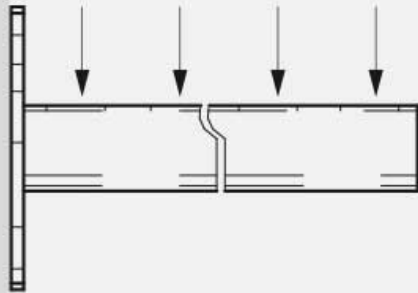
| ↓CTA↓ (kg)                                                                        |  | kg  |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----|
|  | 200                                                                                | 358 |
|                                                                                   | 300                                                                                | 262 |
|                                                                                   | 500                                                                                | 165 |
|                                                                                   | 600                                                                                | 141 |
|                                                                                   | 800                                                                                | 107 |
|                                                                                   | 1000                                                                               | 85  |

Product applications



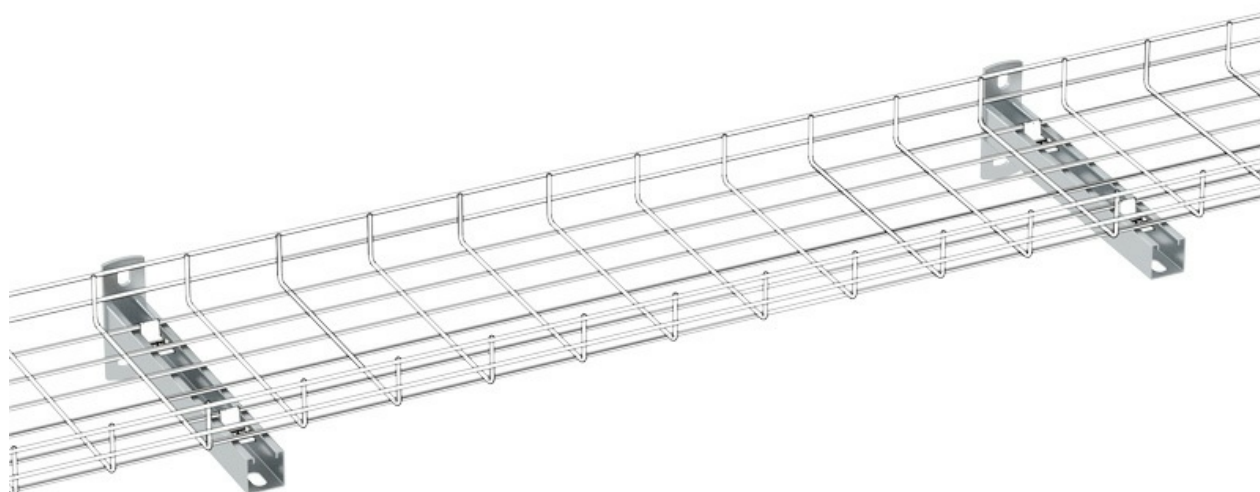

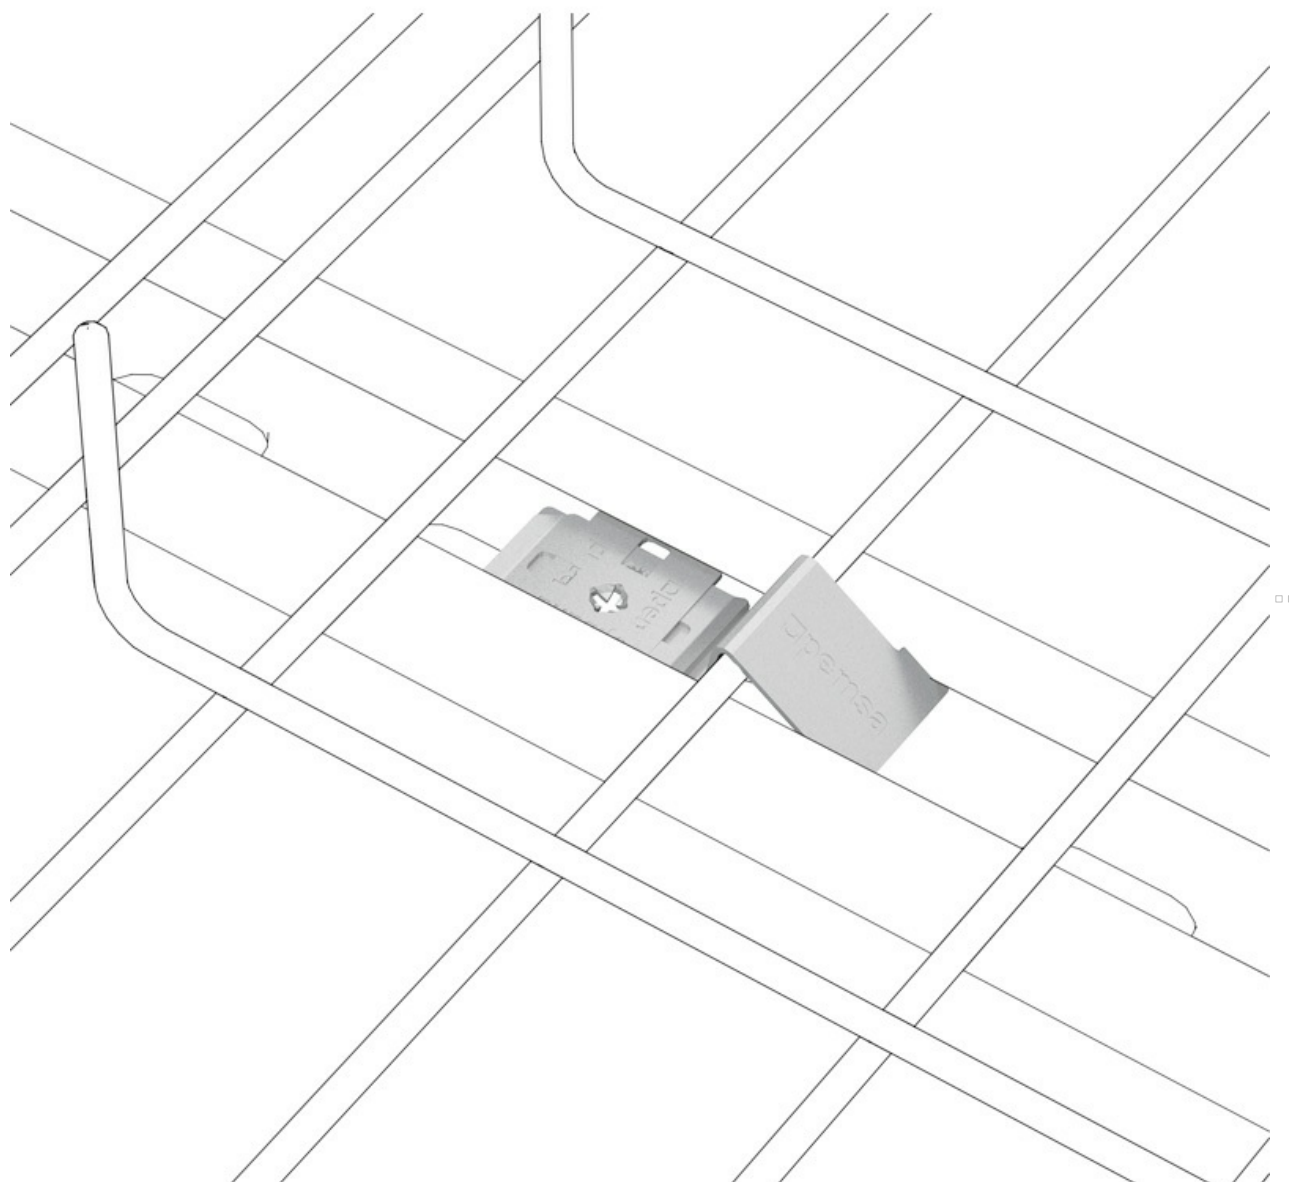
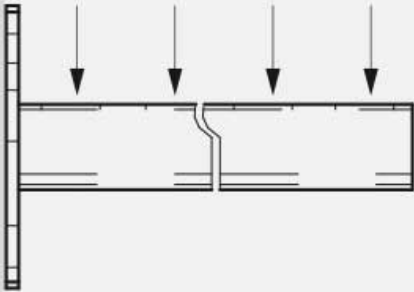
| ↓CTA↓ (kg)                                                                        | ↔    | kg  |
|-----------------------------------------------------------------------------------|------|-----|
|  | 200  | 358 |
|                                                                                   | 300  | 262 |
|                                                                                   | 500  | 165 |
|                                                                                   | 600  | 141 |
|                                                                                   | 800  | 107 |
|                                                                                   | 1000 | 85  |

