


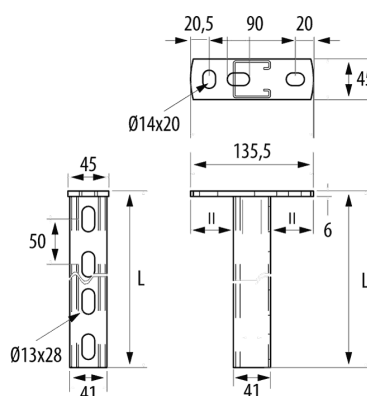

Description

41x21mm horizontal support for wall fixing of cable trays, electrical conduits and other heating pipe installations, A/C, fire protection systems, etc. Width 1000 mm, With GC protection system. Excellent loading capacity. Robust and secure system. Made of steel, available in various protection systems.

Advantages

Available in PG and GC Protection Systems

Available in widths from 100 to 1000 mm depending on the protection system. It has wide fixing options.

This range of Cantilever arms 41 has a quick installation solution when using the Strut clip, part number 67030049, making it a quick and safe installation option for Rejiband® wire mesh trays.

The total length of the support is: (cable tray width + 55mm), that is, it has an additional measure of length to favor the separation of the installation from the facing or surface.

Load values according to international standard IEC 61537.

Applications

Application as a horizontal wall support. For supporting Cable Trays (rejiband®, pemsaband®, megaband®, among others) but it is also very useful for supporting electrical conduits and other heating pipe installations, A/C, fire systems etc.

Solutions



Product data			
ETIM 10		EC001003	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		7,9	
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 6	
Width (mm)		1000	
kg/u		3,050	
u		1	
Material		Steel with surface coating	
SWL (kg)		85	
Working temperature range (°C)		-25 / 105 °C	
Fire resistance		A1 No combustible	


Ⓢ Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass


Ⓜ Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Load diagrams


□ □


Product applications

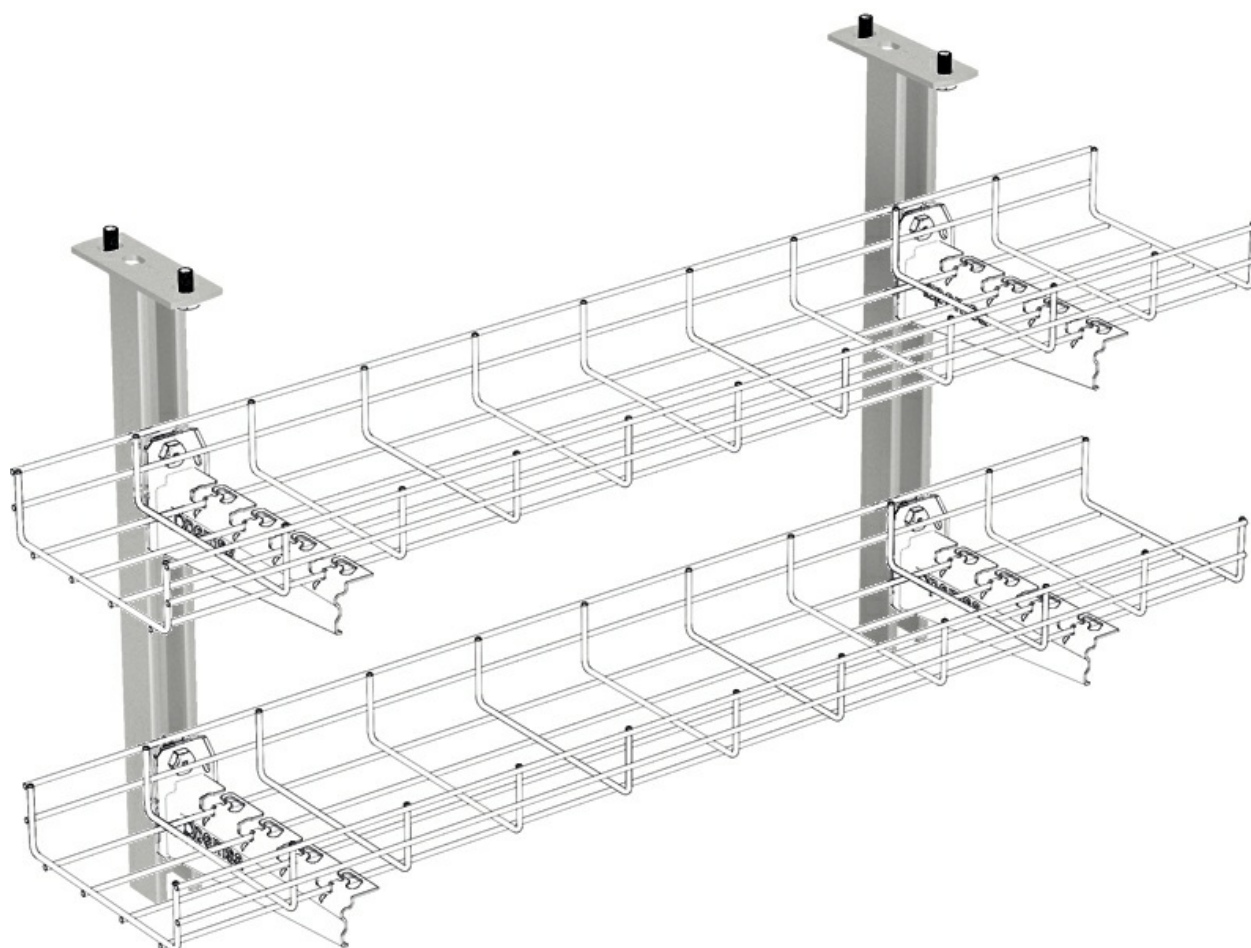


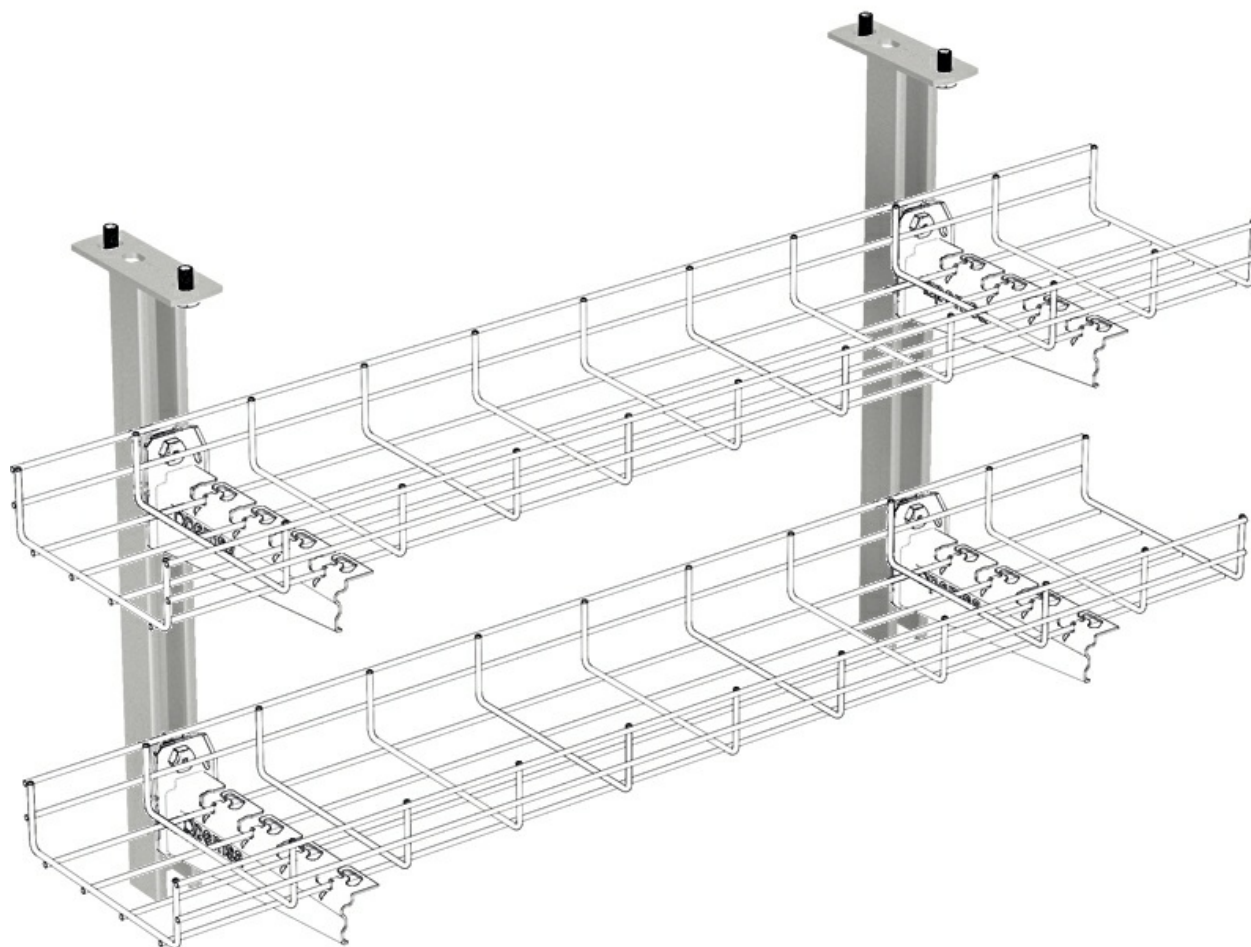





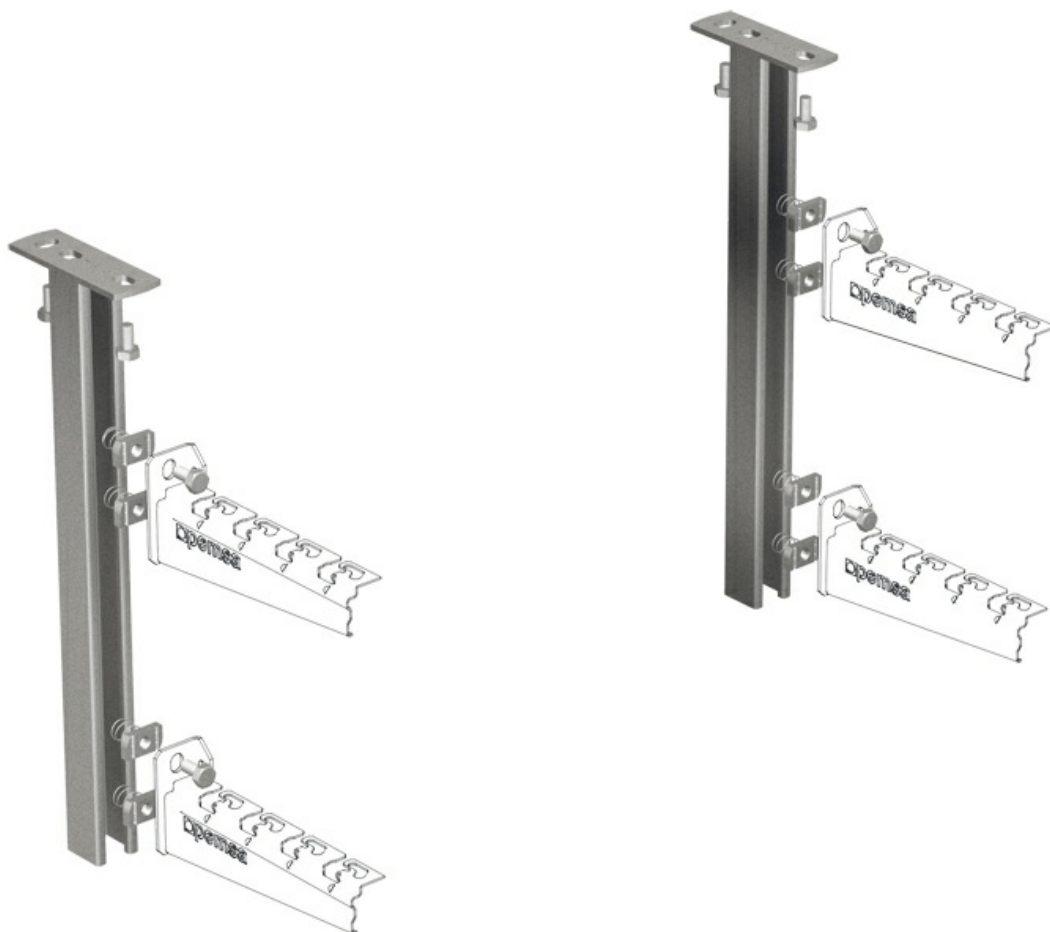


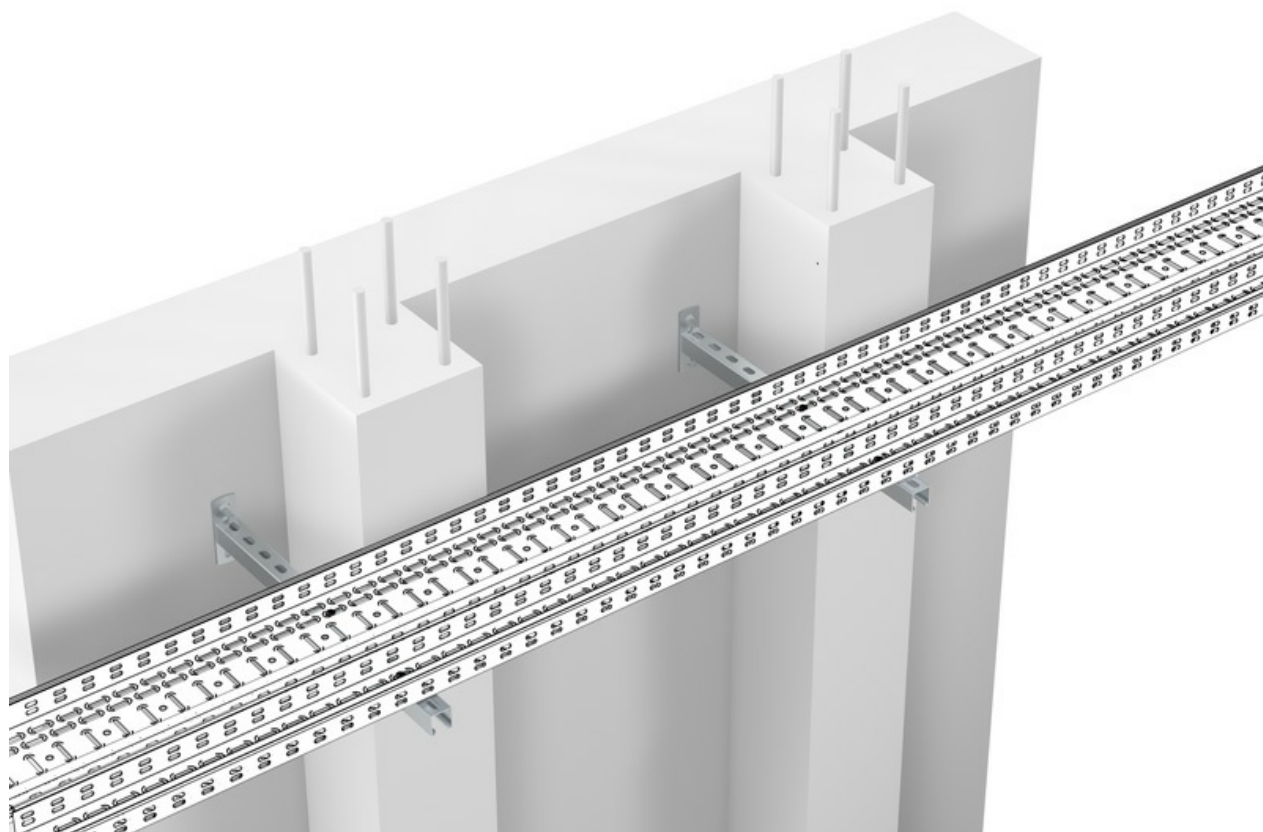


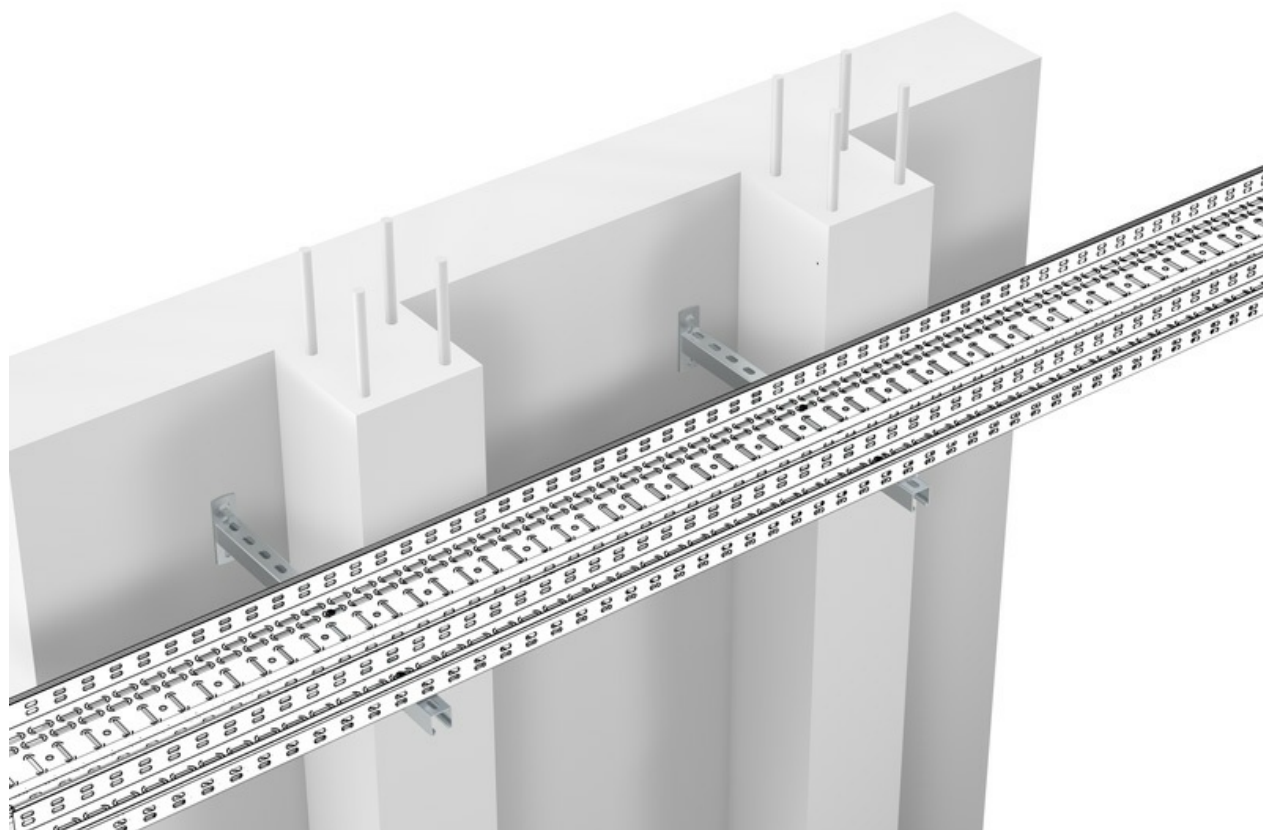

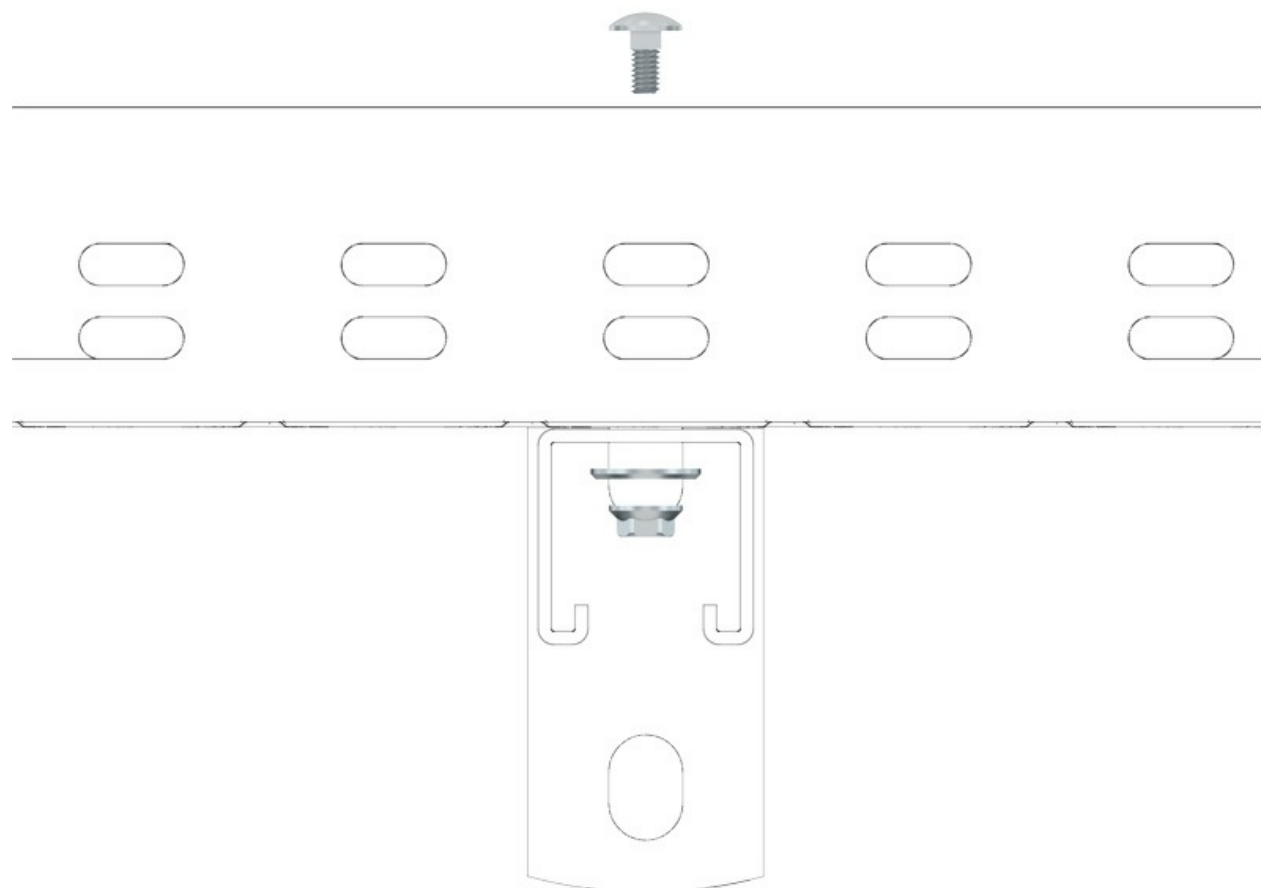

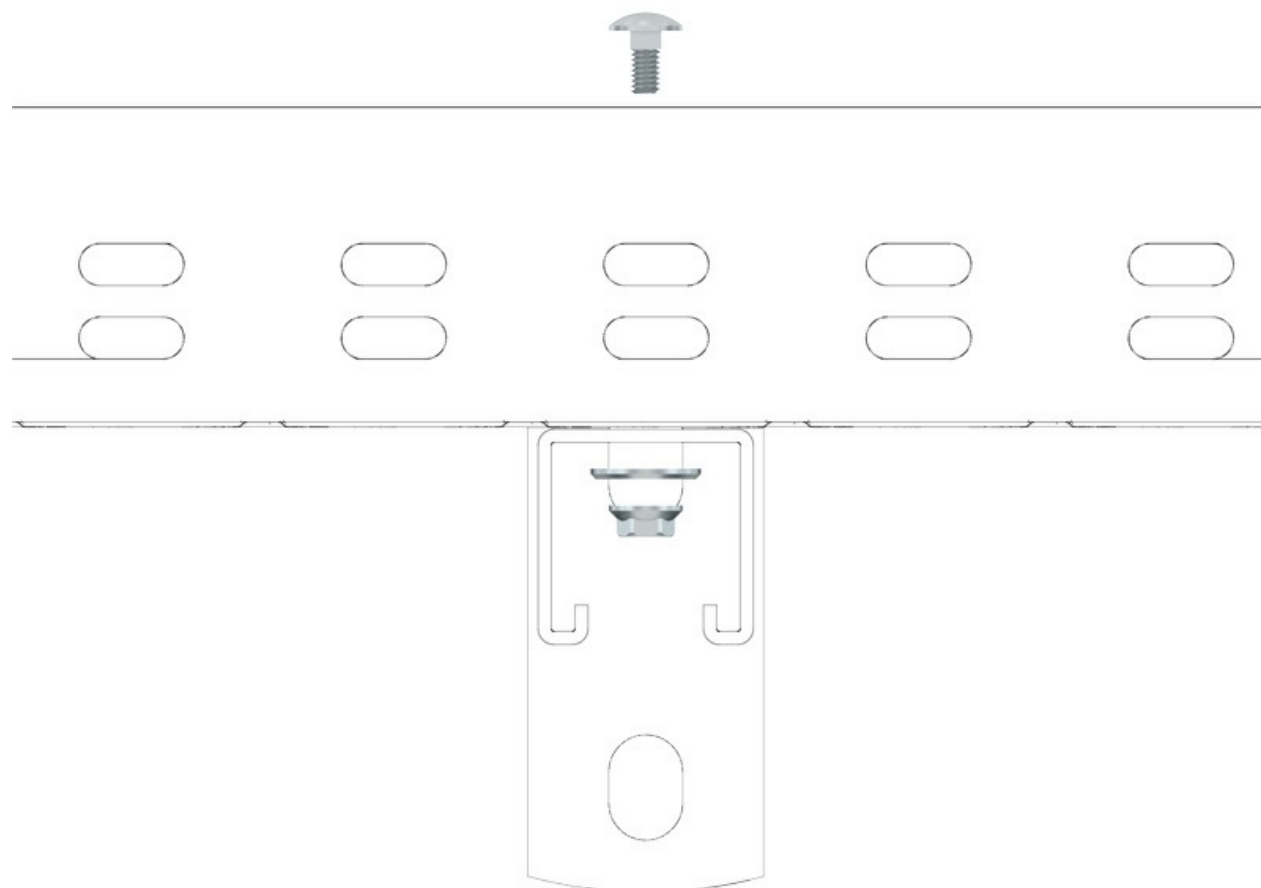

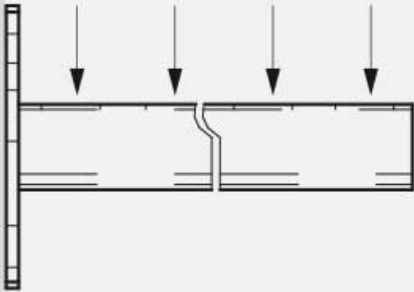↓CTA↓ (kg)		kg
	200	358
	300	262
	500	165
	600	141
	800	107
	1000	85

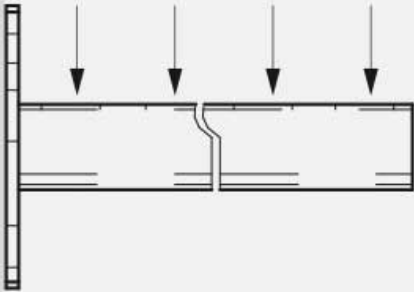↓CTA↓ (kg)		kg
	200	358
	300	262
	500	165
	600	141
	800	107
	1000	85

