


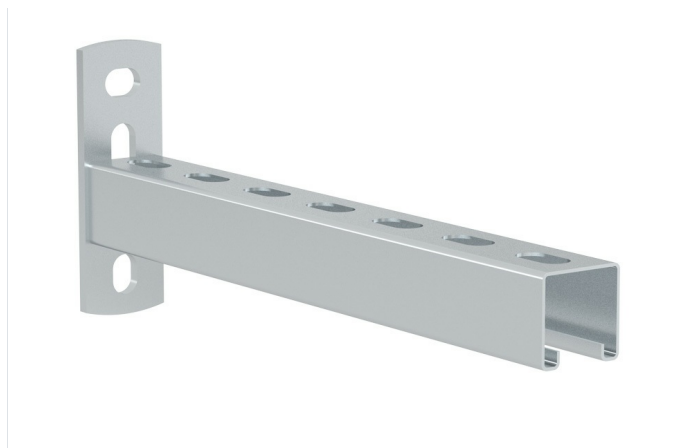

Description

41x41mm horizontal support for wall fixing of cable trays, electrical conduits and other heating pipe installations, A/C, fire protection systems, etc. Width 800 mm, With EZ protection system, EZ3 finish. Excellent loading capacity. Robust and secure system. Made of steel, available in various protection systems.

Advantages

Available in GC Protection Systems and INOX, Stainless steel AISI 304 and AISI 316L

Available in widths from 200 to 1000 mm depending on the protection system. It has wide fixing options.

This range of Cantilever arms 41 has a quick installation solution when using the Strut clip, part number 67030049, making it a quick and safe installation option for Rejiband® wire mesh trays.

The total length of the support is: (cable tray width + 55mm), that is, it has an additional measure of length to favor the separation of the installation from the facing or surface.

Load values according to international standard IEC 61537.

Applications

Application as a horizontal wall support. For supporting Cable Trays (rejiband®, pemsaband®, megaband®, among others) but it is also very useful for supporting electrical conduits and other heating pipe installations, A/C, fire systems etc.

Solutions



Product data

ETIM 10	EC001003	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	6,124	Material	Steel with surface coating
Protection System	EZ	Working temperature range (°C)	-25 / 105 °C
Finish	EZ3, Electrogalvanised	Fire resistance	A1 No combustible
Resistance Class	Class 3		
Width (mm)	800		
kg/u	2,430		

🔒 Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

🏠 Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic





Load diagrams


□ □


Product applications


□ □ □ □

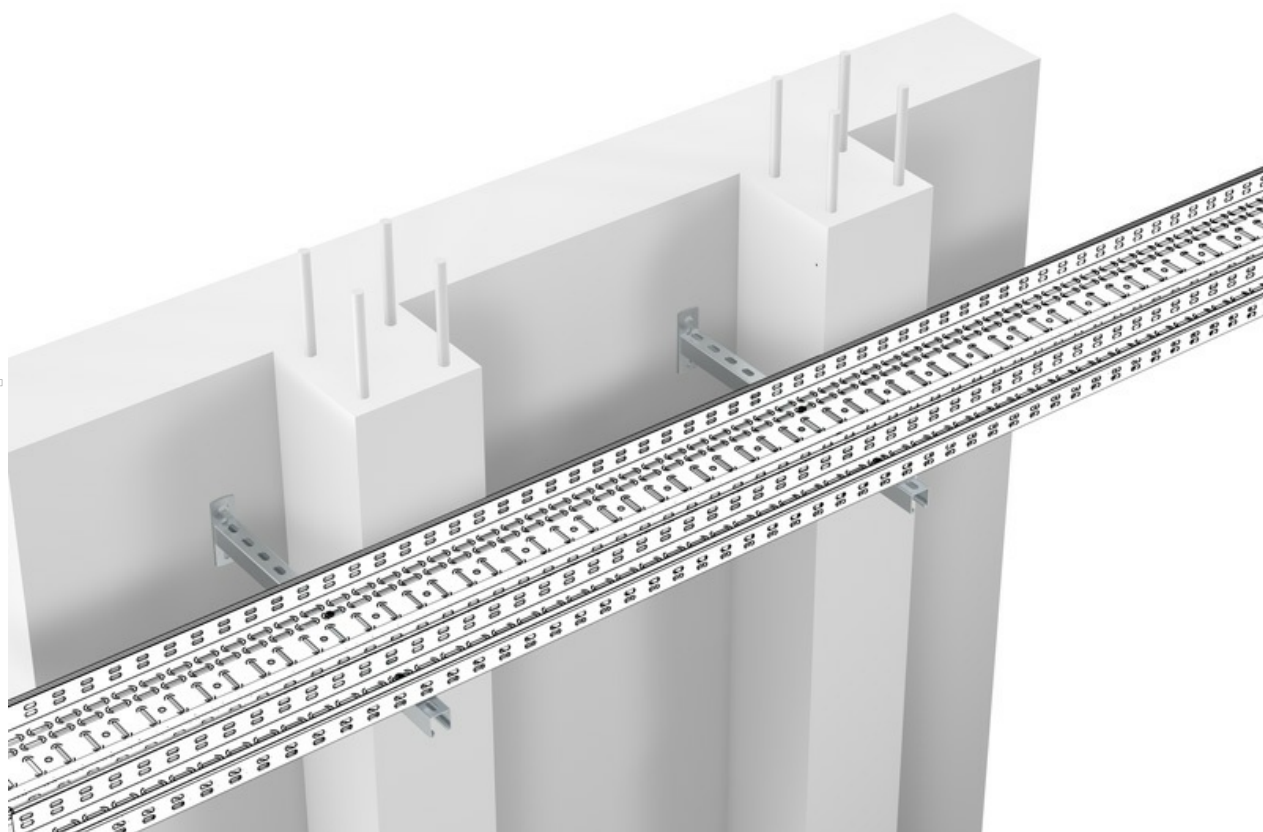

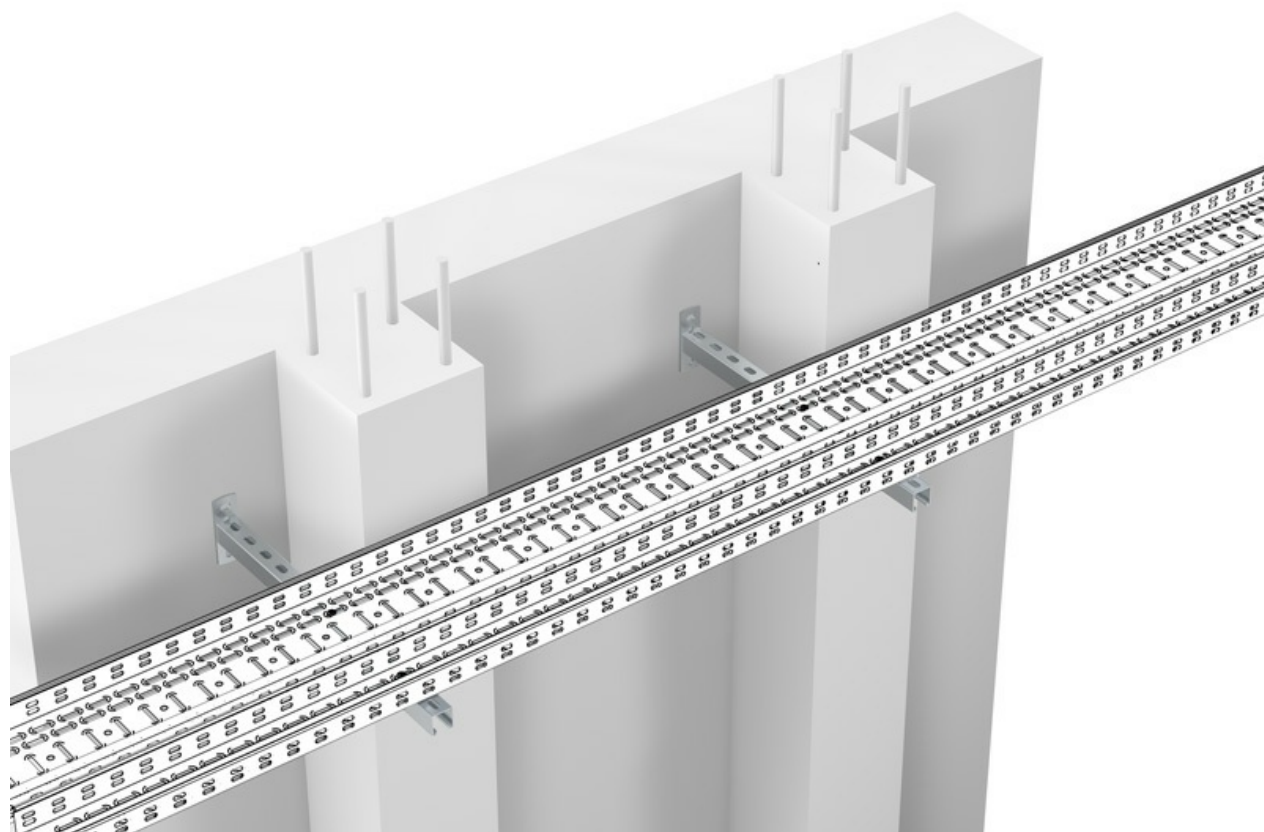


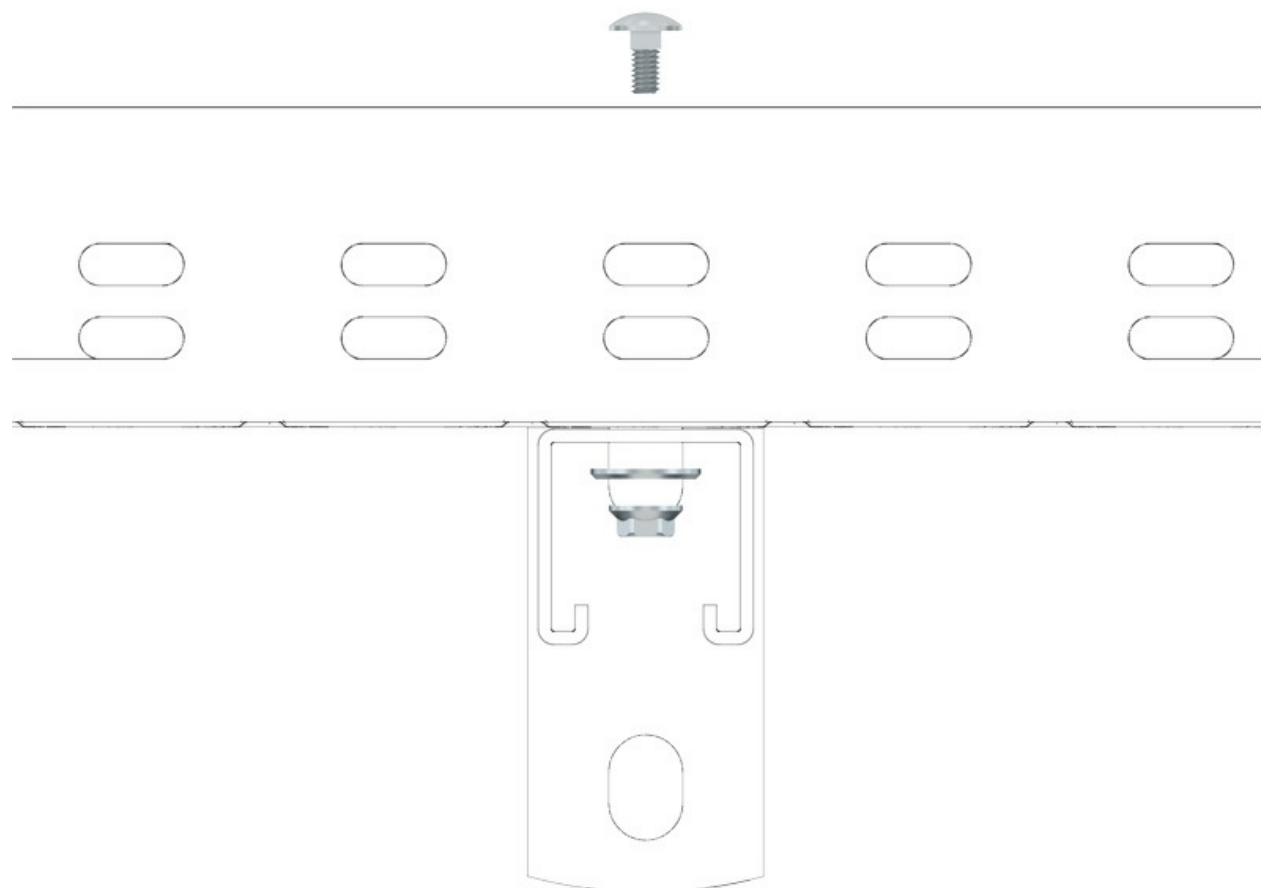

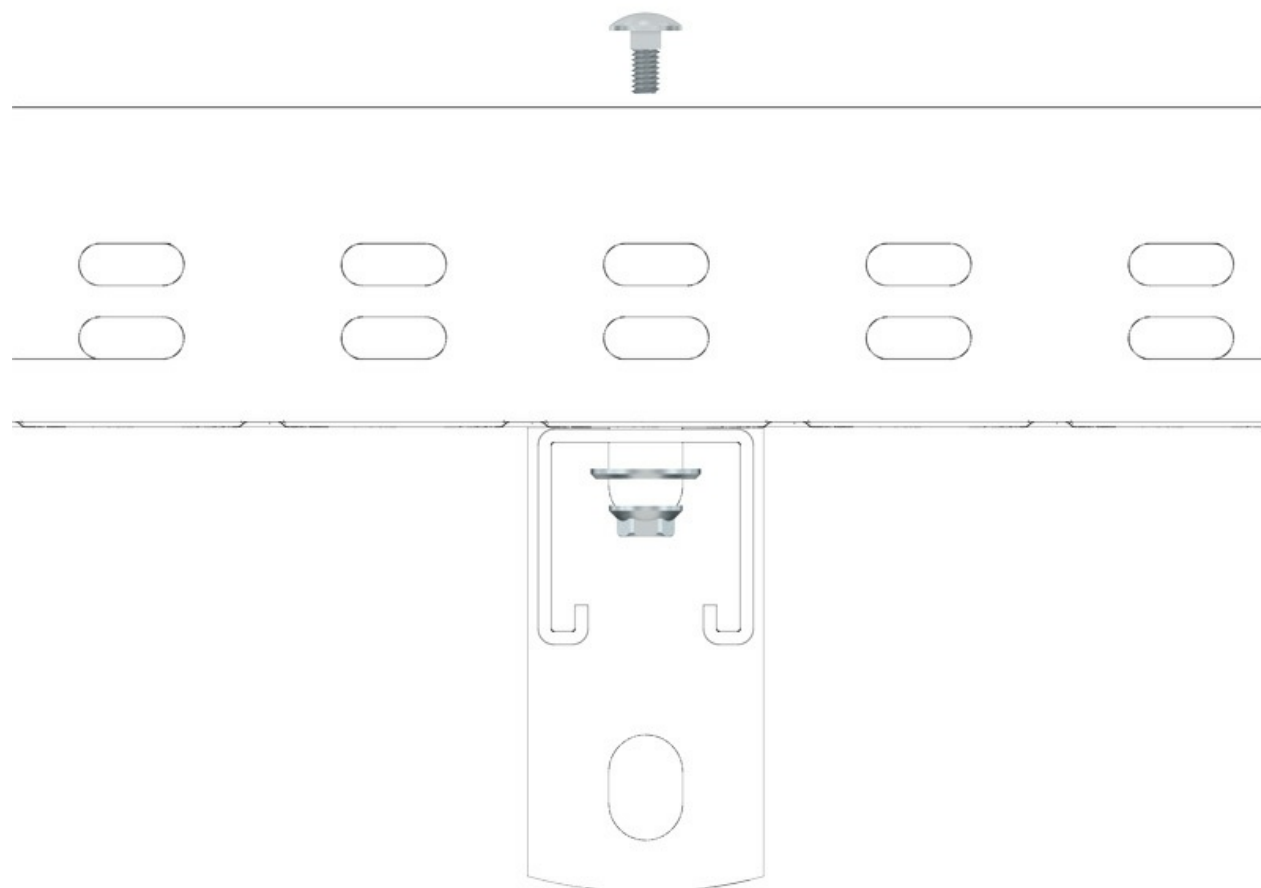

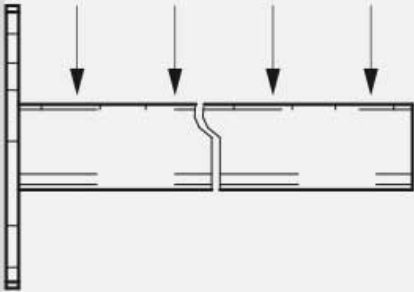↓CTA↓ (kg)	↔	kg
	200	358
	300	262
	500	165
	600	141
	800	107
	1000	85

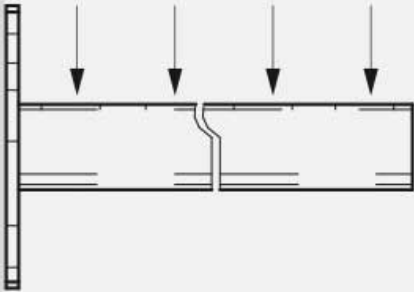

↓CTA↓ (kg)		kg
	200	358
	300	262
	500	165
	600	141
	800	107
	1000	85

