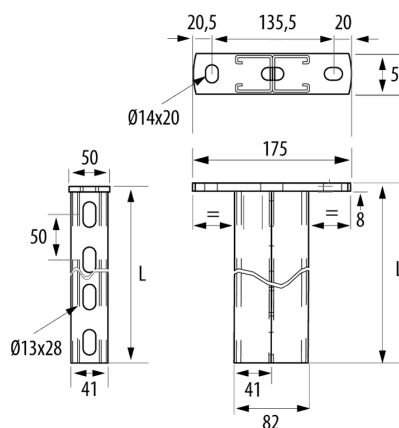


Cantilever Arm Pendants 41x82 (Ref: 82002622)



Description

41x21mm horizontal support for wall fixing of cable trays, electrical conduits and other heating pipe installations, A/C, fire protection systems, etc. Width 50 mm, With GC protection system. Excellent loading capacity. Robust and secure system. Made of steel, available in various protection systems.

Advantages

Available in PG and GC Protection Systems

Available in widths from 100 to 1000 mm depending on the protection system. It has wide fixing options.

This range of Cantilever arms 41 has a quick installation solution when using the Strut clip, part number 67030049, making it a quick and safe installation option for Rejiband® wire mesh trays.

The total length of the support is: (cable tray width + 55mm), that is, it has an additional measure of length to favor the separation of the installation from the facing or surface.

Load values according to international standard IEC 61537.

Applications

Application as a horizontal wall support. For supporting Cable Trays (rejiband®, pemsaband®, megaband®, among others) but it is also very useful for supporting electrical conduits and other heating pipe installations, A/C, fire systems etc.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Cantilever Arms 41

15/07/2026

Cantilever Arm Pendants 41x82 (Ref: 82002622)

2/4

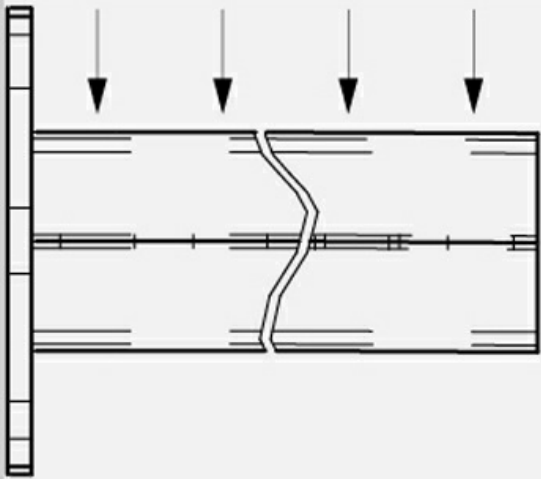
Product data			
ETIM 10		EC002400	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		8,728	
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 6	
Width (mm)		500	
kg/u		3,370	
u		1	
Material		Steel with surface coating	
SWL (kg)		376	
Working temperature range (°C)		-25 / 105 °C	
Fire resistance		A1 No combustible	

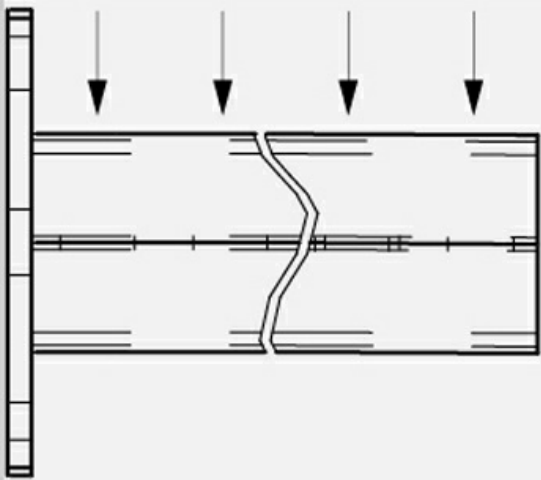
Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Cantilever Arm Pendants 41x82 (Ref: 82002622)

Load diagrams

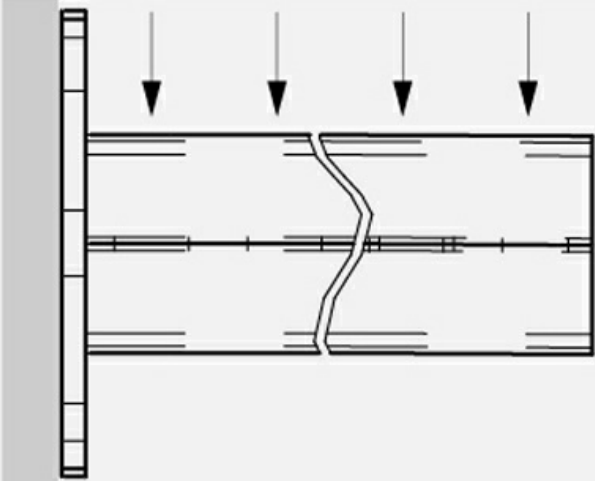
↓CTA↓ (kg)		kg
	500	376
	600	318
	800	247
	1000	198

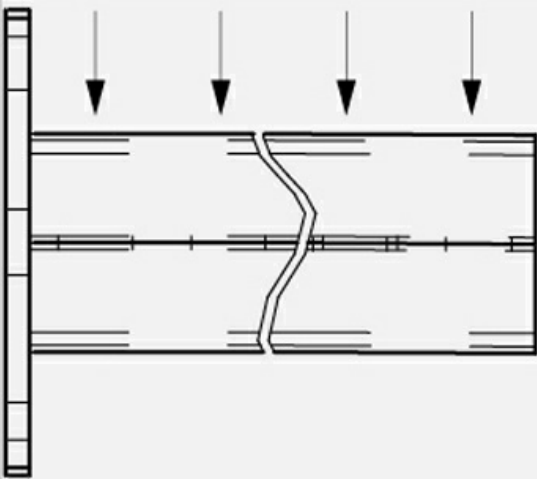
↓CTA↓ (kg)		kg
	500	376
	600	318
	800	247
	1000	198

Product applications



Cantilever Arm Pendants 41x82 (Ref: 82002622)

↓CTA↓ (kg)		⏏	kg
□□□□□ 		500	376
		600	318
		800	247
		1000	198

↓CTA↓ (kg)		⏏	kg
		500	376
		600	318
		800	247
		1000	198

