


Cantilever Arm Pendants 41x82 (Ref: 82004246)

1/6

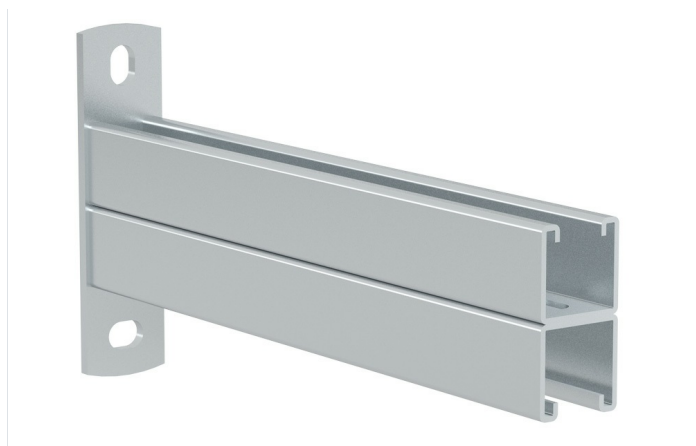

Description

41x82mm horizontal support for wall fixing of cable trays, electrical conduits and other heating pipe installations, A/C, fire protection systems, etc. Width 1000 mm, EZ3 finish. It has a reinforced structure that makes it capable of supporting very high loads. Made of steel with GC protection system.

Advantages

Available in GC Protection System

Available in widths from 500 to 1000 mm depending on the protection system. It has wide fixing options.

This range of Cantilever arms 41 has a quick installation solution when using the Strut clip, part number 67030049, making it a quick and safe installation option for Rejiband® wire mesh trays.

The total length of the support is: (cable tray width + 55mm), that is, it has an additional measure of length to favor the separation of the installation from the facing or surface.

Load values according to international standard IEC 61537.

Applications

Application as a horizontal wall support. For supporting Cable Trays (rejiband®, pemsaband®, megaband®, among others) but it is also very useful for supporting electrical conduits and other heating pipe installations, A/C, fire systems etc.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Cantilever Arms 41

15/07/2026

Cantilever Arm Pendants 41x82 (Ref: 82004246)

2/6

Product data			
ETIM 10		EC002400	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		14,818	
Protection System		EZ	
Finish		EZ3, Electrogalvanised	
Resistance Class		Class 3	
Width (mm)		1000	
kg/u		5,880	
u		1	
Material		Steel with surface coating	
Working temperature range (°C)		-25 / 105 °C	
Fire resistance		A1 No combustible	

 **Protection System**

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

 **Insulating materials**

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane


PE - Polyethylene


NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Load diagrams


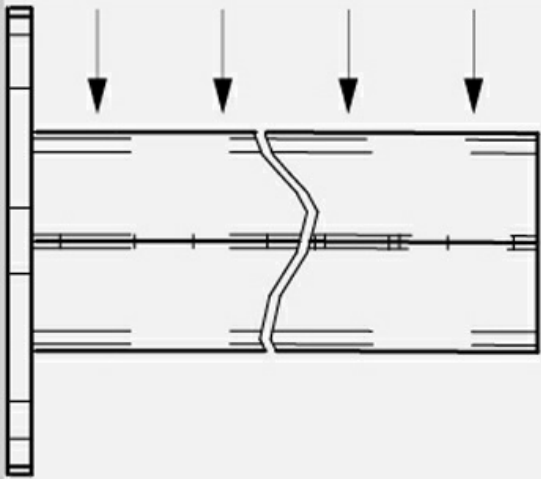
↓CTA↓ (kg)		kg
	500	376
	600	318
	800	247
	1000	198

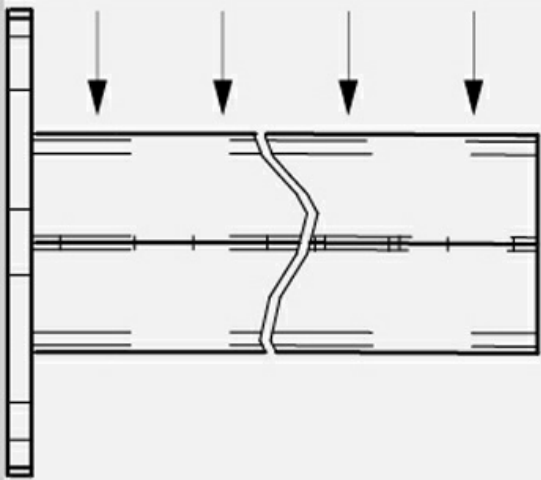↓CTA↓ (kg)		kg
	500	376
	600	318
	800	247
	1000	198

Product applications



Cantilever Arm Pendants 41x82 (Ref: 82004246)

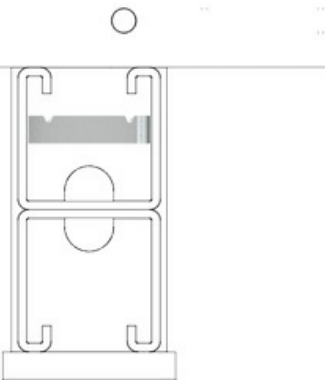
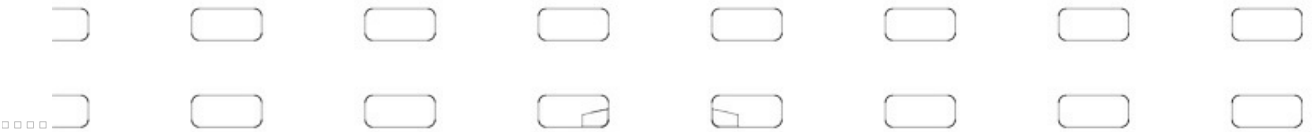


Cantilever Arms 41

15/07/2026

Cantilever Arm Pendants 41x82 (Ref: 82004246)

5/6

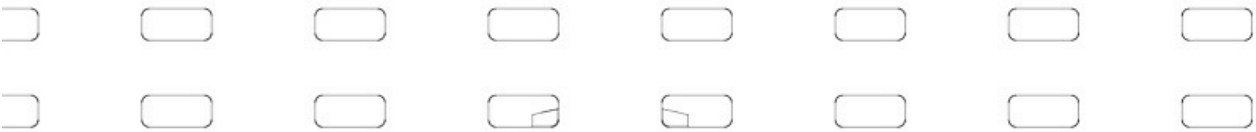



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Cantilever Arm Pendants 41x82 (Ref: 82004246)

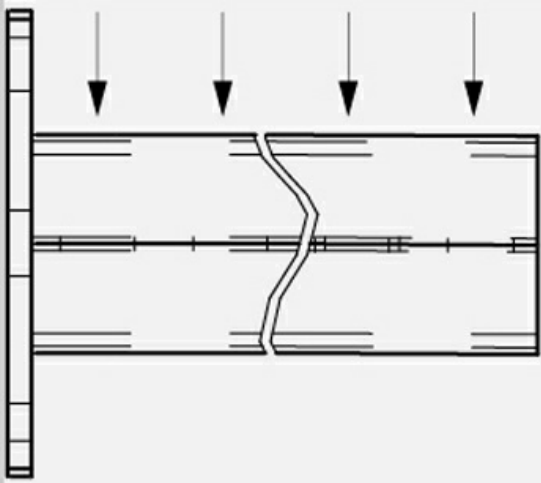↓CTA↓ (kg)	⏏	kg
	500	376
	600	318
	800	247
	1000	198

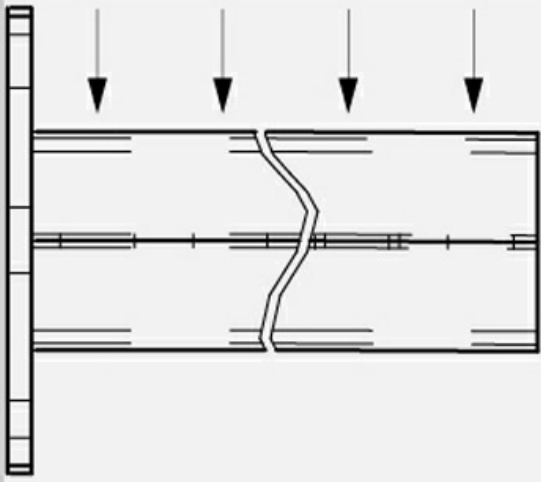↓CTA↓ (kg)	⏏	kg
	500	376
	600	318
	800	247
	1000	198

