Wall Brackets

Medium Duty Cantilever RPLUS

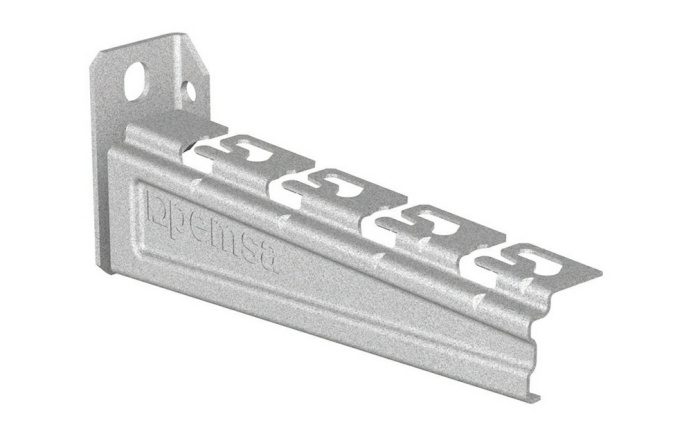

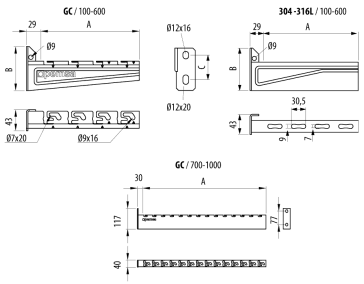

Description

Reinforced support with click system for the quick fixing of Rejiband® and Pemsaband® trays and Megaband® ladder for mounting on the wall, channel or ceiling mounted pendants. Recommended for high loads. Manufactured in steel, with various Protection Systems and available for widths of 100, 150, 200, 300 and 400 mm.

Advantages

Click system allows fast connection of the wire mesh tray without the need of fixings. Greater economy and quick assembly.

Universal mounting system compatible with Rejiband® wire mesh trays, Pemsaband® sheet trays and Megaband® ladder. A single support for all trays and ladder. Reduction in the number of references.

Structural reinforcement, which reduces the twisting and increases the load capacity.

N Mark of Aenor, in accordance with IEC 61537 and CE conformity to Directive 2014/35 / EU. Fire resistance E90 according to DIN 4102-12.

Available in several protection systems: GC, BK8 and stainless steel AISI 304 and AISI 316L.

Applications

Suitable for supporting high loads of cable trays for electrical installations and / or of telecommunications in: Civil works, tunnels, car parks, public buildings, commercial centres, large infrastructures such as: Airports, underground, rail, tertiary sector, industrial naval, petrochemical, textile, chemical and food applications, according to the finish.

Solutions

FOOD INDUSTRY PHARMACEUTICAL INDUSTRY ENERGY TUNNELS INFRASTRUCTURES FIRE RESISTANCE SOLUTION

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Medium Duty Cantilever RPLUS

Main technical characteristics

100, 150, 200, 300, 400, 500, 600, 700, 750, 800, 900, 1000	4	-50 / 150 °C	E90 (90 min. 1000°C)	ETIM 10 EC000022

Product data

S	Class IEC 61537		REF	kg/u	M	CTA (kg)
GC	Class 6	100	62035103	0,223	Steel with surface coating	225
GC	Class 6	150	62035153	0,278	Steel with surface coating	245
GC	Class 6	200	62035203	0,320	Steel with surface coating	190
GC	Class 6	300	62035303	0,414	Steel with surface coating	110
GC	Class 6	400	62035403	0,755	Steel with surface coating	245
GC	Class 6	500	62035503	0,990	Steel with surface coating	92
GC	Class 6	600	62035603	1,052	Steel with surface coating	110
GC	Class 6	700	62035703	2,452	Steel with surface coating	220
GC	Class 6	750	62035753	2,612	Steel with surface coating	220
GC	Class 6	800	62035803	2,773	Steel with surface coating	220
GC	Class 6	900	62035903	3,095	Steel with surface coating	220
GC	Class 6	1000	62035993	3,406	Steel with surface coating	220
INOX	Class 9C	100	62055103	0,211	Stainless steel AISI 304	160
INOX	Class 9C	150	62055153	0,263	Stainless steel AISI 304	190
INOX	Class 9C	200	62055203	0,302	Stainless steel AISI 304	190
INOX	Class 9C	300	62055303	0,390	Stainless steel AISI 304	130
INOX	Class 9C	400	62055403	0,719	Stainless steel AISI 304	150
INOX	Class 9C	500	62055503	0,859	Stainless steel AISI 304	110
INOX	Class 9C	600	62055603	0,996	Stainless steel AISI 304	95
INOX	Class 9D	100	62065103	0,211	Acero inoxidable AISI 316L	160
INOX	Class 9D	150	62065153	0,263	Acero inoxidable AISI 316L	190
INOX	Class 9D	200	62065203	0,302	Acero inoxidable AISI 316L	190
INOX	Class 9D	300	62065303	0,390	Acero inoxidable AISI 316L	130
INOX	Class 9D	400	62065403	0,719	Acero inoxidable AISI 316L	150
INOX	Class 9D	500	62065503	0,859	Acero inoxidable AISI 316L	110
INOX	Class 9D	600	62065603	0,996	Acero inoxidable AISI 316L	95
BK8	Class 8	100	62085103	0,215	Steel with surface coating	225
BK8	Class 8	150	62085153	0,268	Steel with surface coating	245
BK8	Class 8	200	62085203	0,308	Steel with surface coating	190
BK8	Class 8	300	62085303	0,398	Steel with surface coating	110
BK8	Class 8	400	62085403	0,731	Steel with surface coating	245
BK8	Class 8	500	62085503	0,958	Steel with surface coating	92
BK8	Class 8	600	62085603	1,012	Steel with surface coating	110

Protection System

CU - Copper electroplated

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Medium Duty Cantilever RPLUS

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Medium Duty Cantilever RPLUS

Load diagrams

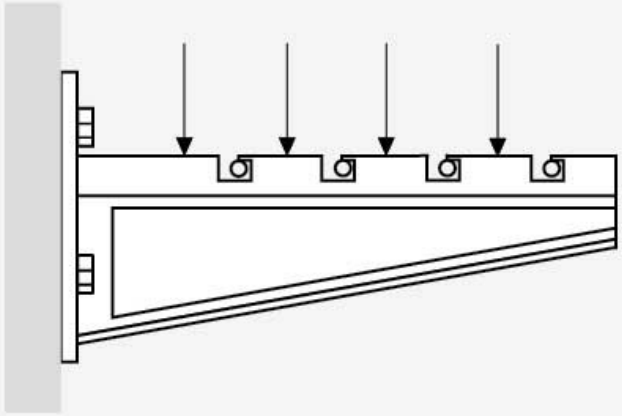

↓CTA↓ (kg)		A	kg
	GC / C8	100	225
		150	245
		200	190
		300	110
		400	245
		500	135
		600	110
		700	220
		750	220
		800	220
		900	220
		1000	220
	304 / 316 L	100	160
		150	190
		200	190
		300	130
		400	150
		500	110
		600	95

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Medium Duty Cantilever RPLUS

Product applications

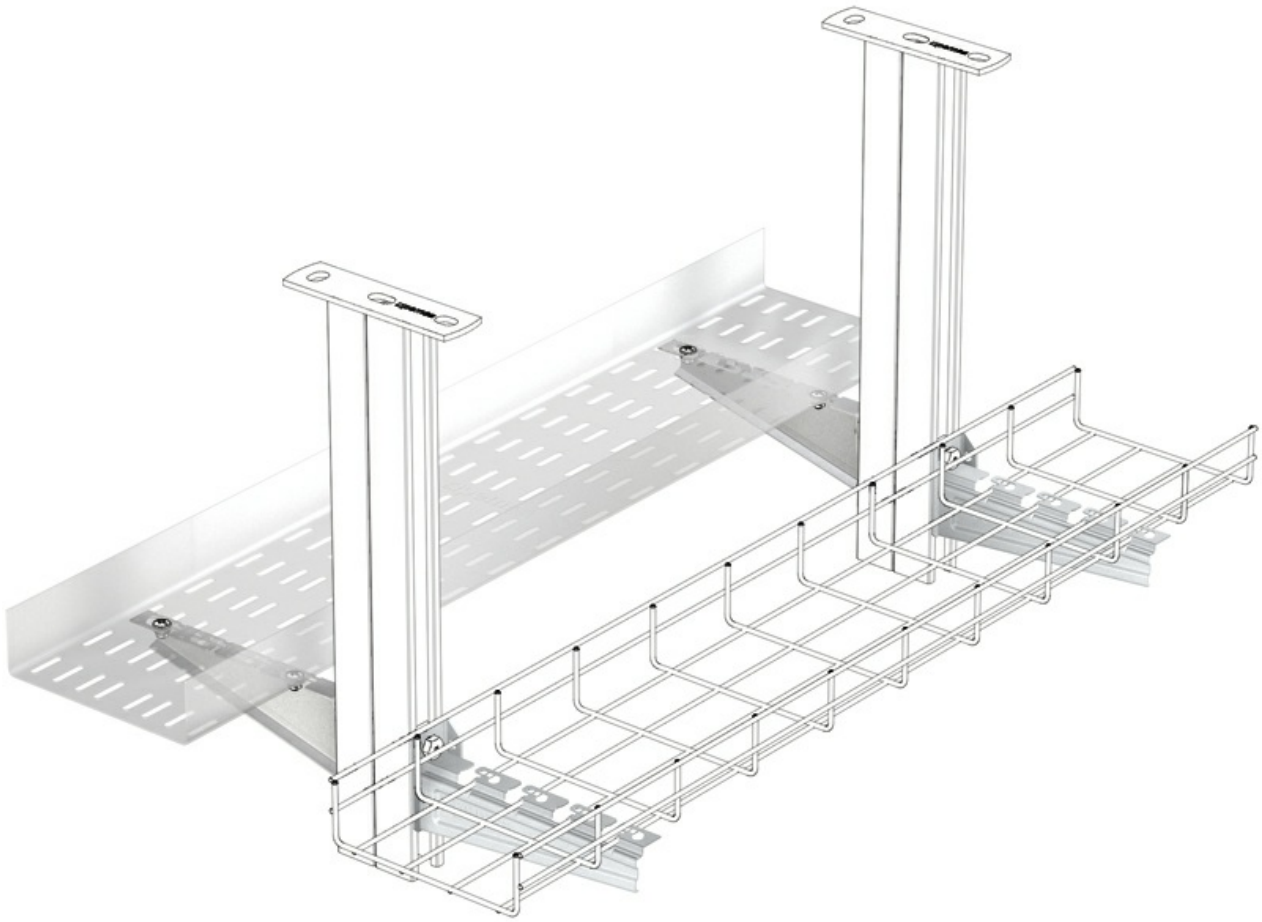

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Medium Duty Cantilever RPLUS

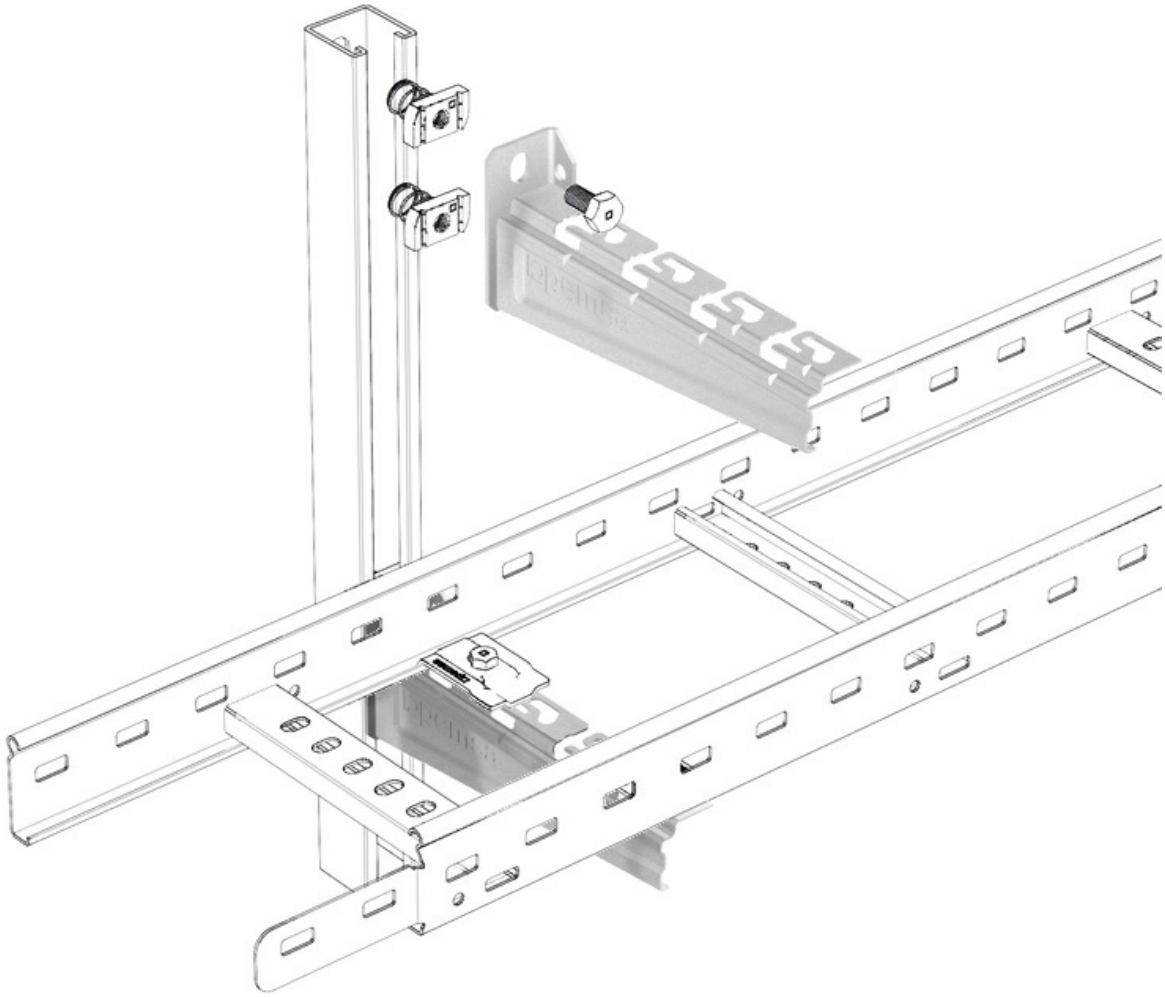

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."