
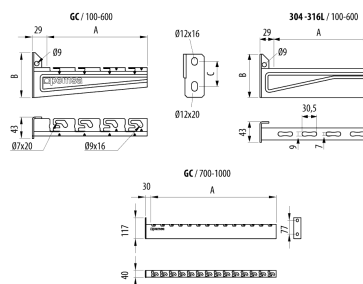


# Medium Duty Cantilever RPLUS ( Ref: 62055503 )

1/5

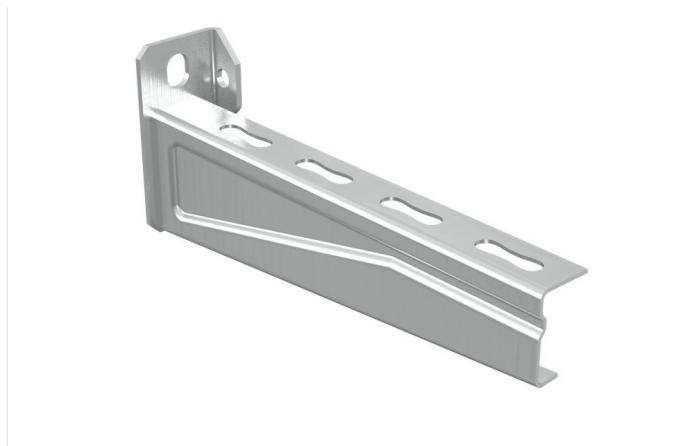

## Description

Reinforced support with click system for the quick fixing of Rejiband® and Pemsaband® trays and Megaband® ladder for mounting on the wall, channel or ceiling mounted pendants. Width 500 mm, With INOX protection system, I304 finish. Recommended for high loads. Manufactured in steel, with various Protection Systems and available for widths of 100, 150, 200, 300 and 400 mm.

## Advantages

Available in several protection systems: GC, BK8 and stainless steel AISI 304 and AISI 316L.

N Mark of Aenor, in accordance with IEC 61537 and CE conformity to Directive 2014/35 / EU. Fire resistance E90 according to DIN 4102-12.

Structural reinforcement, which reduces the twisting and increases the load capacity.

Click system allows fast connection of the wire mesh tray without the need of fixings. Greater economy and quick assembly.

Universal mounting system compatible with Rejiband® wire mesh trays, Pemsaband® sheet trays and Megaband® ladder. A single support for all trays and ladder. Reduction in the number of references.

## Applications

Suitable for supporting high loads of cable trays for electrical installations and / or of telecommunications in: Civil works, tunnels, car parks, public buildings, commercial centres, large infrastructures such as: Airports, underground, rail, tertiary sector, industrial naval, petrochemical, textile, chemical and food applications, according to the finish.

## Solutions



FOOD INDUSTRY PHARMACEUTICAL INDUSTRY ENERGY TUNNELS INFRASTRUCTURES FIRE RESISTANCE SOLUTION



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."




| Product data                          |  |                          |  |
|---------------------------------------|--|--------------------------|--|
| ETIM 10                               |  | EC000022                 |  |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  | 4,561                    |  |
| Protection System                     |  | INOX                     |  |
| Finish                                |  | Stainless Steel AISI 304 |  |
| Resistance Class                      |  | Class 9C                 |  |
| Width (mm)                            |  | 500                      |  |
| kg/u                                  |  | 0,859                    |  |
| u                                     |  | 4                        |  |
| Material                              |  | Stainless steel AISI 304 |  |
| SWL (kg)                              |  | 110                      |  |
| Working temperature range (°C)        |  | -50 / 150 °C             |  |
| Fire resistance                       |  | E90 (90 min. 1000°C)     |  |

| 🔒 Protection System               |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| 🧱 Insulating materials                    |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |

Medium Duty Cantilever RPLUS ( Ref: 62055503 )

Load diagrams

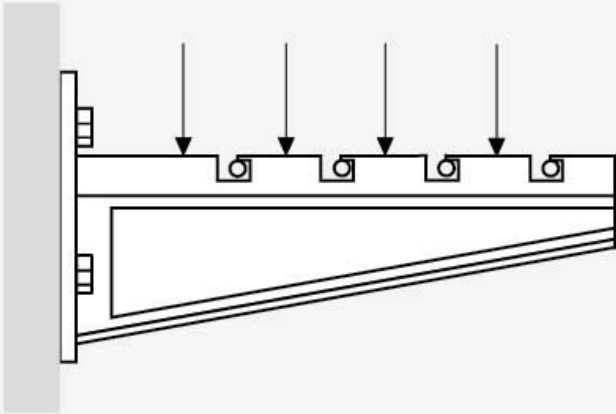
| ↓CTA↓ (kg)                                                                        |             | A    | kg  |
|-----------------------------------------------------------------------------------|-------------|------|-----|
|  | GC / C8     | 100  | 225 |
|                                                                                   |             | 150  | 245 |
|                                                                                   |             | 200  | 190 |
|                                                                                   |             | 300  | 110 |
|                                                                                   |             | 400  | 245 |
|                                                                                   |             | 500  | 135 |
|                                                                                   |             | 600  | 110 |
|                                                                                   |             | 700  | 220 |
|                                                                                   |             | 750  | 220 |
|                                                                                   |             | 800  | 220 |
|                                                                                   | 304 / 316 L | 900  | 220 |
|                                                                                   |             | 1000 | 220 |
|                                                                                   |             | 100  | 160 |
|                                                                                   |             | 150  | 190 |
|                                                                                   |             | 200  | 190 |
|                                                                                   |             | 300  | 130 |
|                                                                                   |             | 400  | 150 |
|                                                                                   |             | 500  | 110 |
|                                                                                   |             | 600  | 95  |



**Medium Duty Cantilever RPLUS** ( Ref: 62055503 )

4/5

**Product applications**

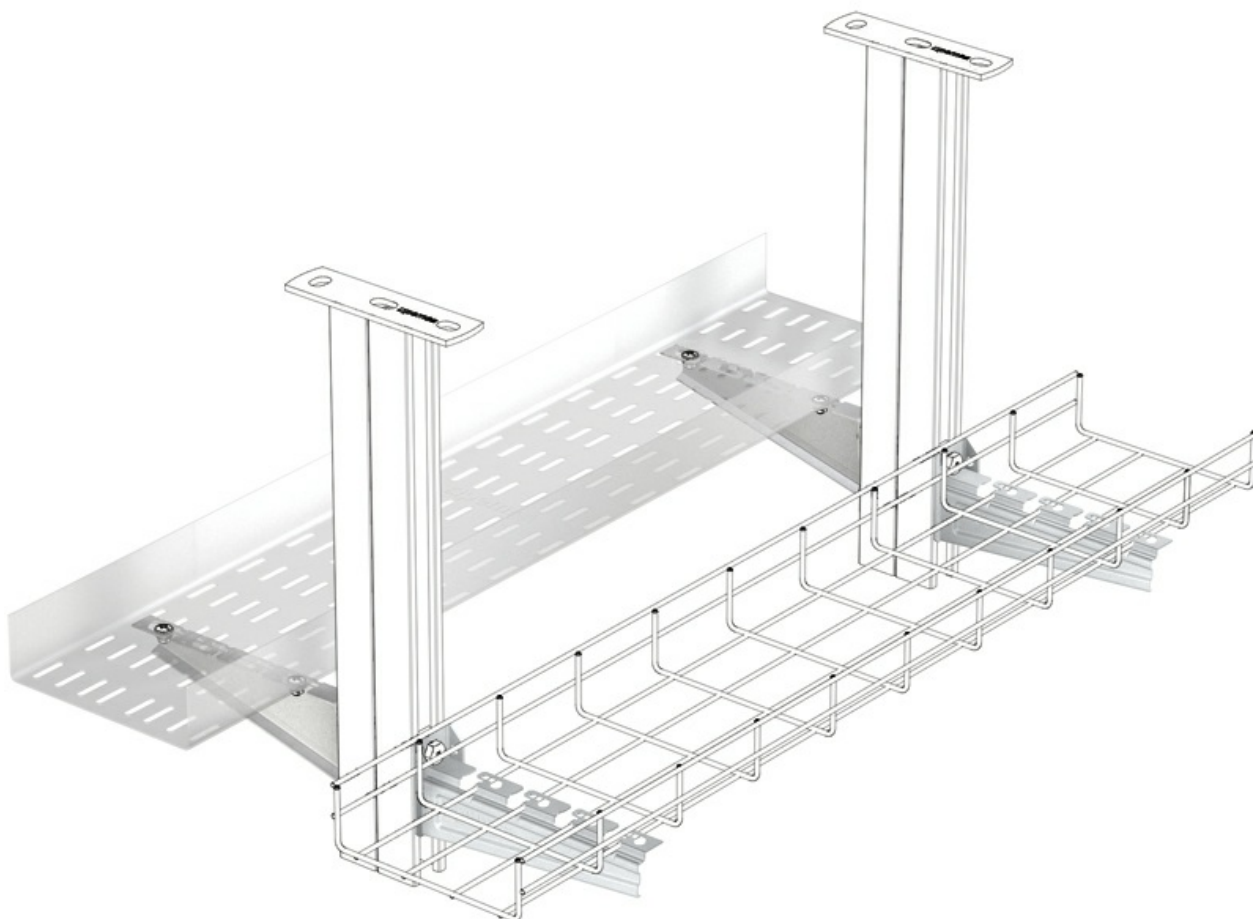

[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



**Medium Duty Cantilever RPLUS** ( Ref: 62055503 )

