
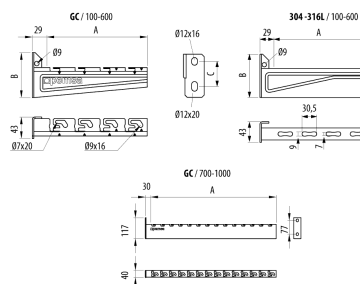


# Medium Duty Cantilever RPLUS ( Ref: 82003288 )

1/6

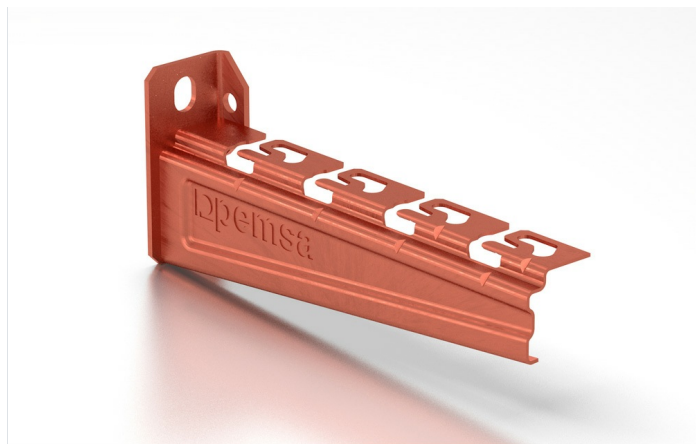

## Description

Reinforced support for Rejiband® SAFECu trays for wall mounting, wall mounting on channel or ceiling mounting installed using reinforced pendulums. Width 600 mm. Reinforced ceiling or wall support system recommended for high loads. Made from steel with CU protection system.

## Advantages

Suitable as wall support of cable trays for antimicrobial and COVID-free cable management systems

Available in 100 to 600 mm wide

CE conformity in accordance to the low voltage directive 2014 /35 /UE and the international product standard IEC 61537

Reinforced profile. Increase the performance of the support. Includes plugs to facilitate installation and protect the installer.

SAFECu Protection system, copper-plated treatment, which confers hygienic properties by eliminating bacteria, viruses and fungi

## Applications

Adecuado para soportar cargas elevadas en bandejas portacables Rejiband® SAFECu a techo para instalaciones eléctricas y/o de telecomunicaciones en: Unidades UCI y quirófanos, habitaciones y salas de espera de centros sanitarios y hospitales, nuevos desarrollos de hospitales y hospitales provisionales, centros geriátricos y asistenciales colegios, universidades y centros de enseñanza obras civiles, túneles, parkings, edificios públicos, centros comerciales, centros de proceso de datos, grandes infraestructuras, aeropuertos, líneas de metro, tren, sector terciario y aplicaciones industriales.

## Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
Protection System	CU	u	4
Finish	CU1, Copperplated	Material	Steel with surface coating
Resistance Class	Class 1	SWL (kg)	110
Width (mm)	600	Working temperature range (°C)	-50 / 150 °C
kg/u	1.022	Fire resistance	A1 No combustible

🔒 Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass


🔒 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

**Medium Duty Cantilever RPLUS** ( Ref: 82003288 )

3/6

**Product applications**

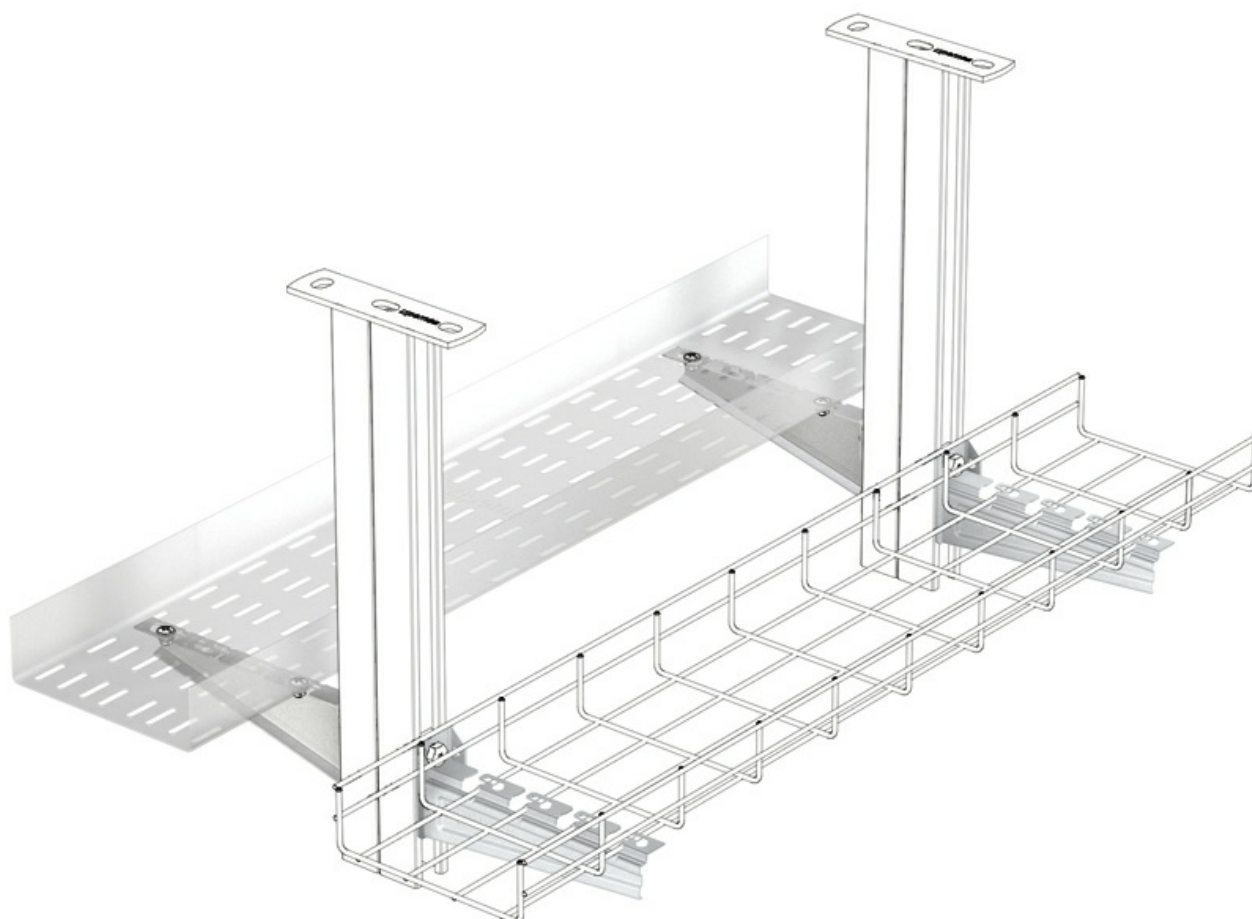


[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



**Medium Duty Cantilever RPLUS** ( Ref: 82003288 )

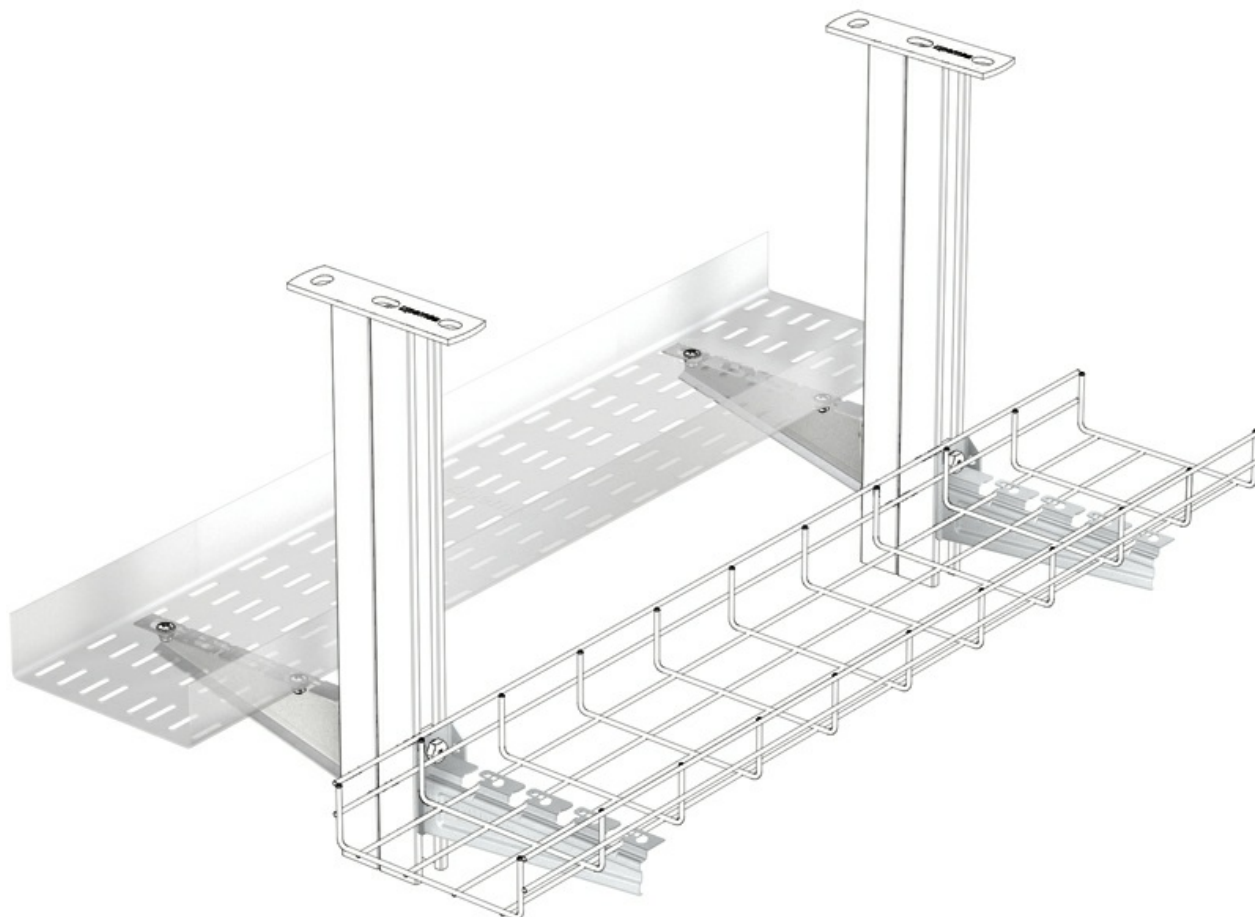

**Medium Duty Cantilever RPLUS** ( Ref: 82003288 )

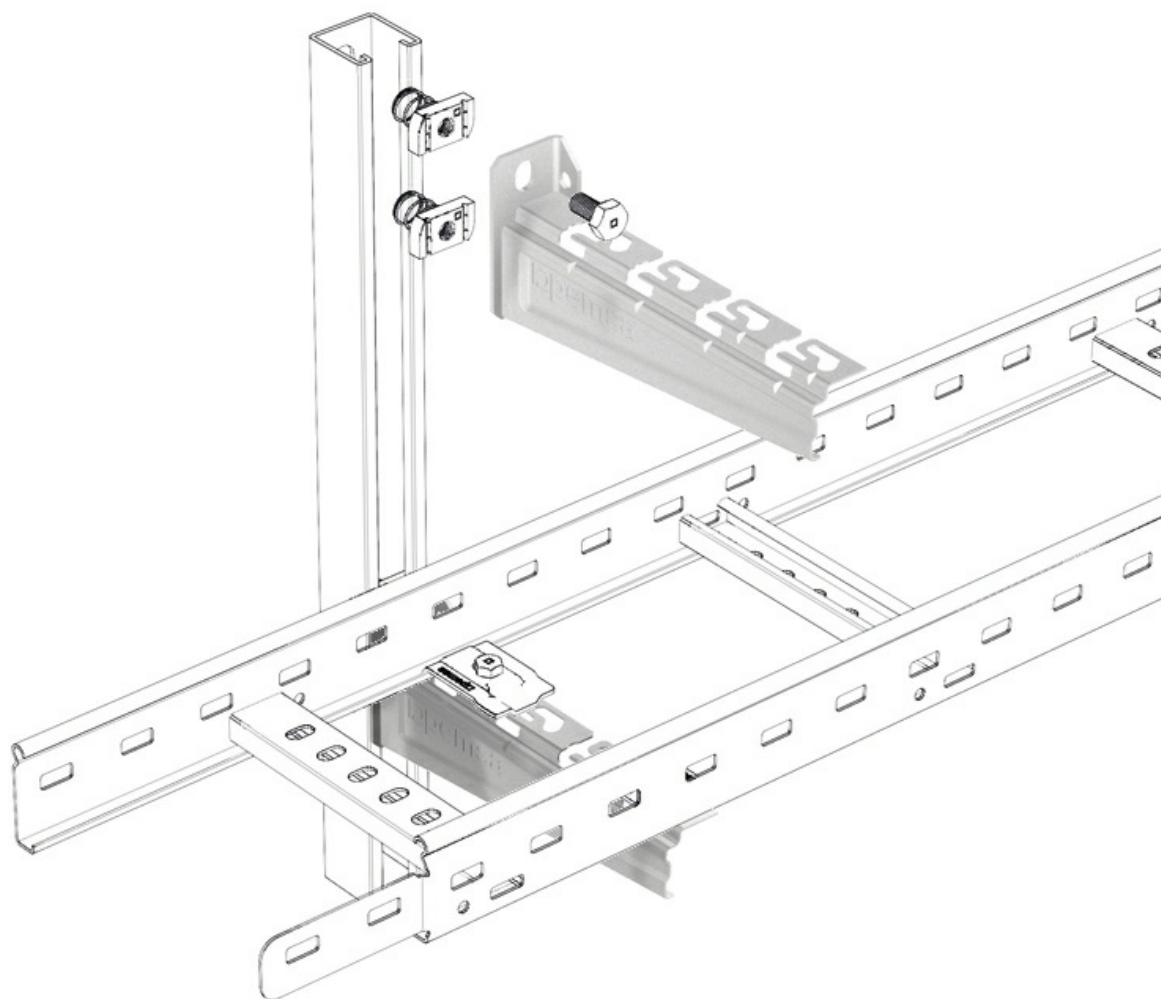

**Medium Duty Cantilever RPLUS** ( Ref: 82003288 )

