


Medium Duty Cantilever RPLUS GS

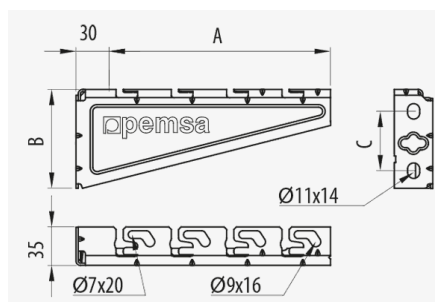

Description

Reinforced support with click system for the quick fixing of Rejiband® and Pemsaband® trays and Megaband® ladder for mounting on the wall, channel or ceiling mounted pendants. Recommended for high loads. Manufactured in steel, with various Protection Systems and available for widths of 100, 150, 200, 300 and 400 mm.

Advantages

Click system allows fast connection of the wire mesh tray without the need of fixings. Greater economy and quick assembly.

Universal mounting system compatible with Rejiband® wire mesh trays, Pemsaband® sheet trays and Megaband® ladder. A single support for all trays and ladder. Reduction in the number of references.

Structural reinforcement, which reduces the twisting and increases the load capacity.

N Mark of Aenor, in accordance with IEC 61537 and CE conformity to Directive 2014/35 / EU. Fire resistance E90 according to DIN 4102-12.

PG protection system, according to BS-EN-10142, suitable for indoor installations in industrial environments. Corrosion resistance class 3.

Applications

Suitable for supporting high loads of cable trays for electrical installations and / or of telecommunications in: Civil works, tunnels, car parks, public buildings, commercial centres, large infrastructures such as: Airports, underground, rail, tertiary sector, industrial naval, petrochemical, textile, chemical and food applications, according to the finish.

Solutions



ENERGY TUNNELS INFRASTRUCTURES FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics					
 PG	 Class 3	 100, 150, 200, 300, 400, 500, 600	 4	 Steel with surface coating	 -50 / 150 °C
 E90 (90 min. 1000°C)	ETIM 10 EC000022				


Product data			
	Ref	kg/u	
100	62025103	0,179	210
150	62025153	0,238	170
200	62025203	0,401	180
300	62025303	0,557	140
400	62025403	0,793	180
500	62025503	0,942	90
600	62025603	1,132	120

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Medium Duty Cantilever RPLUS GS


Load diagrams

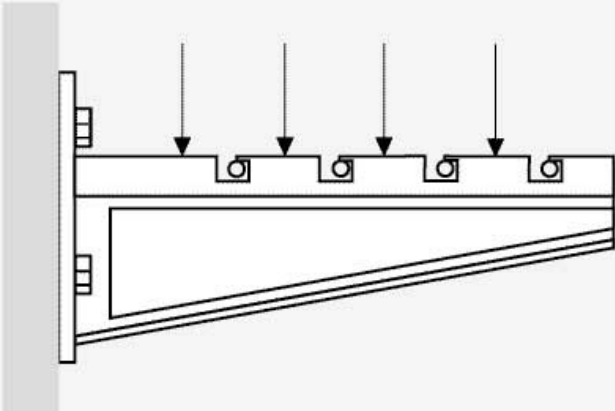↓CTA↓ (kg)	A	kg
	100	210
	150	170
	200	180
	300	140
	400	180
	500	90
	600	120


Product applications




Medium Duty Cantilever RPLUS GS

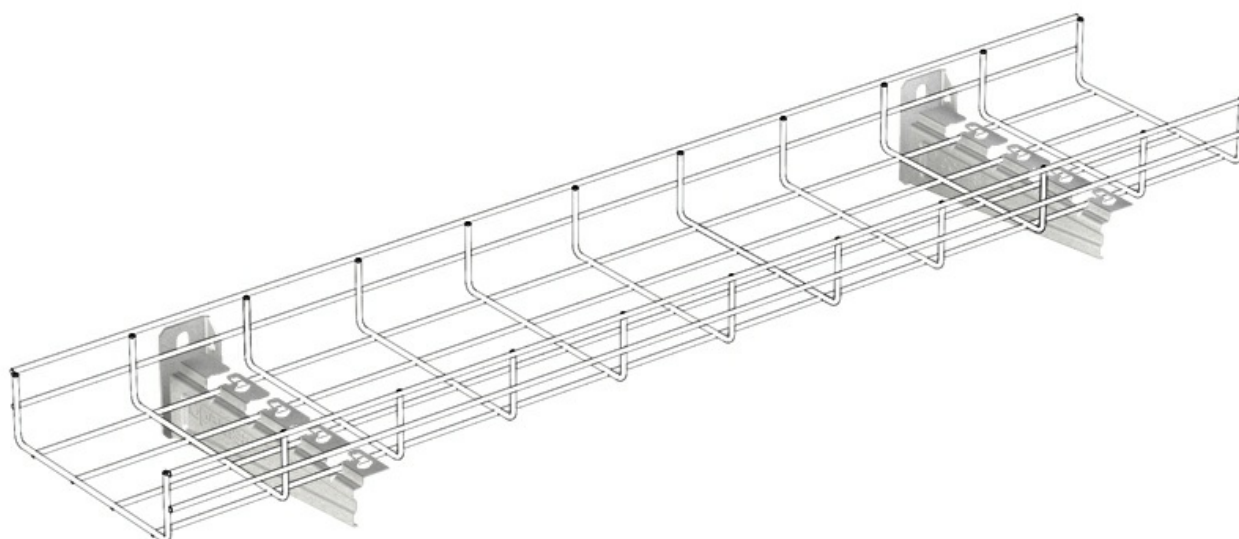

Medium Duty Cantilever RPLUS GS

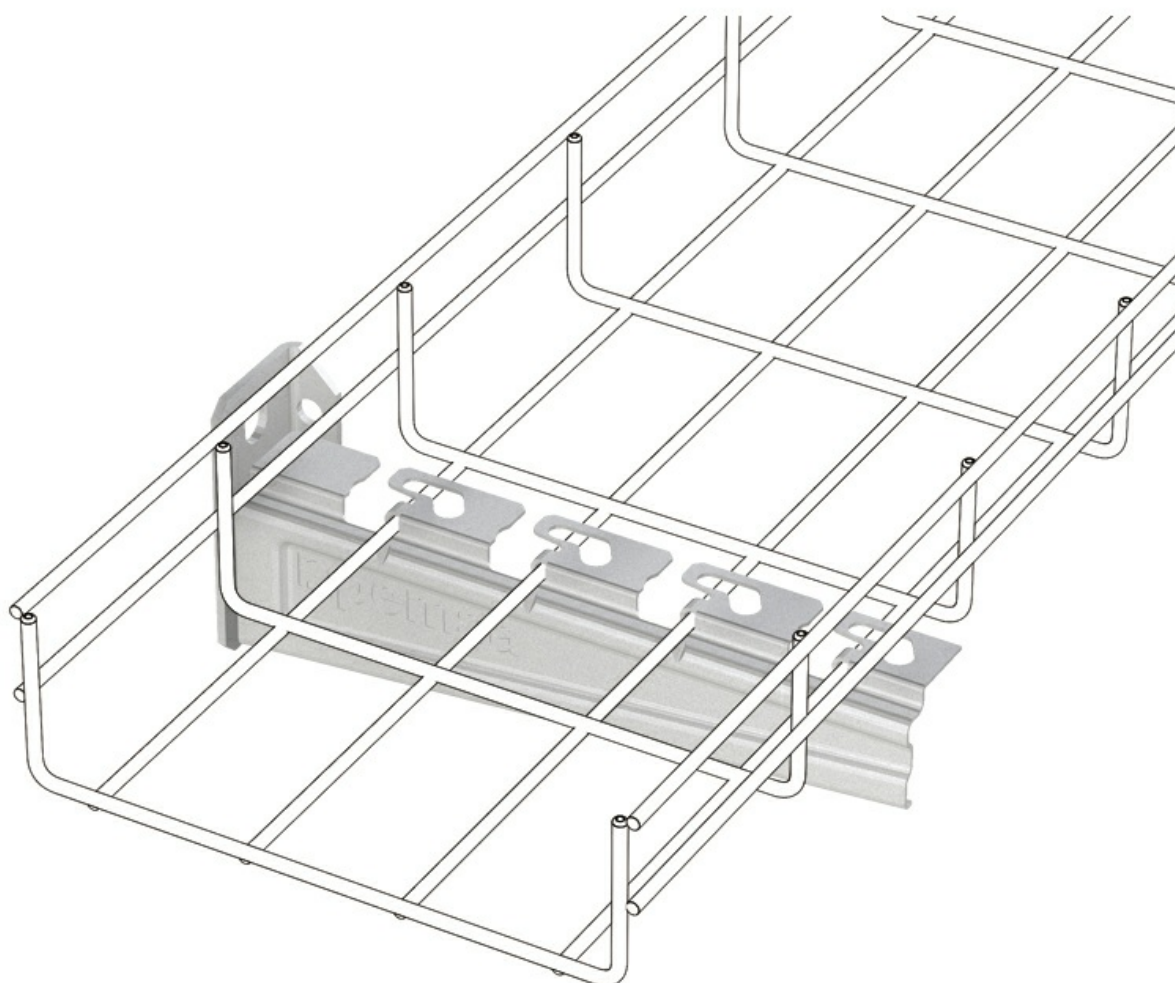

Medium Duty Cantilever RPLUS GS

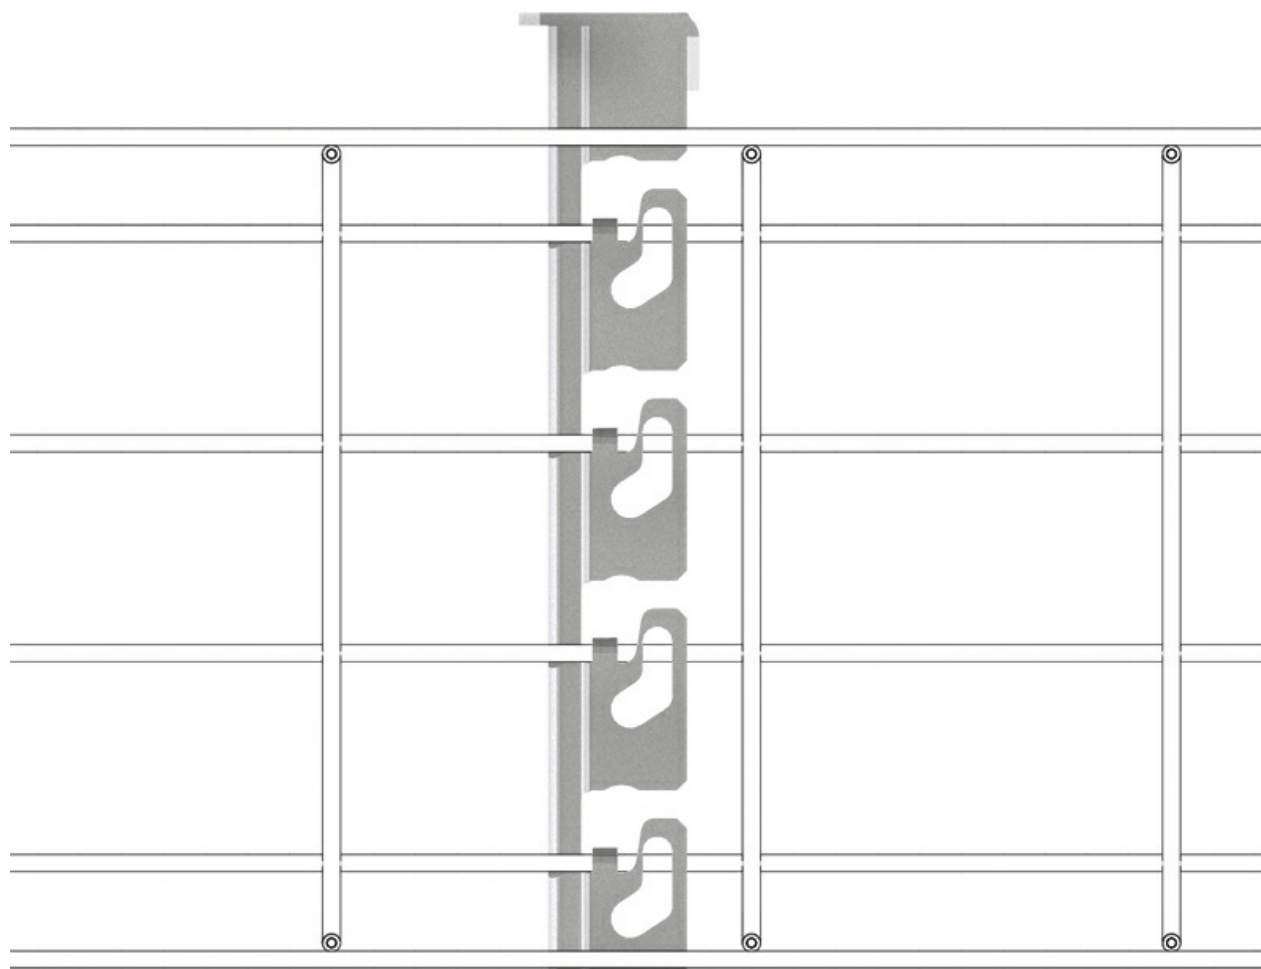

Medium Duty Cantilever RPLUS GS

