


## Support Reinforced VBL SMART

1/2

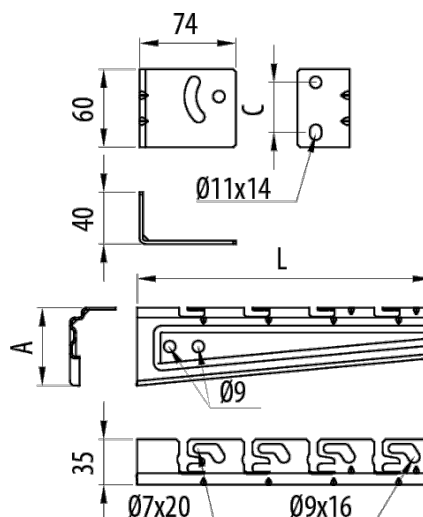

### Description

Reinforced Smart cantilever With Click system for fast fixing of Rejiband® and Pemsaband® trays and Megaband® ladder. Suitable for inclined wall mounting. Recommended for high loads. Made of steel.

### Advantages

Click system allows fast connection of the wire mesh tray without the need of fixings. Greater economy and quick assembly.

Universal mounting system compatible with Rejiband® wire mesh trays, Pemsaband® sheet trays and Megaband® ladder. A single support for all trays and ladder. Reduction in the number of references.

Structural reinforcement, which reduces the twisting and increases the load capacity.

CE conformity with regard to directive 2014/35 and standard IEC 62444.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 6.

### Applications

Suitable for supporting high loads of cable trays for electrical installations and / or of telecommunications in: Civil works, tunnels, car parks, public buildings, commercial centres, large infrastructures such as: Airports, underground, rail, tertiary sector, industrial naval, petrochemical, textile, chemical and food applications, according to the finish.

### Solutions



ENERGÍA EDIFICACIÓN. TERCIARIO TUNELES. INFRAESTRUCTURAS



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Support Reinforced VBL SMART

Main technical characteristics

 GC	 Class 6	 100, 150, 200, 300, 400	 4	 Steel with surface coating	 35	 -50 / 150 °C
 A1 No combustible	ETIM EC002403					

Product data

	Ref	kg/u
100	62038103	0.271
150	62038153	0.327
200	62038203	0.369
300	62038303	0.462
400	62038403	0.776

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

